




ARTISAN

COLLECTION

 **Cayuga** DISPLAYS

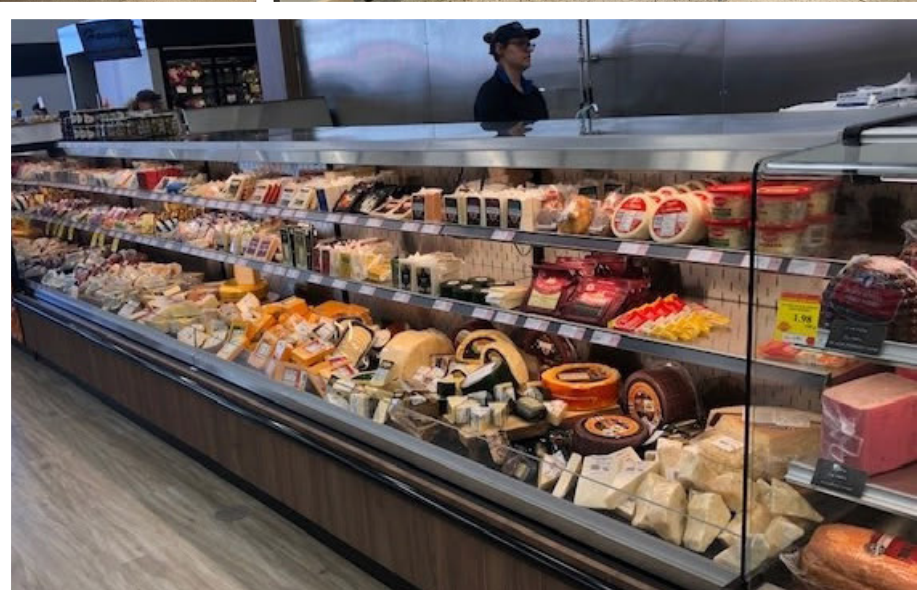







BUILD YOUR OWN LINE-UP

Cayuga understands product merchandising today is about fresh presentation, versatility and innovation. Retailers require that their showcase lineups have the flexibility to maximize their available space, but also enable them to create their own distinctive look. This is where the Artisan Collection comes in: customizable cases designed to connect and form continuous and unique lineups.

The Artisan Collection reflects the latest styles and trends in the industry - helping you keep your look and brand fresh. Designed and manufactured at our own North American facility, the entire collection is fully customizable with a variety of finishes, colours, materials and other options. The modular design allows you to create a seamless line up - from 4 to 400ft.

And when you work with Cayuga Displays, you can always be confident we'll help you to select the right product and options, so that you have the food presentation that is certain to elevate your customers' experience and enhance your brand - beautifully.

"Longo's is pleased to support Cayuga Displays. Your team's quick service/turnaround for projects has helped us with our millwork for bakery and floral in past projects. More recently your team has come up with some cost effective refrigeration solutions for our bakery and produce."

Paul Collette,
Longo's Support Center
Project Manager Real Estate
and Construction

Table of Contents

Display Index	7
Bakery	9
Delicatessen	64
Specialty	102
Important Case Information	116
How to Calculate Length of Line-up	116
Actual Case Length Calculation of Line-Up	118
Case Depths	119
Showcase Construction	120
Lift-Up Glass	120
Glass Profiles	121
Square Glass Design. Why Ours is Better	122
Front Decor Panel Styles	123
Exterior Finishes	124
Adjustability of the Cases	125
Cold and Slow Refrigeration Technology	126
Serviceability	127
LED Lighting	128
Things to Consider	129
Tips to Combat Condensation	131
Finishes	
Laminate	133
Painted Metal	135
Wood Stains	136
How to Order	137

DISPLAY INDEX

BAKERY

BFS - Bakery Full-Service Display

Flat Front Glass with Vertical Back	14
Double Curve Front Glass with Vertical Back	16
Square Front Glass with Vertical Back and Small Display Depth	18
Square Front Glass with Vertical Back and Medium Display Depth	20
Square Front Glass with Sloped Back	22
Double Curve Front Glass High-Capacity Medium Depth Display with Vertical Back	24
Square Front Glass High-Capacity Medium Depth Display with Vertical Back	26
Square Front Glass High-Capacity Small Depth Display with Vertical Back	28

BSS - Bakery Self-Service Display

Matches Flat Front Glass Service Display Profile	34
Matches Double Curve Front Glass Service Display Profile	36
Matches Square Front Glass Service Display Profile	38
Matches High-Capacity Double Curve Front Glass Medium Depth Service Display Profile	40
Matches High-Capacity Square Front Glass Medium Depth Service Display Profile	42
Matches High-Capacity Square Front Glass Small Depth Service Display Profile	44

BSD - Bakery Single Level Self-Service Display

24" Front Height with a 36" Rear Height	48
24" Front Height with a 42" & 48" Rear Height	50
18" Front Height with a 30" Rear Height	52
18" Front Height with a 36" & 42" Rear Height	54

Refrigerated Display Accessories 56

BOUW - Bakery Self-Service Display and Rear Preparation Station

Rear Cake Decorating Station with Dry Base Storage	62
--	----

DELICATESSEN

DFS - Delicatessen Full-Service Display

Flat Front Glass with Sloped Back	66
Double Curve Front Glass with Sloped Back	68
Square Front Glass with Sloped Back	70

DISPLAY INDEX

DSS - Delicatessen Self-Service Display

Matches Flat Front Glass Service Display Profile	74
Matches Double Curve Front Glass Service Display Profile	76
Matches Square Front Glass Service Display Profile	78
Matches Square Front Glass Service Display Profile	78
Matches High-Capacity Double Curve Front Glass Medium Depth Service Display Profile	80
Matches High-Capacity Square Front Glass Medium Depth Service Display Profile	82

DSD - Delicatessen Single Level Self-Service Display

24" Front Height with a 36" Rear Height	86
24" Front Height with a 42" & 48" Rear Height	88
18" Front Height with a 30" Rear Height	90
18" Front Height with a 36" & 42" Rear Height	92

Refrigerated Display Accessories 94

DOUW - Delicatessen Combination Display

Front Self-Service, Rear Food Preparation Station & Refrigerated Base Storage Cabinet	100
---	-----

SPECIALTY

SSL - Upright Self-Service Display - Remote Refrigeration

Five Level 76"H Upright Medium Depth Self-Service Display	104
Six Level 82"H Upright Medium Depth Self-Service Display	106

ISSL - Upright Self-Service Display - Remote Refrigeration

Four Level 60"H Upright Medium Depth Self-Service Display	108
Four Level 60"H Upright Medium Depth Self-Service End Cap Display	110

ISSL - Upright Self-Service Display - Remote Refrigeration

Three Level 54"H Upright Small Depth Self-Service Display	112
Three Level 54"H Upright Small Depth Self-Service End Cap Display	114




BAKERY



BFS - BAKERY FULL-SERVICE DISPLAY


Flat Front Glass with Vertical Back

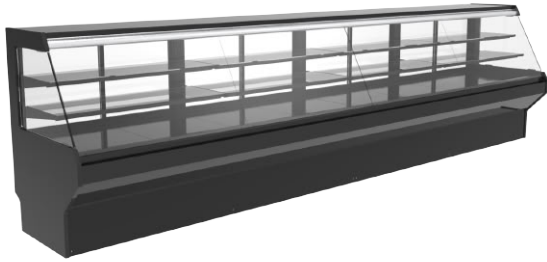

Page 14




Double Curve Front Glass with Vertical Back

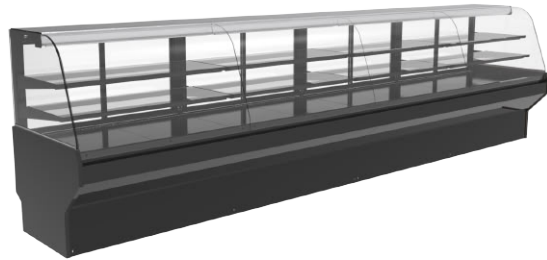

Page 16




Square Front Glass with Vertical Back and Small Display Depth

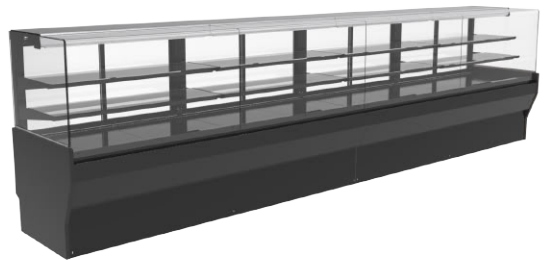

Page 18




Square Front Glass with Vertical Back and Medium Display Depth

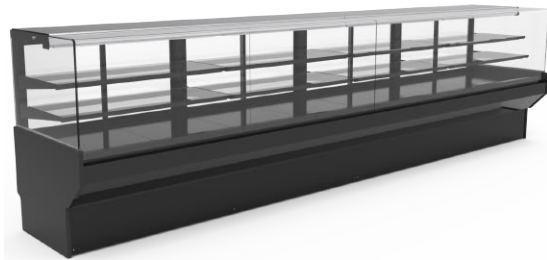

Page 20




Square Front Glass with Sloped Back

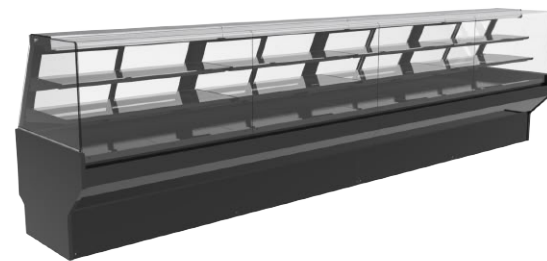

Page 22




BFS - BAKERY FULL-SERVICE DISPLAY

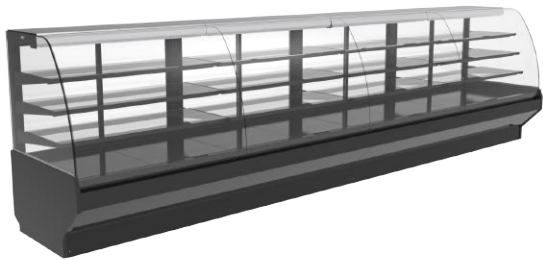


Double Curve Front Glass High-Capacity Medium Depth Display with Vertical Back

Page 24

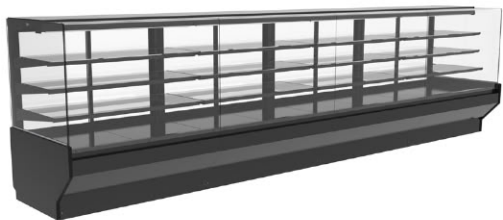

Square Front Glass High-Capacity Medium Depth Display with Vertical Back

Page 26

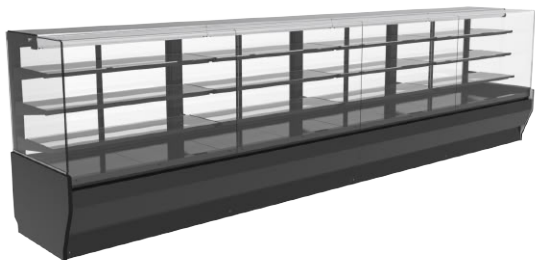

Square Front Glass High-Capacity Small Depth Display with Vertical Back


Page 28




BFS - FEATURES TO MAKE YOUR SHOWCASE WHAT YOU NEED IT TO BE



Thermal Rear Sliding Doors (Clear or Mirrored)

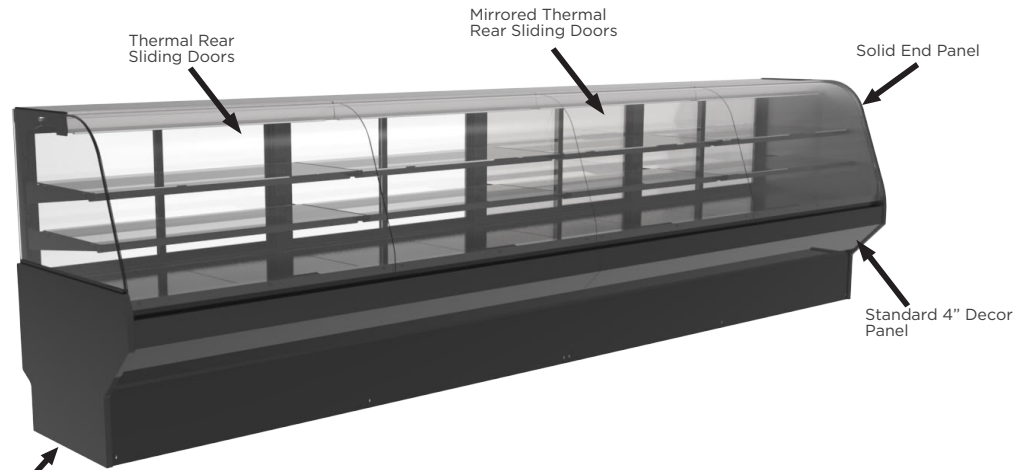

BFS-Double Curve front glass shown with Standard 4" Decor Panel

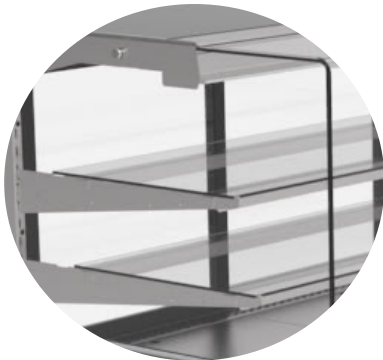

Tempered Glass Shelves



BFS-Single Curve front glass shown with Extended 12" Decor Panel



Air Duct flush with Inlays



BFS-Square front glass shown with Fully Extended Decor Panel


FLAT FRONT GLASS WITH VERTICAL BACK

BFS - BAKERY FULL-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

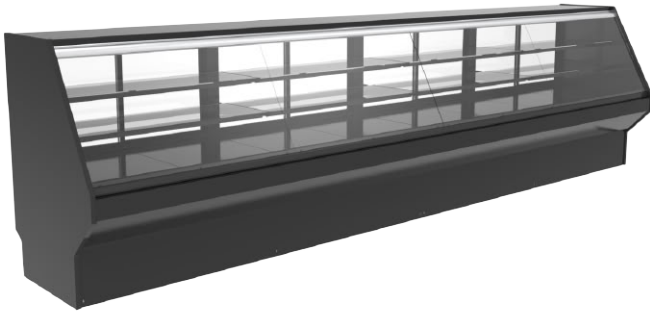

Custom options available, refer to options schedule on next page.

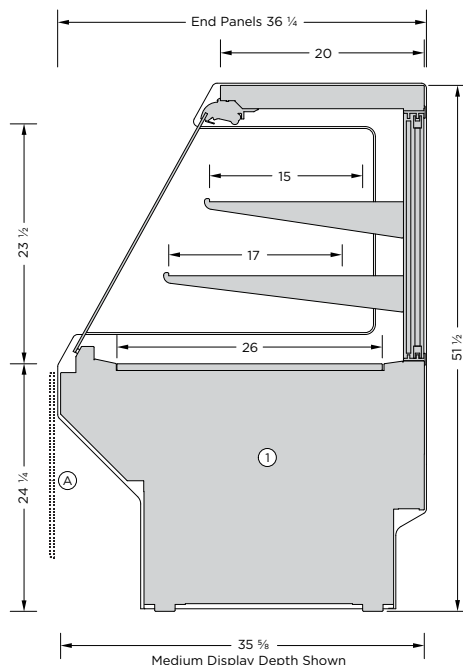

MODEL	LENGTH
BFSV-38FL-M	38 1/4"
BFSV-48FL-M	47 7/8"
BFSV-57FL-M	57 3/8"
BFSV-57FL-M	76 1/2"
BFSV-96FL-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Three display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Proprietary **Cold & Slow™** refrigeration design: high volume low velocity cooling.
- A non-refrigerated display option is available.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-15" and 1-17" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Rear sliding doors with sealed thermal glass.
- Front base décor panel options (A) provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



FLAT FRONT GLASS WITH VERTICAL BACK

BFS - BAKERY FULL-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BFSV-38FL-M	38 ¼"	115	1.9	NEMA 5-15P	2440	25F
BFSV-48FL-M	47 ⅞"	115	2.1	NEMA 5-15P	2920	25F
BFSV-57FL-M	57 ⅞"	115	2.8	NEMA 5-15P	3370	25F
BFSV-57FL-M	76 ½"	115	3.4	NEMA 5-15P	4320	25F
BFSV-96FL-M	95 ⅝"	115	3.9	NEMA 5-15P	5320	25F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-15" and 1-17" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Flat front glass.

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Small display depth 31 ¾"	
Large display depth 43 ¼"	
Hydraulic lift-up hardware	
Mirroring added to the rear sliding doors	
Ambient display	
Fold-down rear work shelf	
- White nylon top	
- Brushed stainless steel top	
Front metal clip-on signage strip	
- Add metal price tag mould	
- Add plastic sign stripping	
Additional tempered glass shelf with integrated LED lighting	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.



DOUBLE CURVE FRONT GLASS WITH VERTICAL BACK

BFS - BAKERY FULL-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

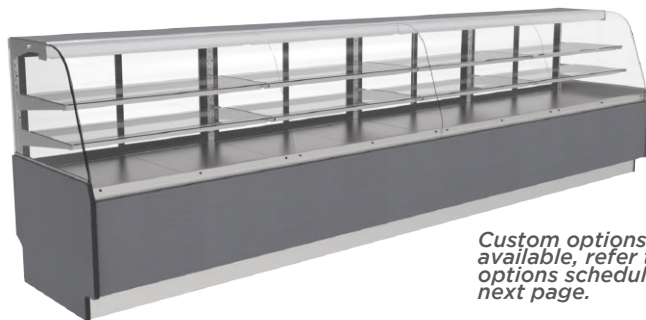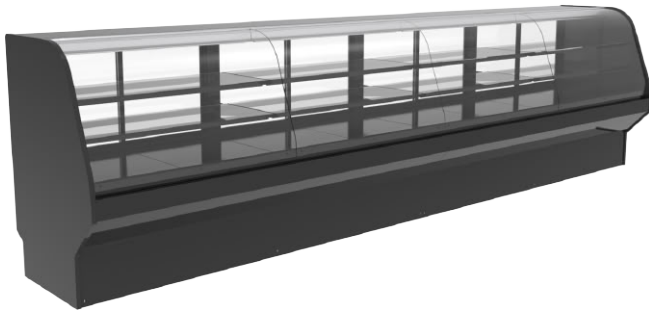

Custom options available, refer to options schedule on next page.

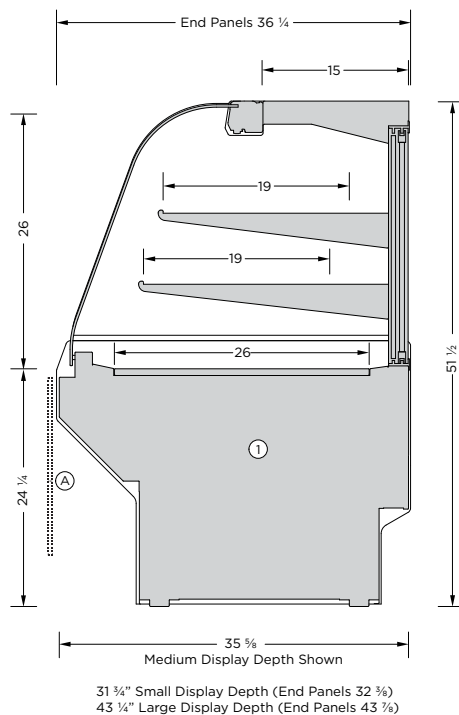


MODEL	LENGTH
BFSV-38DC-M	38 1/4"
BFSV-48DC-M	47 7/8"
BFSV-57DC-M	57 3/8"
BFSV-76DC-M	76 1/2"
BFSV-96DC-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Three display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Proprietary **Cold & Slow™** refrigeration design: high volume low velocity cooling.
- A non-refrigerated display option is available.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 2-19" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Rear sliding doors with sealed thermal glass.
- Front base décor panel options (A) provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



DOUBLE CURVE FRONT GLASS WITH VERTICAL BACK

BFS - BAKERY FULL-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BFSV-38DC-M	38 ¼"	115	1.9	NEMA 5-15P	2440	25F
BFSV-48DC-M	47 ⅞"	115	2.1	NEMA 5-15P	2920	25F
BFSV-57DC-M	57 ⅞"	115	2.8	NEMA 5-15P	3370	25F
BFSV-76DC-M	76 ½"	115	3.4	NEMA 5-15P	4320	25F
BFSV-96DC-M	95 ⅝"	115	3.9	NEMA 5-15P	5320	25F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 2-19" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Double Curve front glass.

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Small display depth 31 ¾"	
Large display depth 43 ¼"	
Hydraulic lift-up hardware	
Mirroring added to the rear sliding doors	
Ambient display	
Fold-down rear work shelf	
- White nylon top	
- Brushed stainless steel top	
Front metal clip-on signage strip	
- Add metal price tag mould	
- Add plastic sign stripping	
Additional tempered glass shelf with integrated LED lighting	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.



SQUARE FRONT GLASS WITH VERTICAL BACK AND SMALL DISPLAY DEPTH

BFS - BAKERY FULL-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

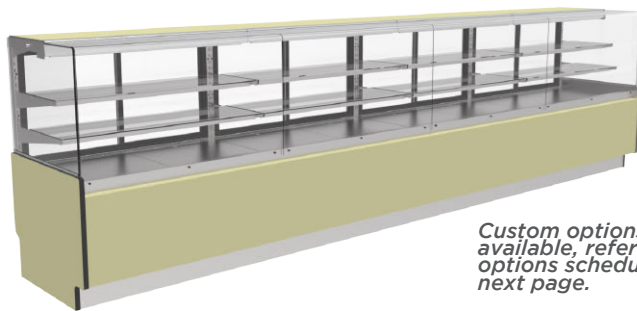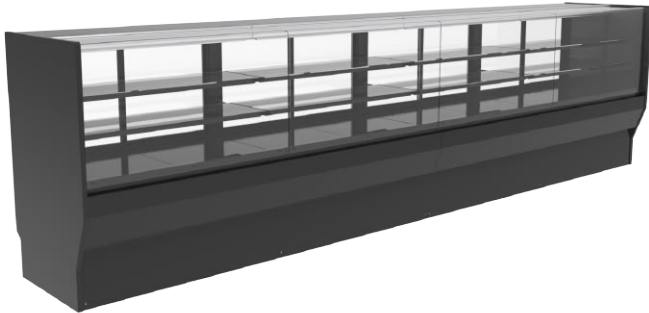

Custom options available, refer to options schedule on next page.

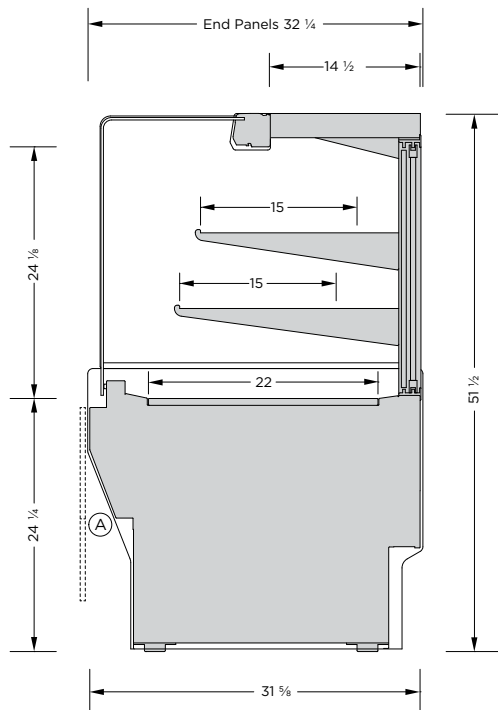


MODEL	LENGTH
BFSV-38SQ-S	38 1/4"
BFSV-48SQ-S	47 7/8"
BFSV-57SQ-S	57 3/8"
BFSV-76SQ-S	76 1/2"
BFSV-96SQ-S	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Remote or self-contained refrigeration system options.
- Proprietary **Cold & Slow™** refrigeration design: high volume low velocity cooling.
- A non-refrigerated display option is available.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 2-15" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Rear sliding doors with sealed thermal glass.
- Front base décor panel options  provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



SQUARE FRONT GLASS WITH VERTICAL BACK AND SMALL DISPLAY DEPTH

BFS - BAKERY FULL-SERVICE DISPLAY

REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BFSV-38SQ-S	38 ¼"	115	1.9	NEMA 5-15P	2440	25F
BFSV-48SQ-S	47 ⅞"	115	2.1	NEMA 5-15P	2920	25F
BFSV-57SQ-S	57 ⅞"	115	2.8	NEMA 5-15P	3370	25F
BFSV-76SQ-S	76 ½"	115	3.4	NEMA 5-15P	4320	25F
BFSV-96SQ-S	95 ⅝"	115	3.9	NEMA 5-15P	5320	25F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 31 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 2-15" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Square front glass.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Hydraulic lift-up hardware	
Mirroring added to the rear sliding doors	
Ambient display	
Fold-down rear work shelf	
- White nylon top	
- Brushed stainless steel top	
Front metal clip-on signage strip	
- Add metal price tag mould	
- Add plastic sign stripping	
Additional tempered glass shelf with integrated LED lighting	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty



SQUARE FRONT GLASS WITH VERTICAL BACK AND MEDIUM DISPLAY DEPTH

BFS - BAKERY FULL-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

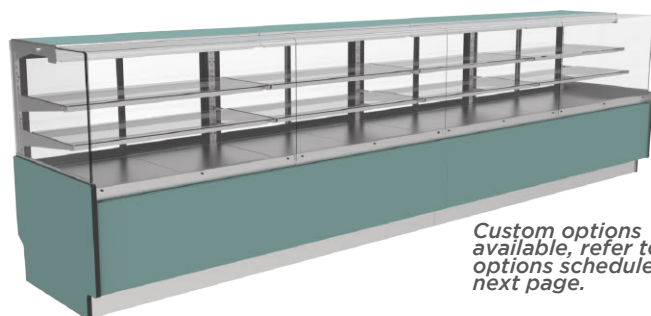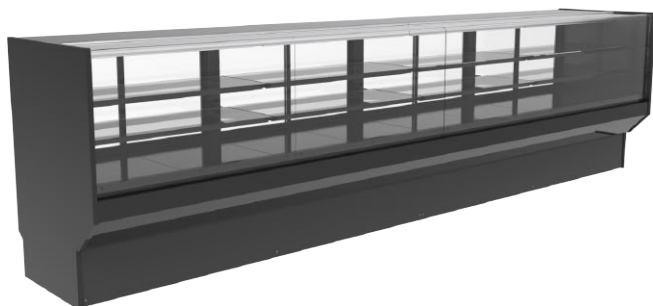

Custom options available, refer to options schedule on next page.

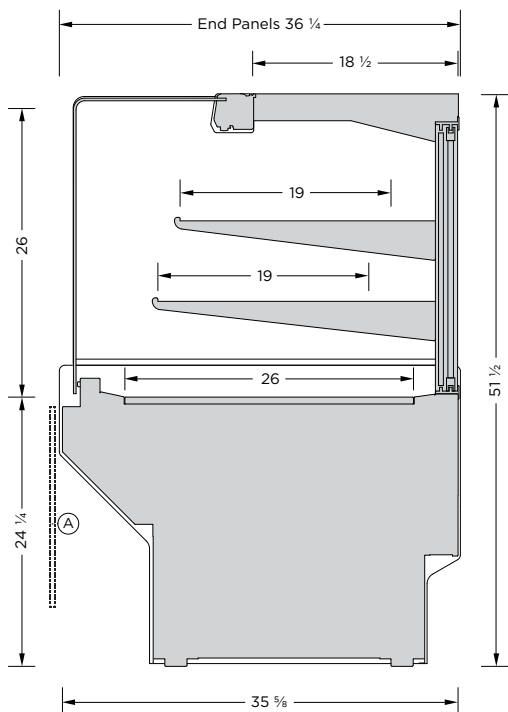


MODEL	LENGTH
BFSV-38SQ-M	38 1/4"
BFSV-48SQ-M	47 7/8"
BFSV-57SQ-M	57 3/8"
BFSV-76SQ-M	76 1/2"
BFSV-96SQ-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Remote or self-contained refrigeration system options.
- Proprietary **Cold & Slow™** refrigeration design: high volume low velocity cooling.
- A non-refrigerated display option is available.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 2-19" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Rear sliding doors with sealed thermal glass.
- Front base décor panel options  provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



SQUARE FRONT GLASS WITH VERTICAL BACK AND MEDIUM DISPLAY DEPTH

BFS - BAKERY FULL-SERVICE DISPLAY

REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BFSV-38SQ-M	38 ¼"	115	1.9	NEMA 5-15P	2440	25F
BFSV-48SQ-M	47 ⅞"	115	2.1	NEMA 5-15P	2920	25F
BFSV-57SQ-M	57 ⅞"	115	2.8	NEMA 5-15P	3370	25F
BFSV-76SQ-M	76 ½"	115	3.4	NEMA 5-15P	4320	25F
BFSV-96SQ-M	95 ⅝"	115	3.9	NEMA 5-15P	5320	25F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 2-19" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Square front glass.

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Hydraulic lift-up hardware	
Mirroring added to the rear sliding doors	
Ambient display	
Fold-down rear work shelf	
- White nylon top	
- Brushed stainless steel top	
Front metal clip-on signage strip	
- Add metal price tag mould	
- Add plastic sign stripping	
Additional tempered glass shelf with integrated LED lighting	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:


- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

SQUARE FRONT GLASS WITH SLOPED BACK


BFS - BAKERY FULL-SERVICE DISPLAY

 REFRIGERATED


CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

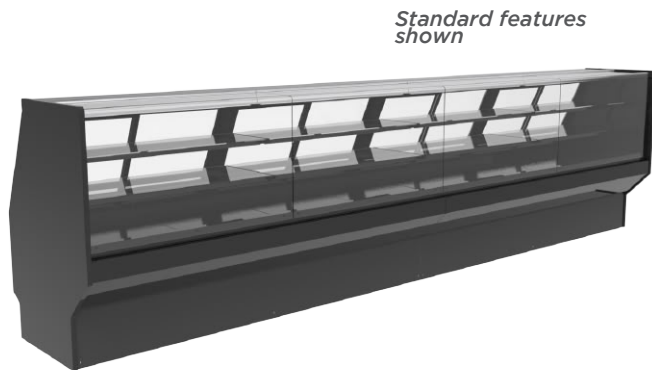

Standard features shown

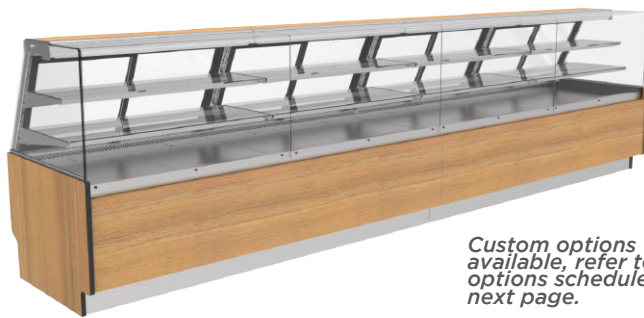

Custom options available, refer to options schedule on next page.

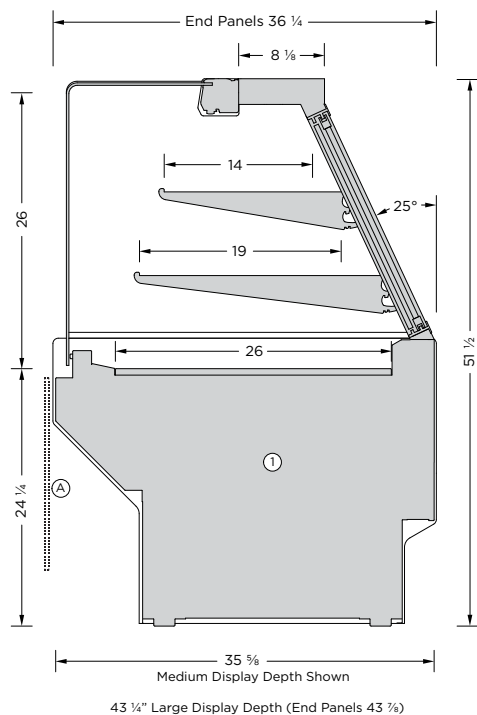

MODEL	LENGTH
BFSS-38SQ-M	38 1/4"
BFSS-48SQ-M	47 7/8"
BFSS-57SQ-M	57 3/8"
BFSS-76SQ-M	76 1/2"
BFSS-96SQ-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Large display depth available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Proprietary **Cold & Slow™** refrigeration design: high volume low velocity cooling.
- A non-refrigerated display option is available.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-14" and 1-19" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Rear sliding doors with sealed thermal glass.
- Front base décor panel options A provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



SQUARE FRONT GLASS WITH SLOPED BACK

BFS - BAKERY FULL-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BFSS-38SQ-M	38 ¼"	115	1.9	NEMA 5-15P	2440	25F
BFSS-48SQ-M	47 ⅞"	115	2.1	NEMA 5-15P	2920	25F
BFSS-57SQ-M	57 ⅞"	115	2.8	NEMA 5-15P	3370	25F
BFSS-76SQ-M	76 ½"	115	3.4	NEMA 5-15P	4320	25F
BFSS-96SQ-M	95 ⅝"	115	3.9	NEMA 5-15P	5320	25F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-14" and 1-19" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Square front glass.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS	
The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS	
Large display depth 43 ¼"	
Mirroring added to the rear sliding doors	
Ambient display	
Fold-down rear work shelf	
- White nylon top	
- Brushed stainless steel top	
Front metal clip-on signage strip	
- Add metal price tag mould	
- Add plastic sign stripping	
Additional tempered glass shelf with integrated LED lighting	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warrant



DOUBLE CURVE FRONT GLASS HIGH-CAPACITY MEDIUM DEPTH DISPLAY WITH VERTICAL BACK

BFS - BAKERY FULL-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

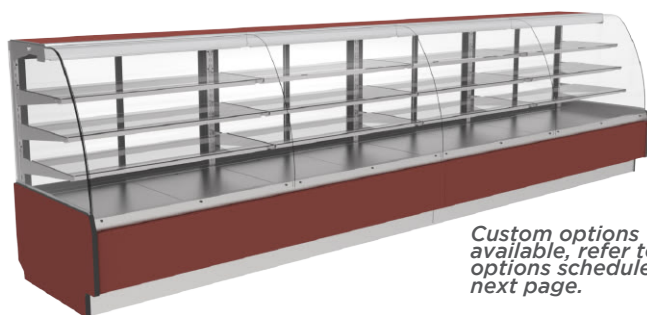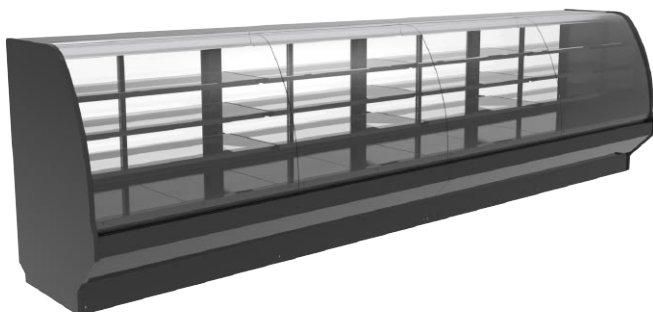

Custom options available, refer to options schedule on next page.

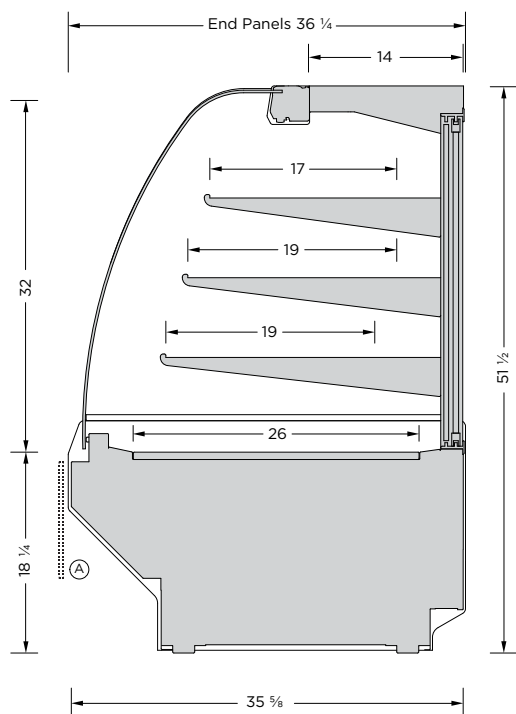


MODEL	LENGTH
BFSH-38DC-M	38 1/4"
BFSH-48DC-M	47 7/8"
BFSH-57DC-M	57 3/8"
BFSH-76DC-M	76 1/2"
BFSH-96DC-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Remote refrigeration option only for this display profile.
- Proprietary **Cold & Slow™** refrigeration design: high volume low velocity cooling.
- A non-refrigerated display option is available.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-17" and 2-19" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Rear sliding doors with sealed thermal glass.
- Front base décor panel options  provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



DOUBLE CURVE FRONT GLASS HIGH-CAPACITY MEDIUM DEPTH DISPLAY WITH VERTICAL BACK

BFS - BAKERY FULL-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BFSH-38DC-M	38 ¼"	115	1.9	NEMA 5-15P	2440	25F
BFSH-48DC-M	47 ⅞"	115	2.1	NEMA 5-15P	2920	25F
BFSH-57DC-M	57 ⅞"	115	2.8	NEMA 5-15P	3370	25F
BFSH-76DC-M	76 ½"	115	3.4	NEMA 5-15P	4320	25F
BFSH-96DC-M	95 ⅝"	115	3.9	NEMA 5-15P	5320	25F

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-17" and 2-19" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Double Curve front glass

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Mirroring added to the rear sliding doors	
Ambient display	
Fold-down rear work shelf	
- White nylon top	
- Brushed stainless steel top	
Front metal clip-on signage strip	
- Add metal price tag mould	
- Add plastic sign stripping	
Additional tempered glass shelf with integrated LED lighting	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.


SQUARE FRONT GLASS HIGH-CAPACITY MEDIUM DEPTH DISPLAY WITH VERTICAL BACK

BFS - BAKERY FULL-SERVICE DISPLAY

 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

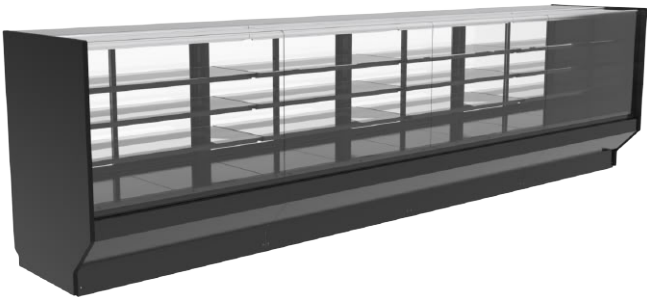

Custom options available, refer to options schedule on next page.


MODEL	LENGTH
BFSH-38SQ-M	38 ¼"
BFSH-48SQ-M	47 7⁄8"
BFSH-57SQ-M	57 ¾"
BFSH-76SQ-M	76 ½"
BFSH-96SQ-M	95 5⁄8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Remote refrigeration option only for this display profile.
- Proprietary **Cold & Slow™** refrigeration design: high volume low velocity cooling.
- A non-refrigerated display option is available.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-17" and 2-19" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Rear sliding doors with sealed thermal glass.
- Front base décor panel options  provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.

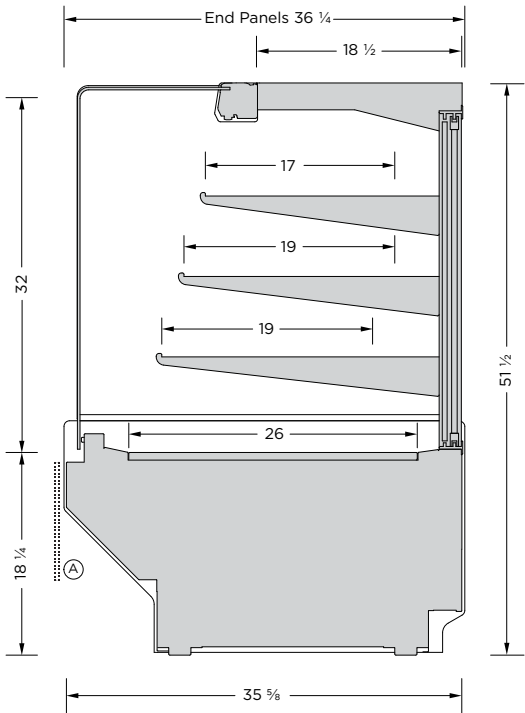



SQUARE FRONT GLASS HIGH-CAPACITY MEDIUM DEPTH DISPLAY WITH VERTICAL BACK

BFS - BAKERY FULL-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BFSH-38SQ-M	38 ¼"	115	1.9	NEMA 5-15P	2440	25F
BFSH-48SQ-M	47 ⅞"	115	2.1	NEMA 5-15P	2920	25F
BFSH-57SQ-M	57 ⅜"	115	2.8	NEMA 5-15P	3370	25F
BFSH-76SQ-M	76 ½"	115	3.4	NEMA 5-15P	4320	25F
BFSH-96SQ-M	95 ⅝"	115	3.9	NEMA 5-15P	5320	25F

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-17" and 2-19" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Square front glass.

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Mirroring added to the rear sliding doors	
Ambient display	
Front metal clip-on signage strip	
- Add metal price tag mould	
- Add plastic sign stripping	
Additional tempered glass shelf with integrated LED lighting	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty



SQUARE FRONT GLASS HIGH-CAPACITY SMALL DEPTH DISPLAY WITH VERTICAL BACK

BFS - BAKERY FULL-SERVICE DISPLAY

 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

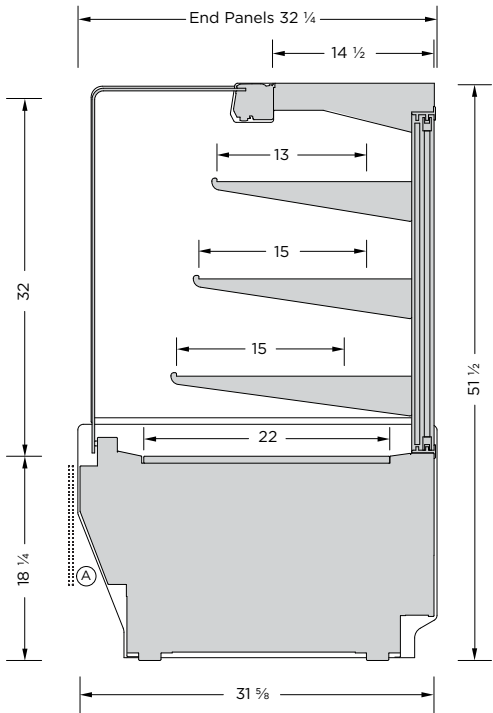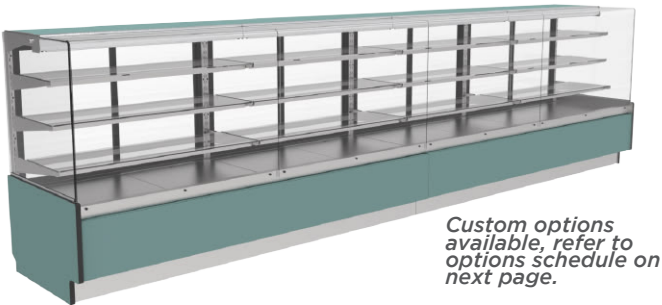


MODEL	LENGTH
BFSH-38SQ-S	38 1/4"
BFSH-48SQ-S	47 7/8"
BFSH-57SQ-S	57 3/8"
BFSH-76SQ-S	76 1/2"
BFSH-96SQ-S	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Remote refrigeration option only for this display profile.
- Proprietary **Cold & Slow™** refrigeration design: high volume low velocity cooling.
- A non-refrigerated display option is available.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-13" and 2-15" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Rear sliding doors with sealed thermal glass.
- Front base décor panel options (A) provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



SQUARE FRONT GLASS HIGH-CAPACITY SMALL DEPTH DISPLAY WITH VERTICAL BACK

BFS - BAKERY FULL-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BFSH-38SQ-S	38 ¼"	115	1.9	NEMA 5-15P	2440	25F
BFSH-48SQ-S	47 ⅞"	115	2.1	NEMA 5-15P	2920	25F
BFSH-57SQ-S	57 ⅞"	115	2.8	NEMA 5-15P	3370	25F
BFSH-76SQ-S	76 ½"	115	3.4	NEMA 5-15P	4320	25F
BFSH-96SQ-S	95 ⅝"	115	3.9	NEMA 5-15P	5320	25F

STANDARD FEATURES:

- Remote refrigeration.
- Small display depth 31 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-13" and 2-15" adjustable tempered glass shelves.
- Hydraulic lift-up front glass hardware.
- Square front glass.

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	


MISCELLANEOUS

Mirroring added to the rear sliding doors	
Ambient display	
Front metal clip-on signage strip	
- Add metal price tag mould	
- Add plastic sign stripping	
Additional tempered glass shelf with integrated LED lighting	

ADDITIONAL FEATURES:


- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

BSS - BAKERY SELF-SERVICE DISPLAY

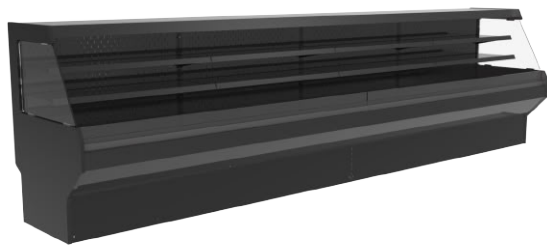


Matches Flat Front Glass Service Display Profile

Page 34

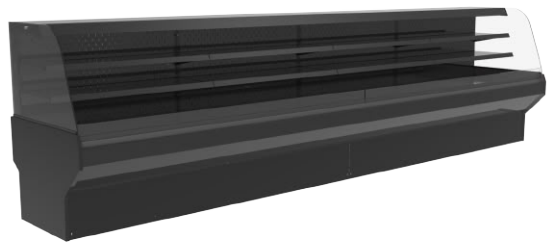


Matches Double Curve Front Glass Service Display Profile

Page 36

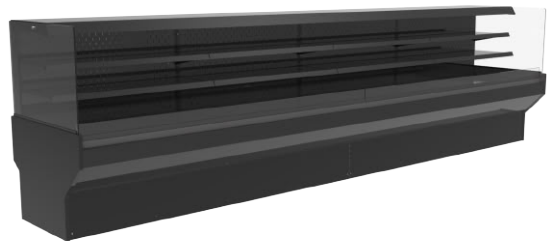


Matches Square Front Glass Service Display Profile

Page 38

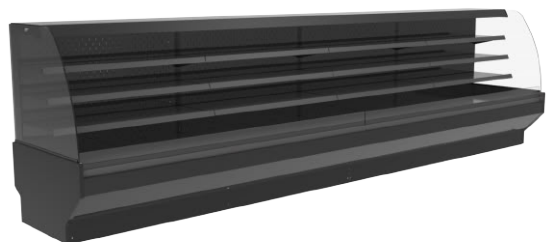

Matches High-Capacity Double Curve Front Glass Medium Depth Service Display Profile

Page 40

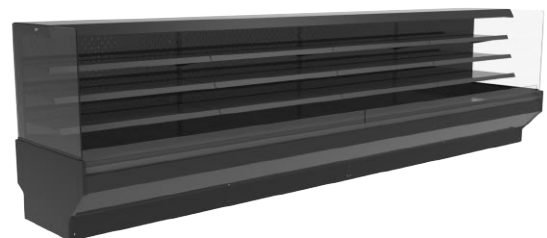

Matches High-Capacity Square Front Glass Medium Depth Service Display Profile


Page 42





BSS - BAKERY SELF-SERVICE DISPLAY

Matches Square High-Capacity Front Glass Small
Depth Service Display Profile



Page 44

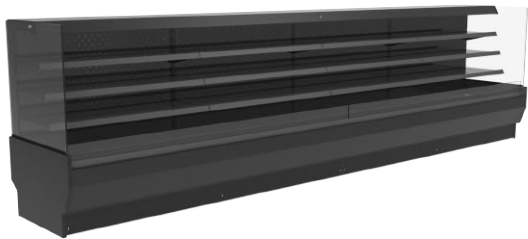

BSS - FEATURES TO MAKE YOUR SHOWCASE WHAT YOU NEED IT TO BE

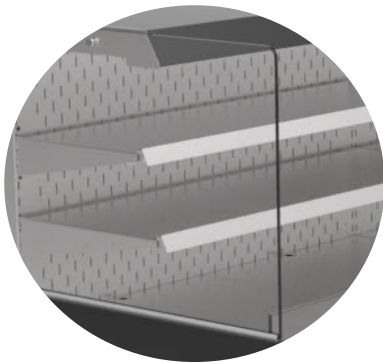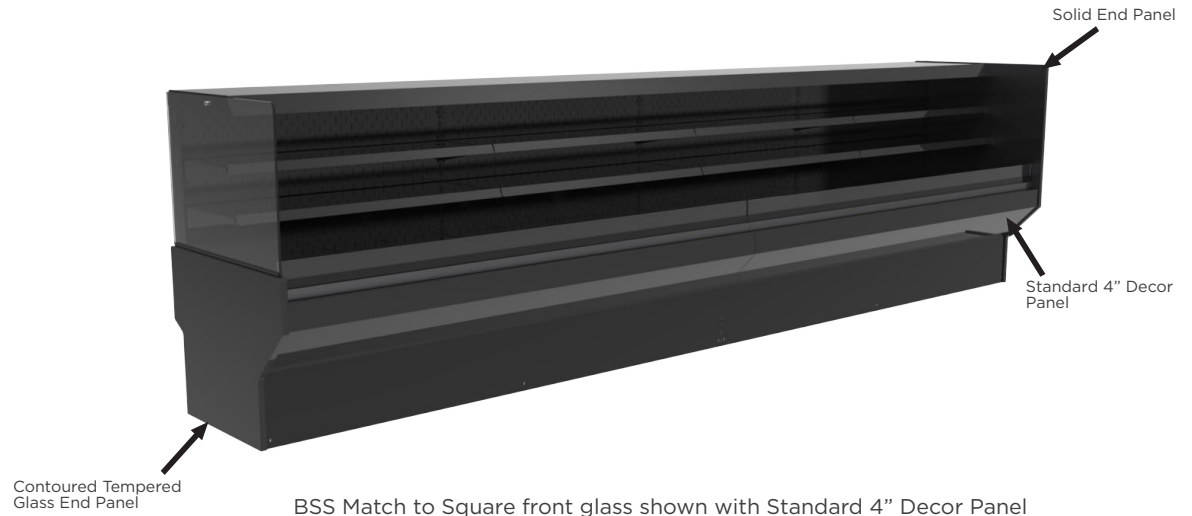

Metal Shelves

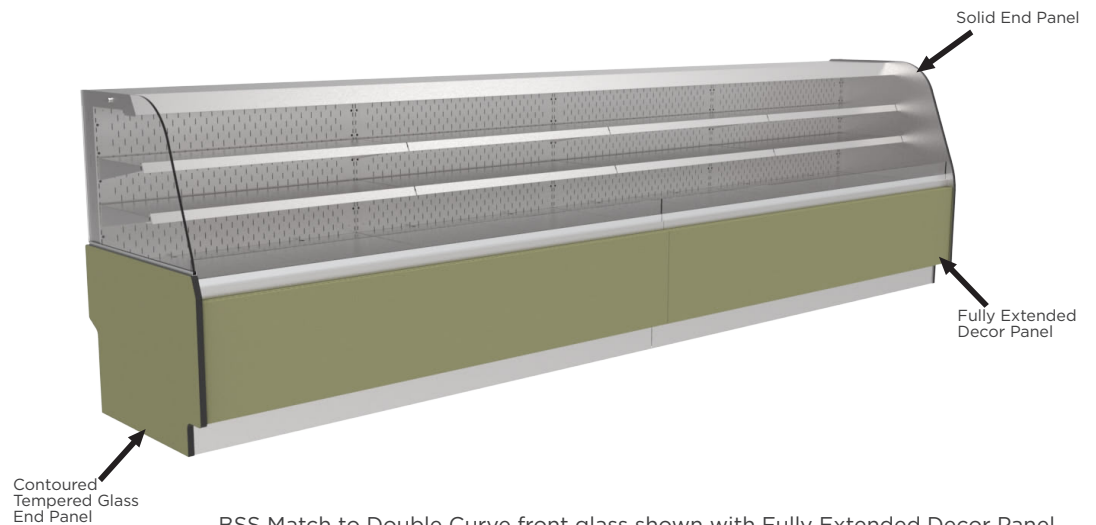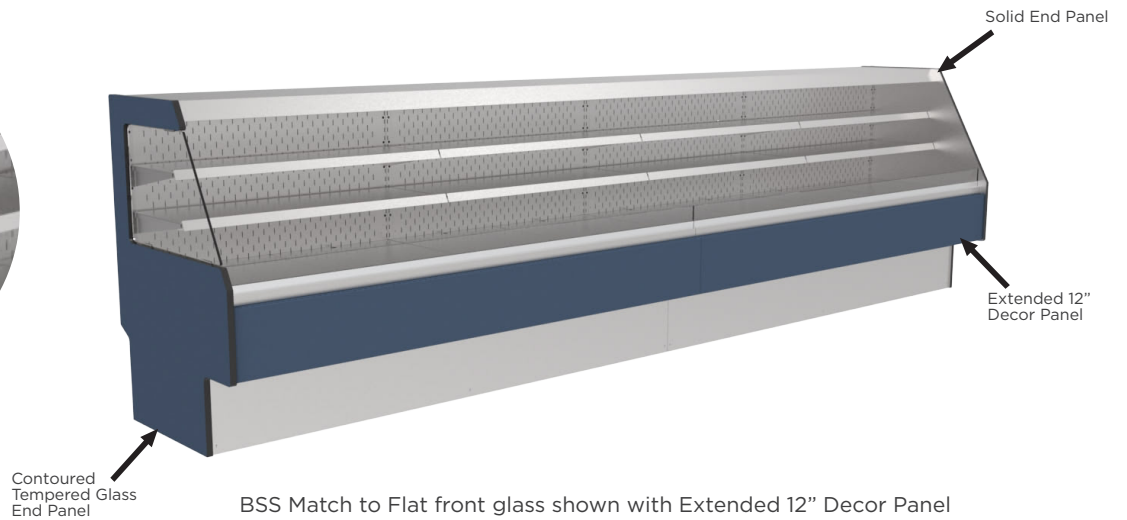


MATCHES FLAT FRONT GLASS SERVICE DISPLAY PROFILE

BSS - BAKERY SELF-SERVICE DISPLAY

 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

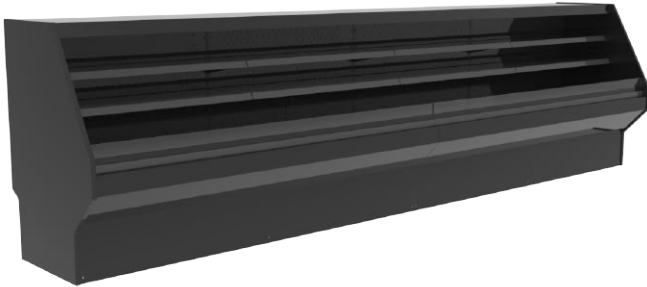

Custom options available, refer to options schedule on next page.


MODEL	LENGTH
BSSV-38FL-M	38 ¼"
BSSV-48FL-M	47 ⅞"
BSSV-57FL-M	57 ⅜"
BSSV-57FL-M	76 ½"
BSSV-96FL-M	95 ⅝"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Designed to match BFS-FL display height and depth.
- Three display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-14" and 1-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Front base décor panel options (A) provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.

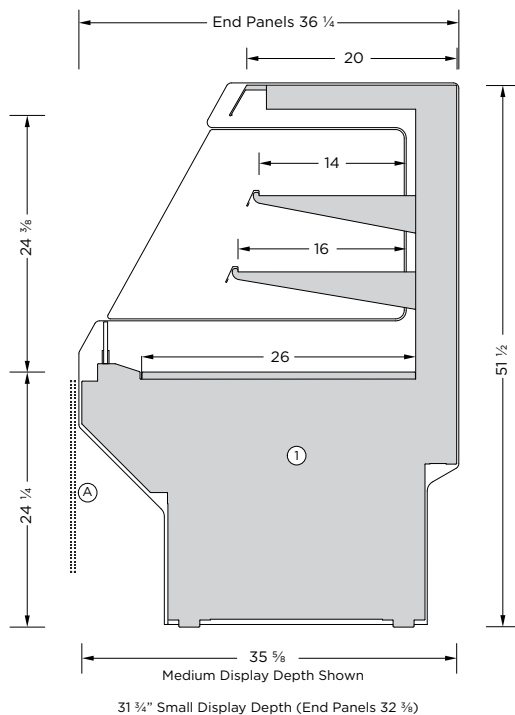



MATCHES FLAT FRONT GLASS SERVICE DISPLAY PROFILE BSS - BAKERY SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BSSV-38FL-M	38 ¼"	115	1.6	NEMA 5-15P	3575	20F
BSSV-48FL-M	47 ⅞"	115	1.8	NEMA 5-15P	4340	20F
BSSV-57FL-M	57 ⅜"	115	2.5	NEMA 5-15P	5055	20F
BSSV-57FL-M	76 ½"	115	2.8	NEMA 5-15P	6630	20F
BSSV-96FL-M	95 ⅝"	115	3.3	NEMA 5-15P	8160	20F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-14" and 1-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Flat front glass profile.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Small display depth 31 ¾"	
Large display depth 43 ¼"	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:


- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty

MATCHES DOUBLE CURVE FRONT GLASS SERVICE DISPLAY PROFILE BSS - BAKERY SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

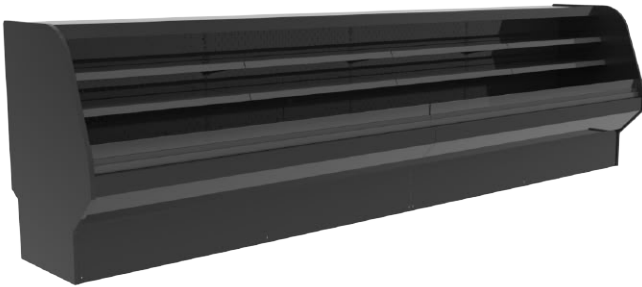

Custom options available, refer to options schedule on next page.

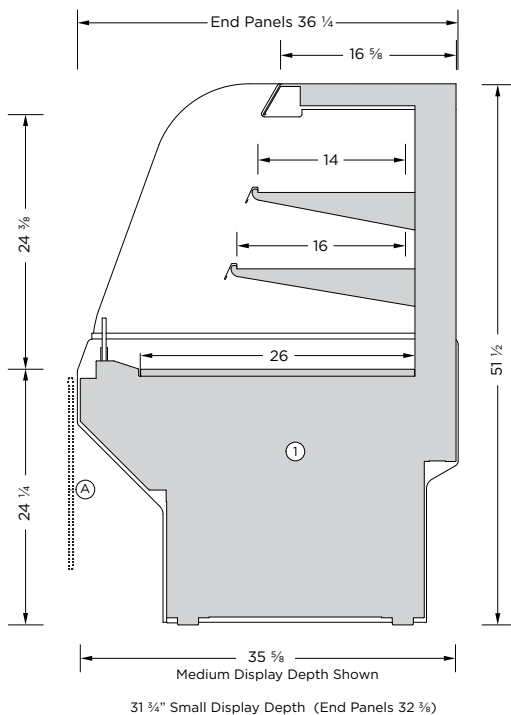


MODEL	LENGTH
BSSV-38DC-M	38 1/4"
BSSV-48DC-M	47 7/8"
BSSV-57DC-M	57 3/8"
BSSV-76DC-M	76 1/2"
BSSV-96DC-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Designed to match BFS-DC display height and depth.
- Three display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-14" and 1-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Front base décor panel options (A) provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



MATCHES DOUBLE CURVE FRONT GLASS SERVICE DISPLAY PROFILE BSS - BAKERY SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BSSV-38DC-M	38 ¼"	115	1.6	NEMA 5-15P	3575	20F
BSSV-48DC-M	47 ⅞"	115	1.8	NEMA 5-15P	4340	20F
BSSV-57DC-M	57 ⅜"	115	2.5	NEMA 5-15P	5055	20F
BSSV-76DC-M	76 ½"	115	2.8	NEMA 5-15P	6630	20F
BSSV-96DC-M	95 ⅝"	115	3.3	NEMA 5-15P	8160	20F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-14" and 1-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Double Curve glass profile.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Small display depth 31 ¾"	
Large display depth 43 ¼"	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty



MATCHES SQUARE FRONT GLASS SERVICE DISPLAY PROFILE

BSS - BAKERY SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

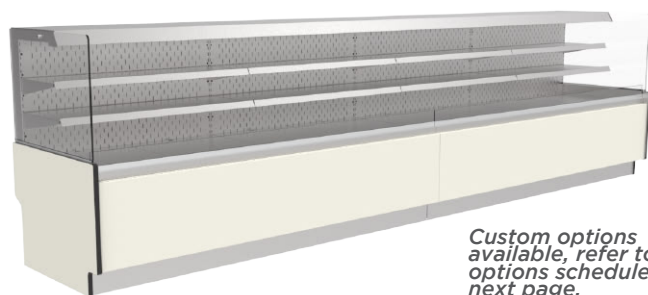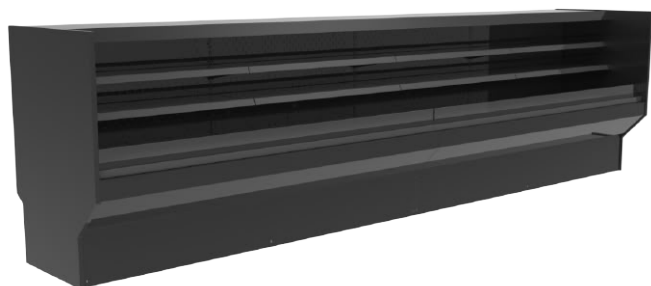

Custom options available, refer to options schedule on next page.

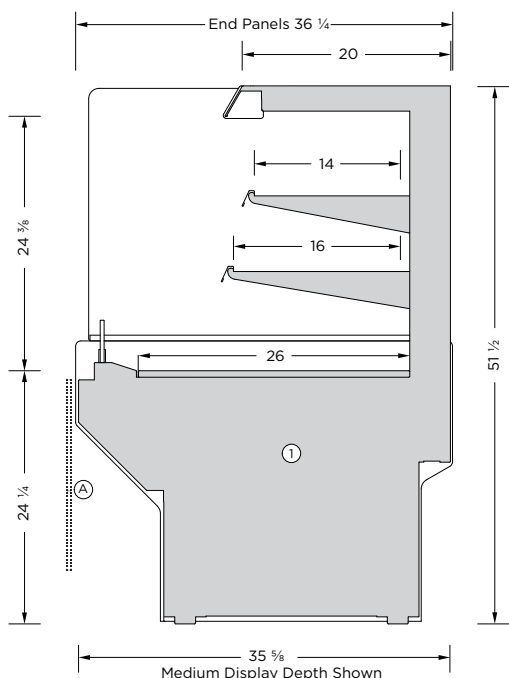


MODEL	LENGTH
BSSV-38SQ-M	38 $\frac{1}{4}$ "
BSSV-48SQ-M	47 $\frac{7}{8}$ "
BSSV-57SQ-M	57 $\frac{3}{8}$ "
BSSV-76SQ-M	76 $\frac{1}{2}$ "
BSSV-96SQ-M	95 $\frac{5}{8}$ "

Length does not include end panels. Add 1" per panel.

FEATURES:

- Designed to match BFS-SQ display height and depth.
- Two display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-14" and 1-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Front base décor panel options Ⓐ provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



MATCHES SQUARE FRONT GLASS SERVICE DISPLAY PROFILE BSS - BAKERY SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BSSV-38SQ-M	38 ¼"	115	1.6	NEMA 5-15P	3575	20F
BSSV-48SQ-M	47 ⅞"	115	1.8	NEMA 5-15P	4340	20F
BSSV-57SQ-M	57 ⅜"	115	2.5	NEMA 5-15P	5055	20F
BSSV-76SQ-M	76 ½"	115	2.8	NEMA 5-15P	6630	20F
BSSV-96SQ-M	95 ⅝"	115	3.3	NEMA 5-15P	8160	20F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-14" and 1-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Square glass profile.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Small display depth 31 ¾"	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:




- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty

MATCHES HIGH-CAPACITY DOUBLE CURVE FRONT GLASS MEDIUM DEPTH SERVICE DISPLAY PROFILE

BSS - BAKERY SELF-SERVICE DISPLAY

 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

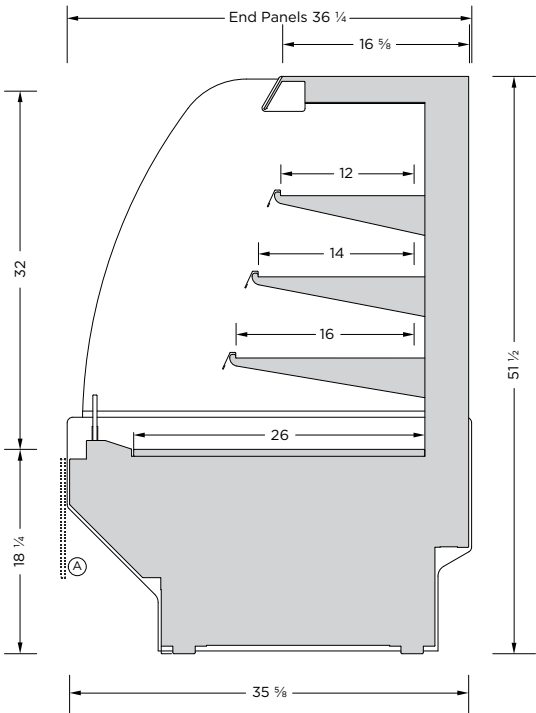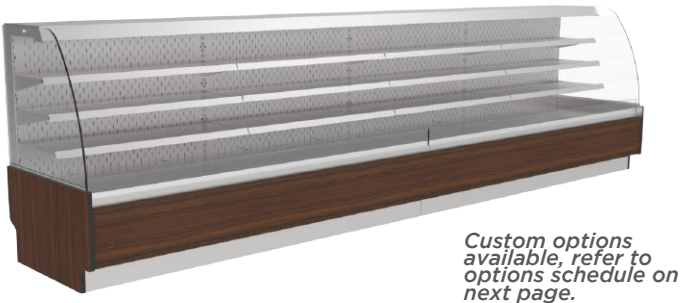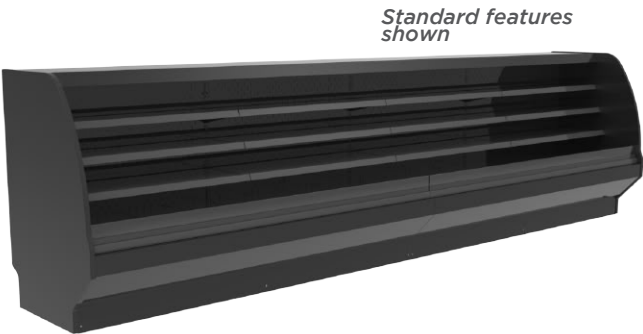


MODEL	LENGTH
BSSH-38DC-M	38 1/4"
BSSH-48DC-M	47 7/8"
BSSH-57DC-M	57 3/8"
BSSH-76DC-M	76 1/2"
BSSH-96DC-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Designed to match BFSH-DC display height and depth.
- Remote refrigeration option only for this display profile
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-12", 1-14" and 1-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Front base décor panel options  provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



MATCHES HIGH- CAPACITY DOUBLE CURVE FRONT GLASS MEDIUM DEPTH SERVICE DISPLAY PROFILE

BSS - BAKERY SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BSSH-38DC-M	38 ¼"	115	1.6	NEMA 5-15P	3575	20F
BSSH-48DC-M	47 ⅞"	115	1.8	NEMA 5-15P	4340	20F
BSSH-57DC-M	57 ⅞"	115	2.5	NEMA 5-15P	5055	20F
BSSH-76DC-M	76 ½"	115	2.8	NEMA 5-15P	6630	20F
BSSH-96DC-M	95 ⅞"	115	3.3	NEMA 5-15P	8160	20F

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-12", 1-14" and 1-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Double Curve glass profile.

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty



MATCHES HIGH-CAPACITY SQUARE FRONT GLASS MEDIUM DEPTH SERVICE DISPLAY PROFILE

BSS - BAKERY SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

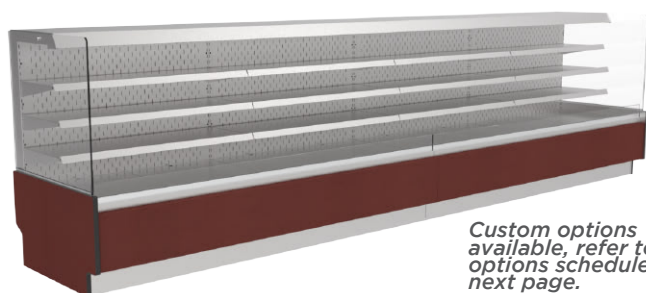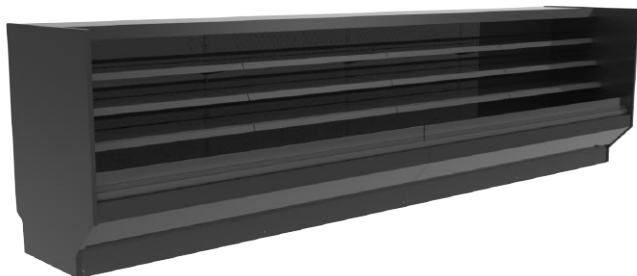

Custom options available, refer to options schedule on next page.

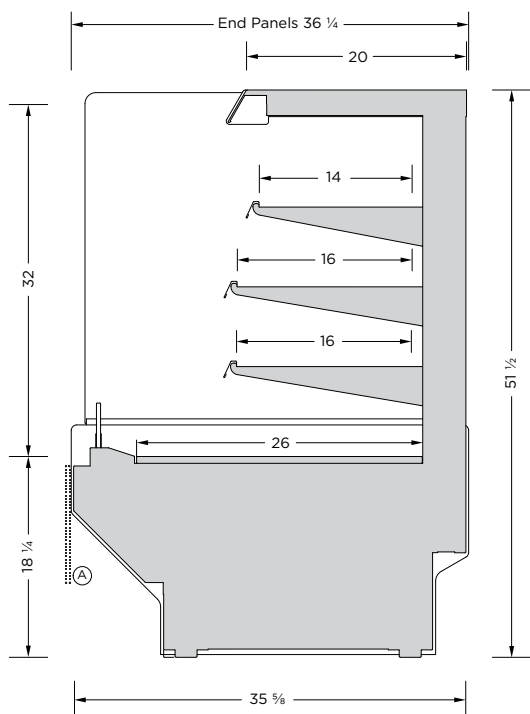


MODEL	LENGTH
BSSH-38SQ-M	38 1/4"
BSSH-48SQ-M	47 7/8"
BSSH-57SQ-M	57 3/8"
BSSH-76SQ-M	76 1/2"
BSSH-96SQ-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Designed to match BSSH-SQ display height and depth.
- Remote refrigeration option only for this display profile
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-14" and 2-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Front base décor panel options  provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



MATCHES HIGH-CAPACITY SQUARE FRONT GLASS MEDIUM DEPTH SERVICE DISPLAY PROFILE

BSS - BAKERY SELF-SERVICE DISPLAY

REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BSSH-38SQ-M	38 ¼"	115	1.6	NEMA 5-15P	3575	20F
BSSH-48SQ-M	47 ⅞"	115	1.8	NEMA 5-15P	4340	20F
BSSH-57SQ-M	57 ⅞"	115	2.5	NEMA 5-15P	5055	20F
BSSH-76SQ-M	76 ½"	115	2.8	NEMA 5-15P	6630	20F
BSSH-96SQ-M	95 ⅝"	115	3.3	NEMA 5-15P	8160	20F

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-14" and 2-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Square glass profile.

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1- year parts and labor warranty


MATCHES HIGH CAPACITY SQUARE FRONT GLASS SMALL DEPTH SERVICE DISPLAY PROFILE

BSS - BAKERY SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features
shown

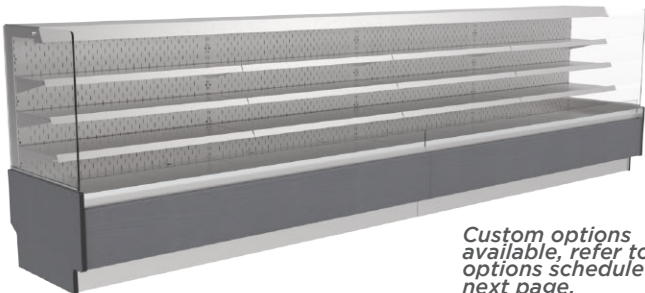

Custom options
available, refer to
options schedule on
next page.

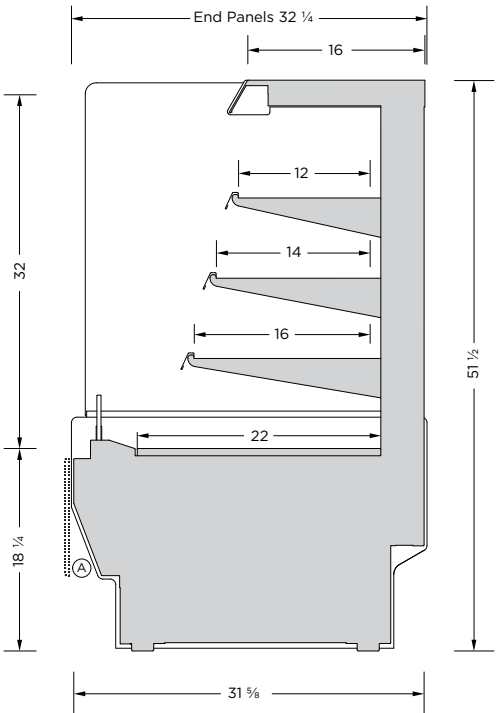


MODEL	LENGTH
BSSH-38SQ-S	38 1/4"
BSSH-48SQ-S	47 7/8"
BSSH-57SQ-S	57 3/8"
BSSH-76SQ-S	76 1/2"
BSSH-96SQ-S	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Designed to match BFSH-SQ display height and depth.
- Remote refrigeration option only for this display profile
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-12", 1-14" and 1-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Front base décor panel options  provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



MATCHES HIGH-CAPACITY SQUARE FRONT GLASS SMALL DEPTH SERVICE DISPLAY PROFILE

BSS - BAKERY SELF-SERVICE DISPLAY

REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BSSH-38SQ-S	38 ¼"	115	1.6	NEMA 5-15P	3575	20F
BSSH-48SQ-S	47 ⅞"	115	1.8	NEMA 5-15P	4340	20F
BSSH-57SQ-S	57 ⅞"	115	2.5	NEMA 5-15P	5055	20F
BSSH-76SQ-S	76 ½"	115	2.8	NEMA 5-15P	6630	20F
BSSH-96SQ-S	95 ⅝"	115	3.3	NEMA 5-15P	8160	20F

STANDARD FEATURES:

- Remote refrigeration.
- Small display depth 31 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-12", 1-14" and 1-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Square glass profile.

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Small display depth 31 ¾"	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty

BSD - BAKERY SINGLE LEVEL SELF-SERVICE DISPLAY

24” Front Height with a 36” Rear Height



Page 48



24” Front Height with a 42” or 48” Rear Height



Page 50



18” Front Height with a 30” Rear Height



Page 52




18” Front Height with a 36” or 42” Rear Height




Page 54



BSD - FEATURES TO MAKE YOUR SHOWCASE WHAT YOU NEED IT TO BE

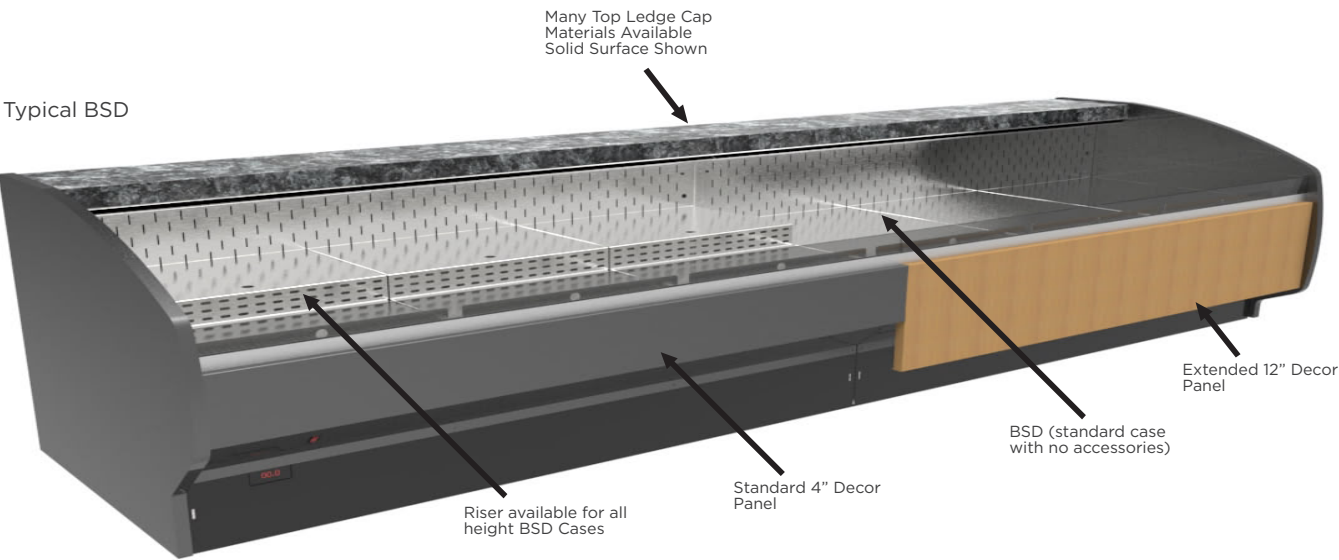

30" & 36" High BSD shown with Solid Surface ledge

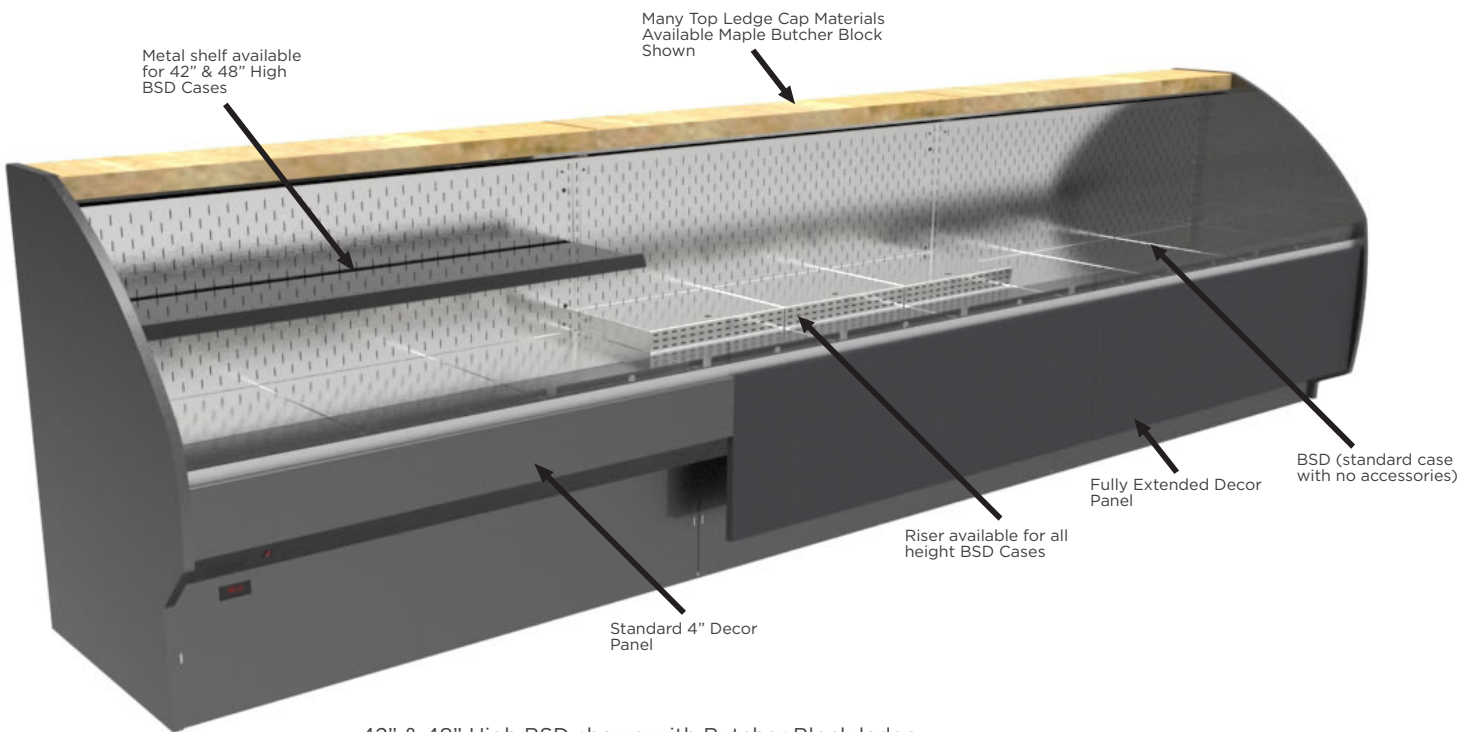

42" & 48" High BSD shown with Butcher Block ledge

24" FRONT HEIGHT WITH A 36" REAR HEIGHT

BSD - BAKERY SINGLE LEVEL SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown



Custom options available, refer to options schedule on next page.

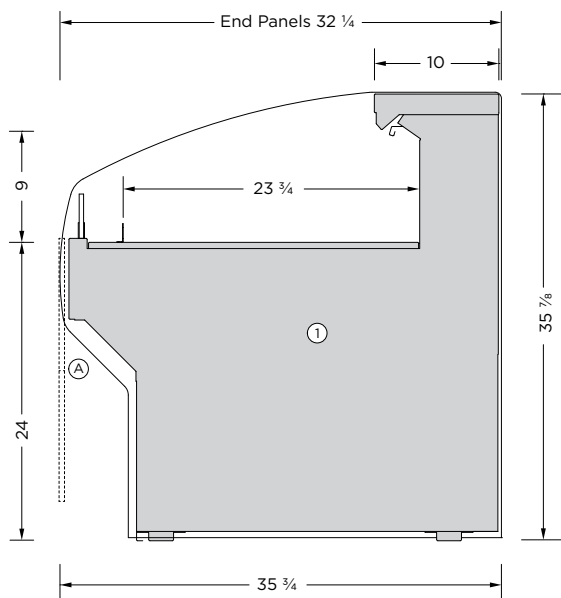

Medium Case Depth Shown
31 3/4 Small Case Depth
43 3/4 Large Case Depth

MODEL	LENGTH
BSDN-3636-M	36 1/4"
BSDN-4836-M	48 1/4"
BSDN-6036-M	60 3/8"
BSDN-7236-M	72 1/2"
BSDN-9636-M	96 1/2"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Three display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display.
- The LED lighting is available in various light intensities/spectrums.
- 1 1/2" front product stop integrated to the base inlays.
- Front base décor panel options Ⓐ provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



24" FRONT HEIGHT WITH A 36" REAR HEIGHT

BSD - BAKERY SINGLE LEVEL SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BSDN-3636-M	36 ¼"	115	0.7	NEMA 5-15P	2719	20F
BSDN-4836-M	48 ¼"	115	0.9	NEMA 5-15P	3619	20F
BSDN-6036-M	60 ¾"	115	0.9	NEMA 5-15P	4528	20F
BSDN-7236-M	72 ½"	115	0.9	NEMA 5-15P	5438	20F
BSDN-9636-M	96 ½"	115	1.1	NEMA 5-15P	7238	20F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Small display depth 31 ¾"	
Large display depth 43 ¼"	
Top mounted roll-down thermal night curtain	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

24" FRONT HEIGHT WITH A 42" & 48" REAR HEIGHT

BSD - BAKERY SINGLE LEVEL SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown



Custom options available, refer to options schedule on next page.

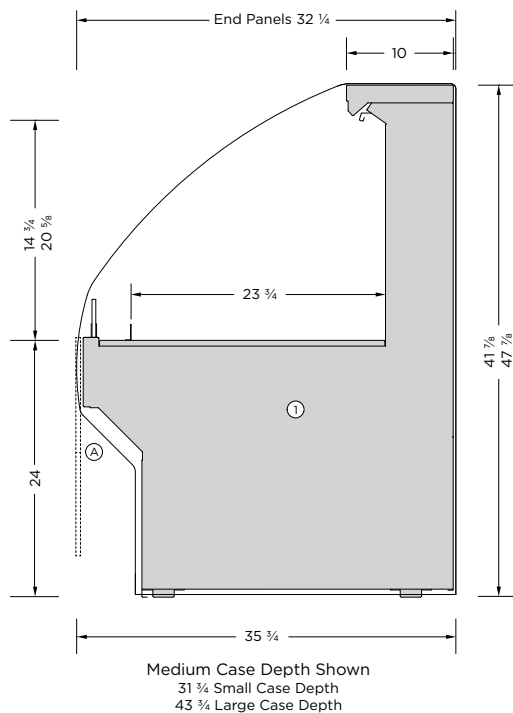

MODEL	LENGTH
BSDN-3642-M	36 1/4"
BSDN-4842-M	48 1/4"
BSDN-6042-M	60 3/8"
BSDN-7242-M	72 1/2"
BSDN-9642-M	96 1/2"
BSDN-3648-M	36 1/4"
BSDN-4848-M	48 1/4"
BSDN-6048-M	60 3/8"
BSDN-7248-M	72 1/2"
BSDN-9248-M	96 1/2"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Three display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display.
- The LED lighting is available in various light intensities/spectrums.
- 1 1/2" front product stop integrated to the base inlays.
- Front base décor panel options Ⓐ provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



24" FRONT HEIGHT WITH A 42" & 48" REAR HEIGHT

BSD - BAKERY SINGLE LEVEL SELF-SERVICE DISPLAY

REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BSDN-3642-M	36 ¼"	115	1.2	NEMA 5-15P	2794	20F
BSDN-3648-M					2870	
BSDN-4842-M	48 ¼"	115	1.4	NEMA 5-15P	3719	20F
BSDN-4848-M					3820	
BSDN-6042-M	60 ¾"	115	1.4	NEMA 5-15P	4654	20F
BSDN-6048-M					4780	
BSDN-7242-M	72 ½"	115	1.4	NEMA 5-15P	5589	20F
BSDN-7248-M					5740	
BSDN-9642-M	96 ½"	115	1.6	NEMA 5-15P	7439	20F
BSDN-9248-M					7640	

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

END PANELS	
The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS	
Small display depth 31 ¾"	
Large display depth 43 ¼"	
Top mounted roll-down thermal night curtain	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
4"H x 6 ½"D 3 Tier stepped riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	


18" FRONT HEIGHT WITH A 30" REAR HEIGHT

BSD - BAKERY SINGLE LEVEL SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

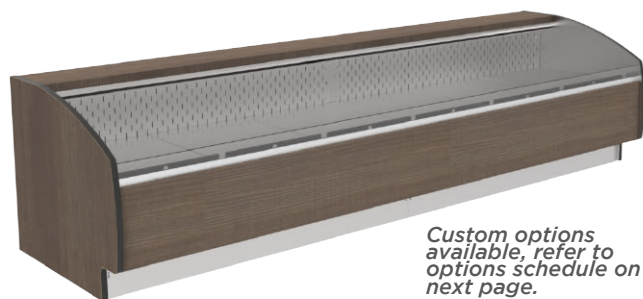

Custom options available, refer to options schedule on next page.

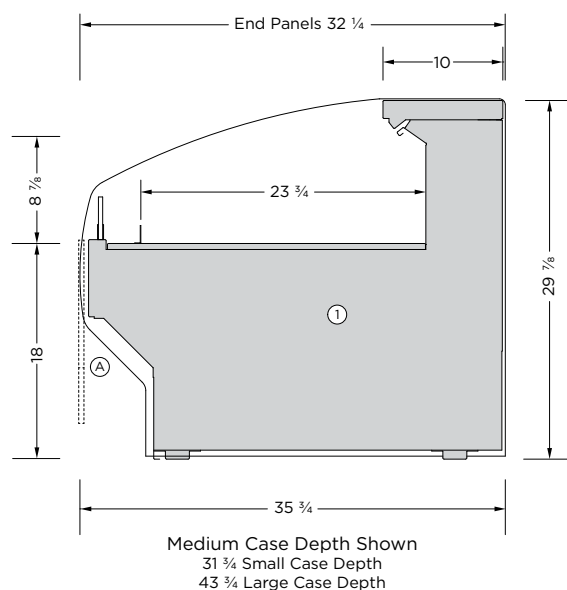

MODEL	LENGTH
BSDL-3630-M	36 1/4"
BSDL-4830-M	48 1/4"
BSDL-6030-M	60 3/8"
BDSL-7230-M	72 1/2"
BSDL-9630-M	96 1/2"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Remote refrigeration option only for this display profile.
- Three display depths available, refer to the dimensioned illustration. ①
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display.
- The LED lighting is available in various light intensities/spectrums.
- 1 1/2" front product stop integrated to the base inlays.
- Front base décor panel options Ⓐ provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



18" FRONT HEIGHT WITH A 30" REAR HEIGHT

BSD - BAKERY SINGLE LEVEL SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BSDL-3630-M	36 ¼"	115	0.7	NEMA 5-15P	2719	20F
BSDL-4830-M	48 ¼"	115	0.9	NEMA 5-15P	3619	20F
BSDL-6030-M	60 ¾"	115	0.9	NEMA 5-15P	4528	20F
BDL-7230-M	72 ½"	115	0.9	NEMA 5-15P	5438	20F
BSDL-9630-M	96 ½"	115	1.1	NEMA 5-15P	7238	20F

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area.

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Small display depth 31 ¾"	
Large display depth 43 ¼"	
Top mounted roll-down thermal night curtain	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty


18" FRONT HEIGHT WITH A 36" & 42" REAR HEIGHT

BSD - BAKERY SINGLE LEVEL SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

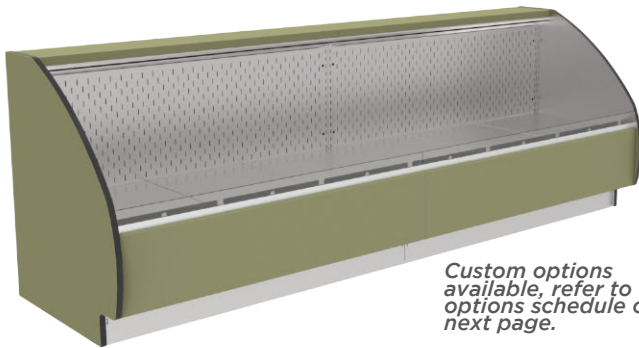

Custom options available, refer to options schedule on next page.

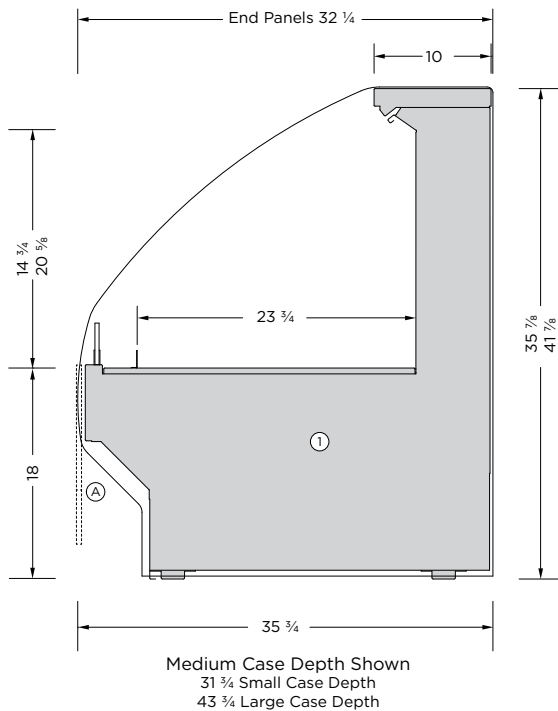

MODEL	LENGTH
BSDL-3636-M	36 1/4"
BSDL-4836-M	48 1/4"
BSDL-6036-M	60 3/8"
BSDL-7236-M	72 1/2"
BSDL-9636-M	96 1/2"
BSDL-3642-M	36 1/4"
BSDL-4842-M	48 1/4"
BSDL-6042-M	60 3/8"
BSDL-7242-M	72 1/2"
BSDL-9242-M	96 1/2"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Remote refrigeration option only for this display profile.
- Three display depths available, refer to the dimensioned illustration. ①
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display.
- The LED lighting is available in various light intensities/spectrums.
- 1 1/2" front product stop integrated to the base inlays.
- Front base décor panel options ② provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



18" FRONT HEIGHT WITH A 36" & 42" REAR HEIGHT

BSD - BAKERY SINGLE LEVEL SELF-SERVICE DISPLAY

REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BSDL-3636-M	36 ¼"	115	1.2	NEMA 5-15P	2794	20F
BSDL-3642-M					2870	
BSDL-4836-M	48 ¼"	115	1.4	NEMA 5-15P	3719	20F
BSDL-4842-M					3820	
BSDL-6036-M	60 ¾"	115	1.4	NEMA 5-15P	4654	20F
BSDL-6042-M					4780	
BSDL-7236-M	72 ½"	115	1.4	NEMA 5-15P	5589	20F
BSDL-7242-M					5740	
BSDL-9636-M	96 ½"	115	1.6	NEMA 5-15P	7439	20F
BSDL-9242-M					7640	

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

END PANELS



The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Small display depth 31 ¾"	
Large display depth 43 ¼"	
Top mounted roll-down thermal night curtain	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
4"H x 6 ½"D 3 Tier stepped riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	

REFRIGERATED DISPLAY ACCESSORIES



2 1/2" X 13" SINGLE STEP RISER

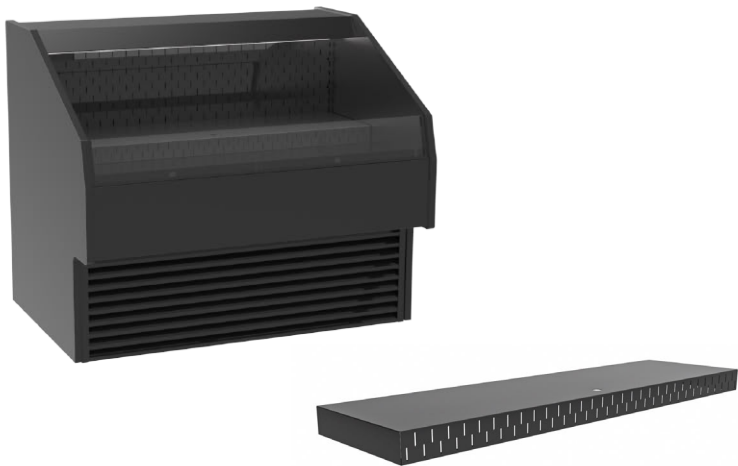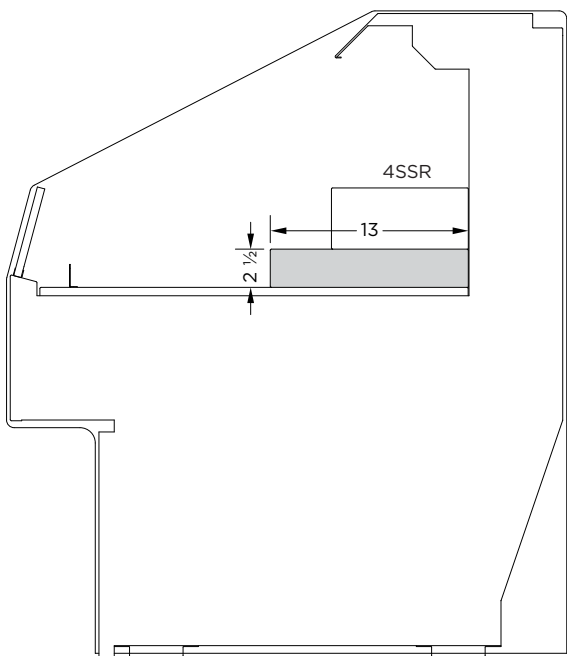

DISPLAY WIDTH	PART #	QTY
24"	2SSR-24-P*, S*	1
38"	2SSR-38-P, S	1
48"	2SSR-48-P, S	1
57"	2SSR-57-P, S	1
76"	2SSR-38-P, S	2
96"	2SSR-48-P, S	2

P = Painted powdercoat finish
S = Brushed stainless steel

4" X 9" SINGLE STEP RISER

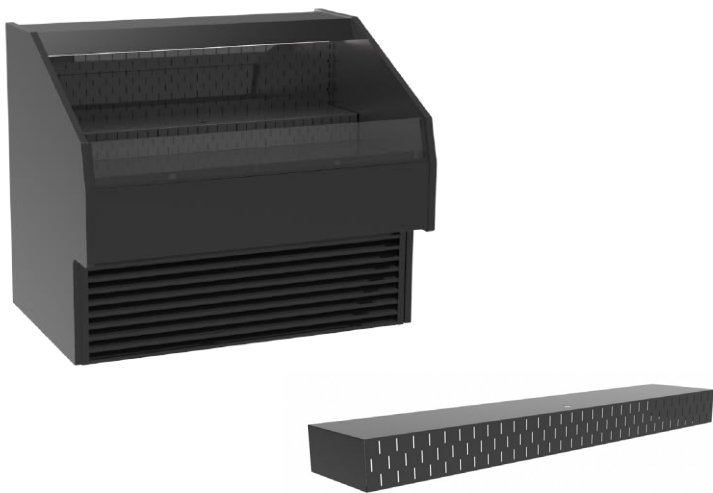
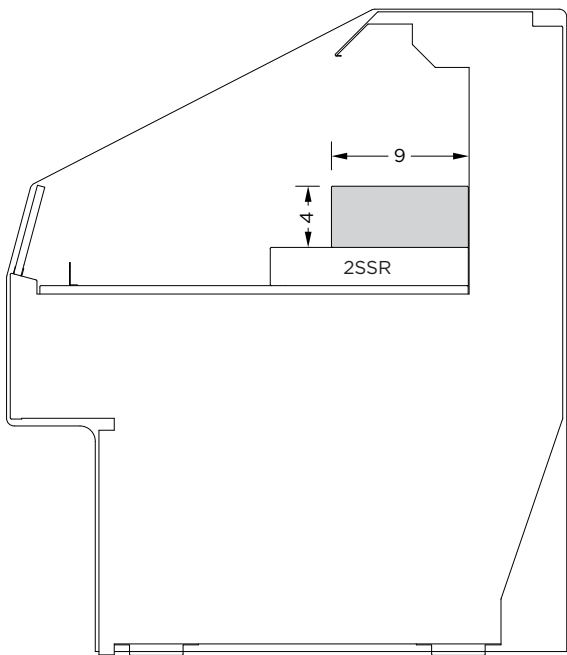


DISPLAY WIDTH	PART #	QTY
24"	4SSR-24-P*, S*	1
38"	4SSR-38-P, S	1
48"	4SSR-48-P, S	1
57"	4SSR-57-P, S	1
76"	4SSR-38-P, S	2
96"	4SSR-48-P, S	2

P = Painted powdercoat finish
S = Brushed stainless steel

REFRIGERATED DISPLAY ACCESSORIES


THREE TIER STEPPED RISER

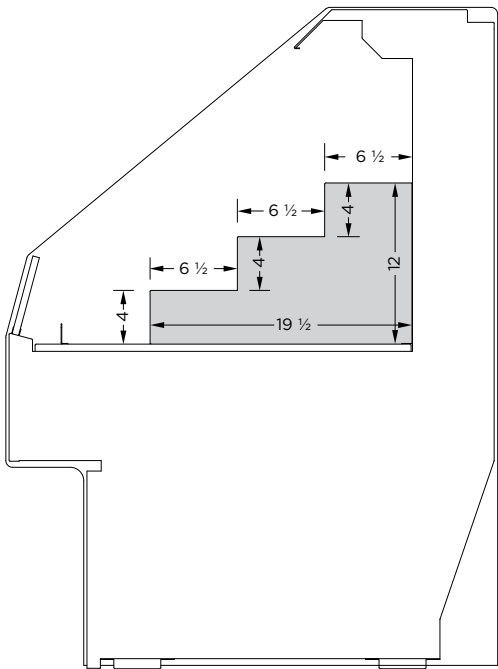

DISPLAY WIDTH	PART #	QTY
24"	3TSR-24-P*, S*	1
38"	3TSR-19-P, S	2
48"	3TSR-24-P, S	2
57"	3TSR-19-P, S	3
76"	3TSR-19-P, S	4
96"	3TSR-24-P, S	4

P = Painted powdercoat finish
S = Brushed stainless steel

FOUR TIER STEPPED RISER

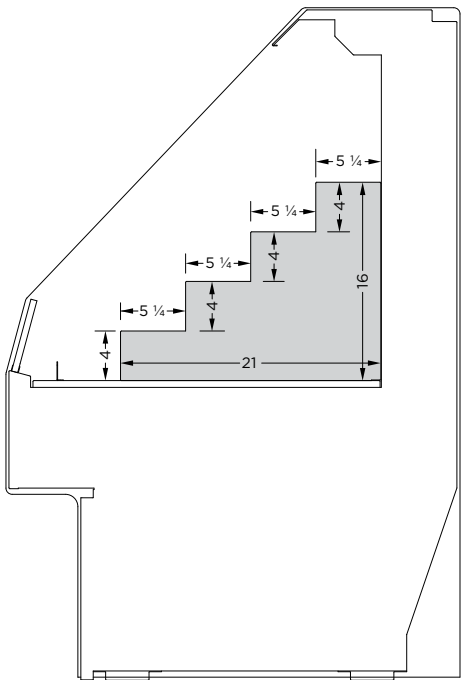


DISPLAY WIDTH	PART #	QTY
24"	4TSR-24-P*, S*	1
38"	4TSR-19-P, S	2
48"	4TSR-24-P, S	2
57"	4TSR-19-P, S	3
76"	4TSR-19-P, S	4
96"	4TSR-24-P, S	4

P = Painted powdercoat finish
S = Brushed stainless steel

REFRIGERATED DISPLAY ACCESSORIES


CLIP-IN ANGLED BASE INLAY

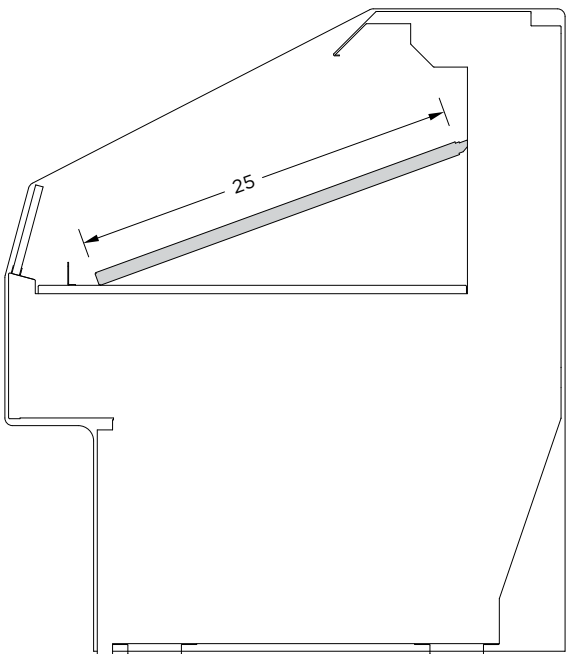

DISPLAY WIDTH	PART #	QTY
24"	ABI-24-P*, S*	1
38"	ABI-38-P, S	1
48"	ABI-48-P, S	1
57"	ABI-57-P, S	1
76"	ABI-38-P, S	2
96"	ABI-48-P, S	2

P = Painted powdercoat finish
S = Brushed stainless steel


TOP MOUNTED CLIP-ON DRY SHELF

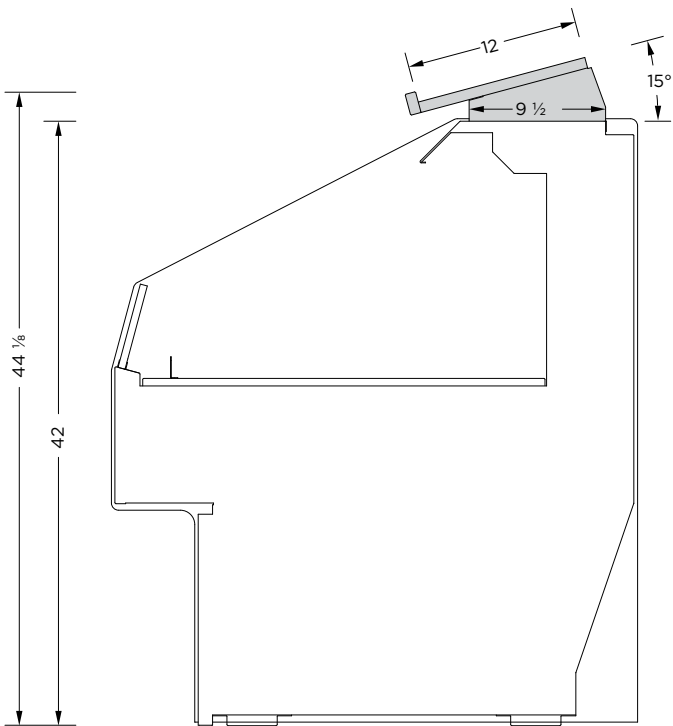

DISPLAY WIDTH	PART #
24"	CDS-24
38"	CDS-38
48"	CDS-48

REFRIGERATED DISPLAY ACCESSORIES

CLIP-ON SIGN PANEL

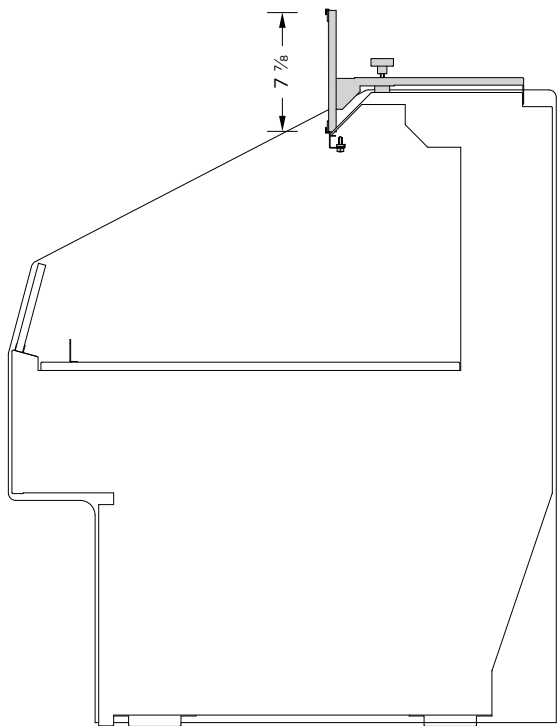



DISPLAY WIDTH	PART #
24"	CSP-24-P*, S*
38"	CSP-38-P, S
48"	CSP-48-P, S

P = Painted powdercoat finish
S = Brushed stainless steel

FEATURES:

- Plastic channels top & bottom to hold paper signs
- 3-track sign available

RAISED TOP MOUNTED CLIP-ON DRY SHELF

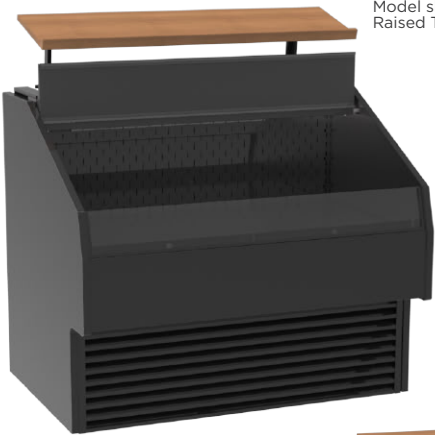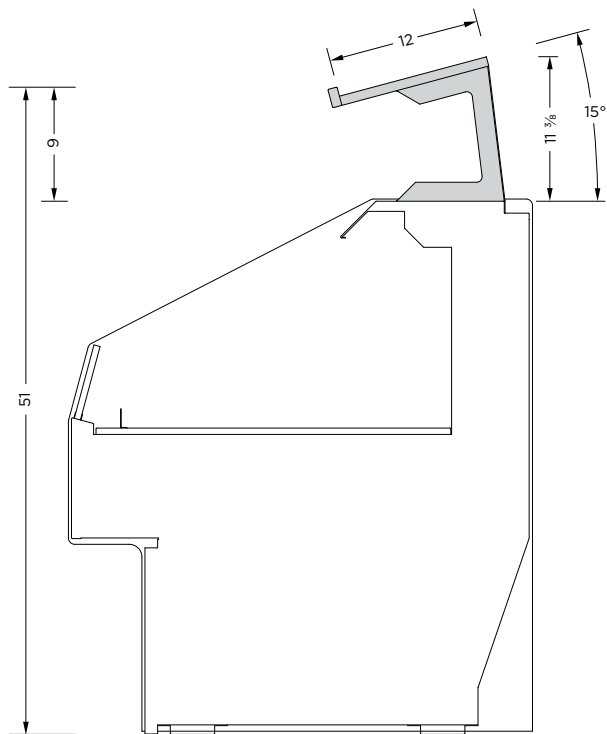

Model shown w/Clip-On Sign Panel & Raised Top Mounted Clip-On Dry Shelf




DISPLAY WIDTH	PART #
24"	RCDS-24
38"	RCDS-38
48"	RCDS-48

BOUW - BAKERY SELF-SERVICE DISPLAY & REAR PREPARTATION STATION



Rear Cake Decorating Station with Dry Base Storage

Page 62

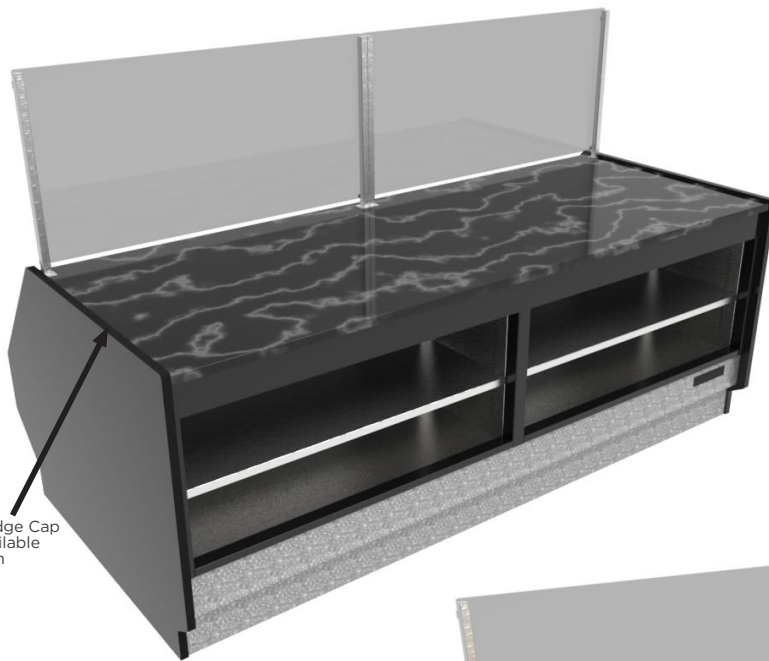

Many Top Ledge Cap
Materials Available
Marble Shown




Many Top Ledge Cap
Materials Available
Natural Wood Cutting
Board Shown

BOUW - FEATURES TO MAKE YOUR SHOWCASE WHAT YOU NEED IT TO BE


Typical BOUW



Standard Square Stainless Steel Sneezeguard Post

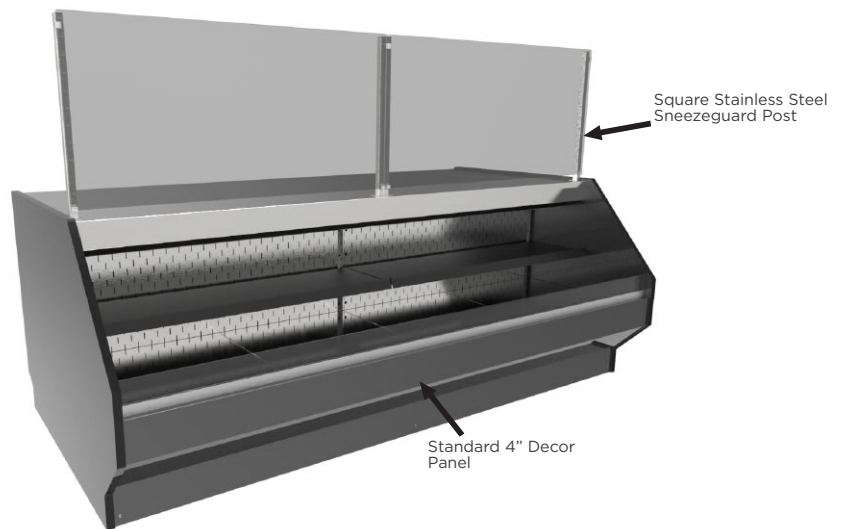

Custom Square Stainless Steel Sneezeguard Post

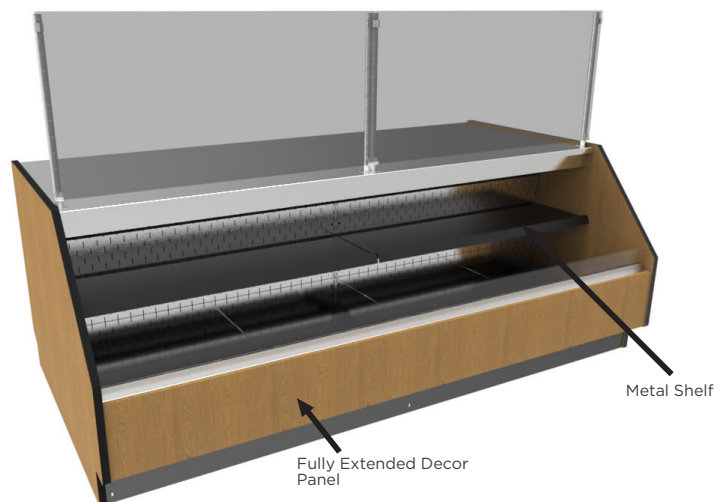


REAR CAKE DECORATING STATION WITH DRY BASE STORAGE

BOUW - BAKERY SELF-SERVICE DISPLAY & REAR PREPARATION STATION



REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

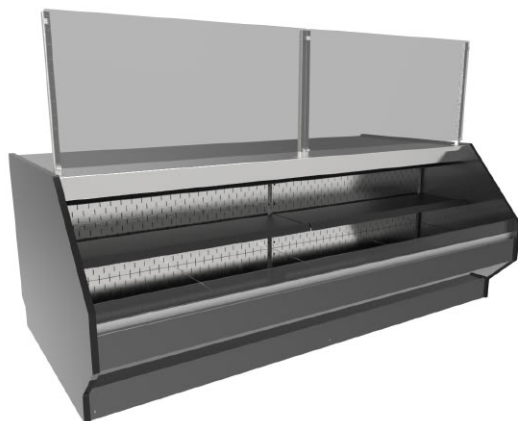


MODEL	LENGTH
BOUW-4842-MR	48 ¼"
BOUW-5742-MR	60 ⅜"
BOUW-7642-MR	72 ½"
BOUW-9642-MR	96 ½"
BOUW-4848-MS	48 ¼"
BOUW-4848-MS	60 ⅜"
BOUW-7648-MS	72 ½"
BOUW-9642-MS	96 ½"

Length does not include end panels. Add 1" per panel.

FEATURES:

- 3 interior finishes available
- Many exterior colors, patterns and wood grain finishes available
- Sneeze guard glass separating product display from food prep area. 3 options available
- Rear dry storage
- Stainless steel top surface
- Removable cutting board
- Engineered for serviceability & adjustability
- Removable base deck panels for easy cleaning and service
- LED lighting located under the top ledge
- Various LED color corrected and light intensities available
- Front base decor panel options available[Ⓐ]
- Many options available. Refer to the options schedule on next page

Note: Information and specifications may change due to engineering improvements.

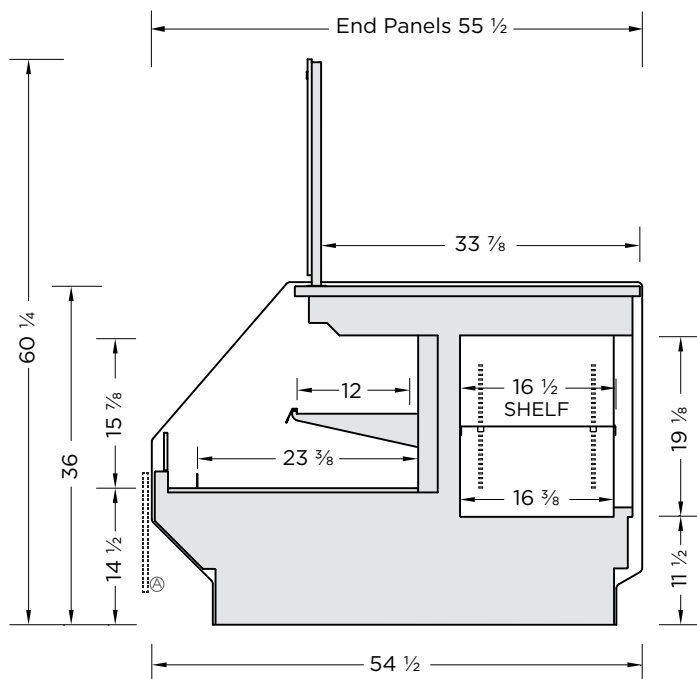

ADDITIONAL FEATURES:

- Designed to maintain product temperature of 38-41°F with an ambient atmosphere of 75°F/55% humidity
- ETL Listed and Sanitation certified to NSF 7
- 1-year Parts & Labour Warranty for Self-Contained Refrigeration
- 1-year Parts & Labour Warranty



REAR CAKE DECORATING STATION WITH DRY BASE STORAGE

BOUW - BAKERY SELF-SERVICE DISPLAY & REAR PREPARATION STATION

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BOUW-4842-MR	48 ¼"	115	1.5	NEMA 5-15P	3920	20F
BOUW-5742-MR	60 ⅜"	115	1.5	NEMA 5-15P	4560	20F
BOUW-7642-MR	72 ½"	115	2.9	NEMA 5-15P	5960	20F
BOUW-9642-MR	96 ½"	115	3.1	NEMA 5-15P	6920	20F

TECHNICAL SPECS (SELF-CONTAINED REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG
BOUW-4848-MS	48 ¼"	115/230	8.4	NEMA L14-20P
BOUW-5748-MS	60 ⅜"	115/230	8.4	NEMA L14-20P
BOUW-7648-MS	72 ½"	115/230	9.9	NEMA L14-20P
BOUW-9642-MS	96 ½"			NEMA L14-20P

INTERIOR FINISHES

Brushed Stainless Steel Base inlays with textured black shelf standards and shelf supports	
Textured Black	
Textured White	

EXTERIOR FINISHES

Black	
White	
Brushed Stainless Steel	
Painted Metal Standard _____	
Custom _____	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Oak Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
Clear Finish applied to Veneer	
Stain Finish Choice _____	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper strip colors Available upon request	

FRONT TEMPERED GLASS SNEEZEGUARD

- Square Stainless Steel Post	
- Round Stainless Steel Post	
- Base Mounted	

END PANELS

Solid	
Interior laminate the same as exterior	
Black interior	
White interior	
Brushed Stainless Steel interior	
Mirrored interior	
- Black T-mould edging	
- White T-mould edging	
- Stainless Steel T-mould edging	
1" black McCue impact bumper strip applied to the outside of the end panel	
Other McCue impact bumper strip colors available upon request	

COUNTERTOP

Rear Countertop	
- Brushed Stainless Steel	
- White Nylon Cutting Boards	
- Natural Maple Cutting Boards	
Front Countertop	
- Brushed Stainless Steel	
- Granite	
- Quartz	
- Solid Surfacing	

MISCELLANEOUS

Pull down night curtain	
Tempered glass shelf	
Tempered glass shelf	
2 ½" Inlay Riser Step	
Remove shelf	



DELICATESSEN



DFS - DELICATESSEN FULL-SERVICE DISPLAY

Flat Front Glass with Sloped Back



Page 66




Double Curve Front Glass with Sloped Back



Page 68



Square Front Glass with Sloped Back

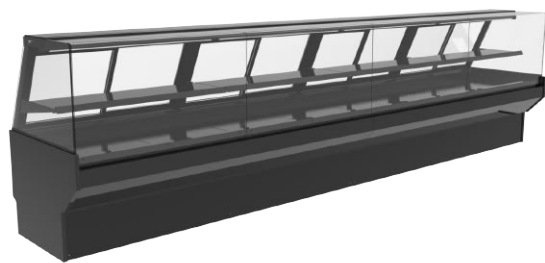

Page 70




FLAT FRONT GLASS WITH SLOPED BACK

DFS - DELICATESSEN FULL-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

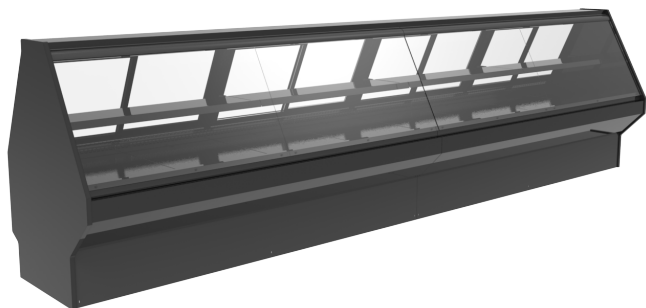

Custom options available, refer to options schedule on next page.

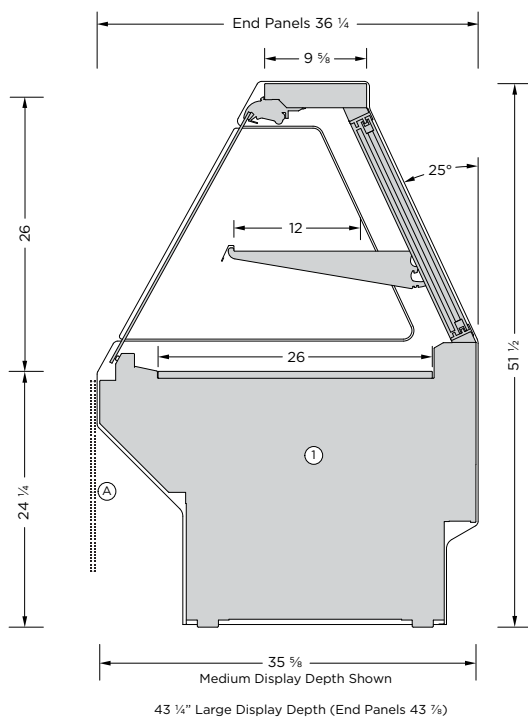

MODEL	LENGTH
DFSS-38FL-M	38 1/4"
DFSS-48FL-M	47 7/8"
DFSS-57FL-M	57 3/8"
DFSS-76FL-M	76 1/2"
DFSS-96FL-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Two display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Proprietary **Cold & Slow™** refrigeration design: high volume low velocity cooling.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Brushed stainless steel interior finish.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-12" adjustable brushed stainless steel shelves.
- Hydraulic lift-up front glass hardware.
- Rear sliding doors with sealed thermal glass.
- Front base décor panel options (A) provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



FLAT FRONT GLASS WITH SLOPED BACK

DFS - DELICATESSEN FULL-SERVICE DISPLAY

REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
DFSS-38FL-M	38 ¼"	115	1.9	NEMA 5-15P	2440	25F
DFSS-48FL-M	47 ⅞"	115	2.1	NEMA 5-15P	2920	25F
DFSS-57FL-M	57 ⅞"	115	2.8	NEMA 5-15P	3370	25F
DFSS-76FL-M	76 ½"	115	3.4	NEMA 5-15P	4320	25F
DFSS-96FL-M	95 ⅝"	115	3.9	NEMA 5-15P	5320	25F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Brushed stainless steel interior finish.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area.
- 1-12" adjustable brushed stainless steel shelf.
- Hydraulic lift-up front glass hardware
- Flat front glass

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Large display depth 43 ¼"	
Mirroring added to the rear sliding doors	
Brushed stainless steel scale stand	
Fold-down rear work shelf	
- White nylon top	
- Brushed stainless steel top	
Aluminum price tag mould attached to the front of the shelf	
Plastic price stripping attached to the front of the shelf	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.



DOUBLE CURVE FRONT GLASS WITH SLOPED BACK

DFS - DELICATESSEN FULL-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

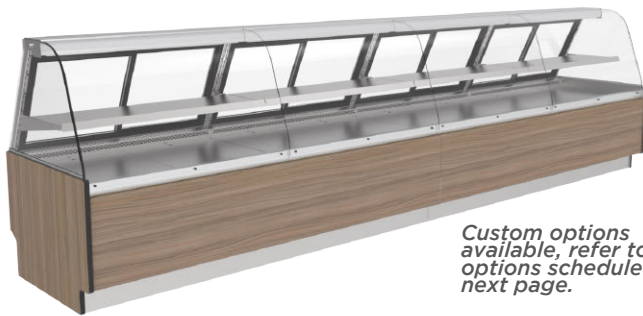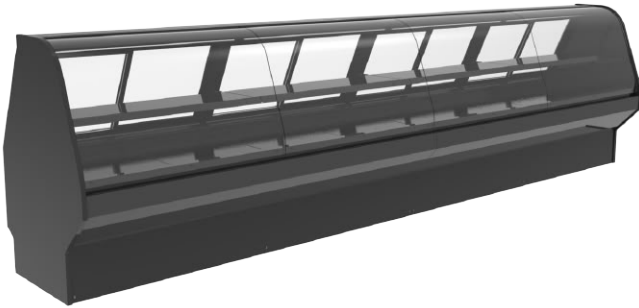

Custom options available, refer to options schedule on next page.

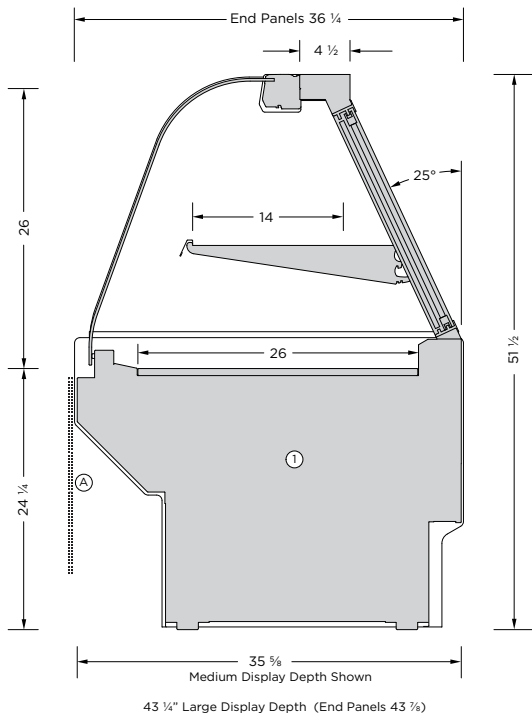

MODEL	LENGTH
DFSS-38DC-M	38 1/4"
DFSS-48DC-M	47 7/8"
DFSS-57DC-M	57 3/8"
DFSS-76DC-M	76 1/2"
DFSS-96DC-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Two display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Proprietary **Cold & Slow™** refrigeration design: high volume low velocity cooling.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Brushed stainless steel interior finish.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-12" adjustable brushed stainless steel shelves.
- Hydraulic lift-up front glass hardware.
- Rear sliding doors with sealed thermal glass.
- Front base décor panel options Ⓐ provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



DOUBLE CURVE FRONT GLASS WITH SLOPED BACK

DFS - DELICATESSEN FULL-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
DFSS-38DC-M	38 ¼"	115	1.9	NEMA 5-15P	2440	25F
DFSS-48DC-M	47 ⅞"	115	2.1	NEMA 5-15P	2920	25F
DFSS-57DC-M	57 ⅜"	115	2.8	NEMA 5-15P	3370	25F
DFSS-76DC-M	76 ½"	115	3.4	NEMA 5-15P	4320	25F
DFSS-96DC-M	95 ⅝"	115	3.9	NEMA 5-15P	5320	25F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Brushed stainless steel interior finish.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area.
- 1-12" adjustable brushed stainless steel shelf.
- Hydraulic lift-up front glass hardware
- Double Curve front glass

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	




MISCELLANEOUS

Large display depth 43 ¼"	
Mirroring added to the rear sliding doors	
Brushed stainless steel scale stand	
Fold-down rear work shelf	
- White nylon top	
- Brushed stainless steel top	
Aluminum price tag mould attached to the front of the shelf	
Plastic price stripping attached to the front of the shelf	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

REFRIGERATED

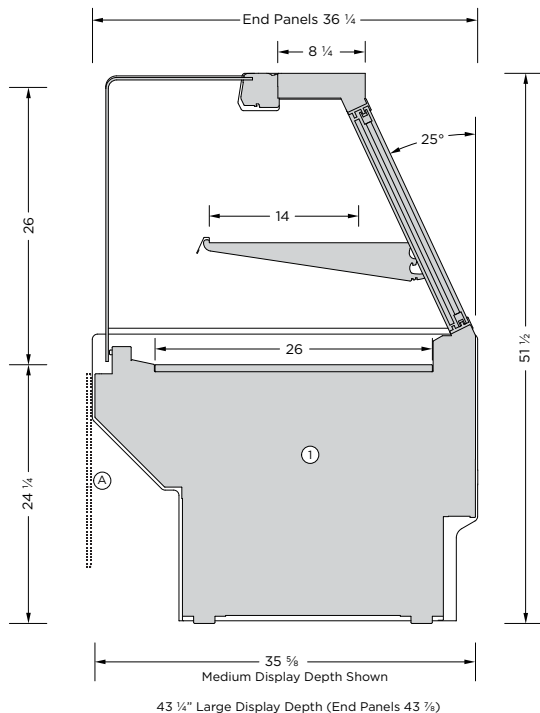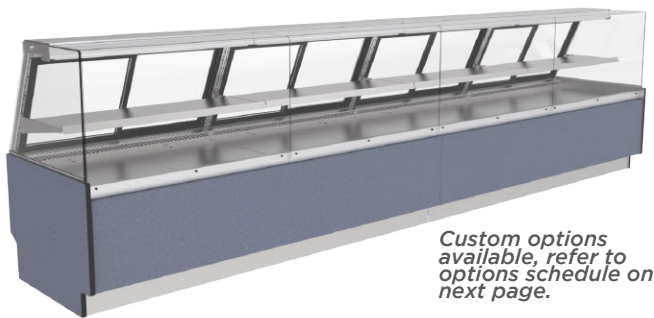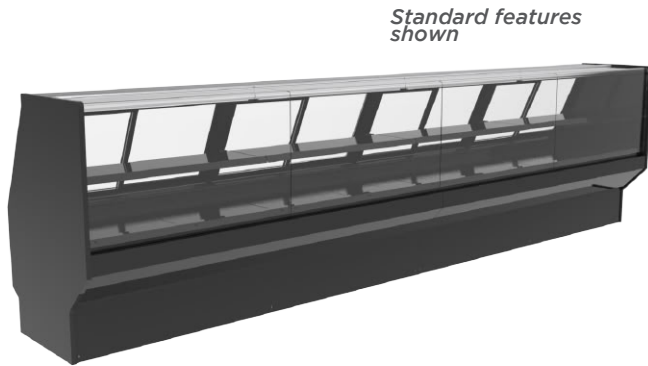

MODEL	LENGTH
DFSS-38SQ-M	38 ¼"
DFSS-48SQ-M	47 ⅞"
DFSS-57SQ-M	57 ⅜"
DFSS-76SQ-M	76 ½"
DFSS-96SQ-M	95 ⅝"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Two display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Proprietary **Cold & Slow™** refrigeration design: high volume low velocity cooling.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Brushed stainless steel interior finish.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-12" adjustable brushed stainless steel shelves.
- Hydraulic lift-up front glass hardware.
- Rear sliding doors with sealed thermal glass.
- Front base décor panel options ② provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



SQUARE FRONT GLASS WITH SLOPED BACK

DFS - DELICATESSEN FULL-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
DFSS-38SQ-M	38 ¼"	115	1.9	NEMA 5-15P	2440	25F
DFSS-48SQ-M	47 ⅞"	115	2.1	NEMA 5-15P	2920	25F
DFSS-57SQ-M	57 ⅞"	115	2.8	NEMA 5-15P	3370	25F
DFSS-76SQ-M	76 ½"	115	3.4	NEMA 5-15P	4320	25F
DFSS-96SQ-M	95 ⅝"	115	3.9	NEMA 5-15P	5320	25F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Brushed stainless steel interior finish.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area.
- 1-12" adjustable brushed stainless steel shelf.
- Hydraulic lift-up front glass hardware
- Square front glass

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	


MISCELLANEOUS

Large display depth 43 ¼"	
Mirroring added to the rear sliding doors	
Brushed stainless steel scale stand	
Fold-down rear work shelf	
- White nylon top	
- Brushed stainless steel top	
Aluminum price tag mould attached to the front of the shelf	
Plastic price stripping attached to the front of the shelf	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:


- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

DSS - DELICATESSEN SELF-SERVICE DISPLAY

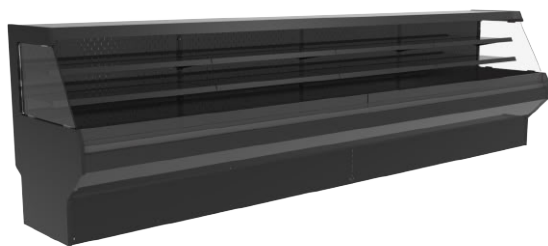



Matches Flat Front Glass Service Display Profile

Page 74

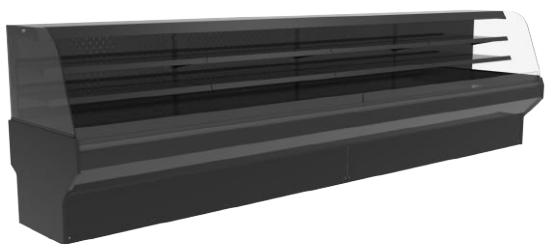


Matches Double Curve Front Glass Service Display Profile

Page 76

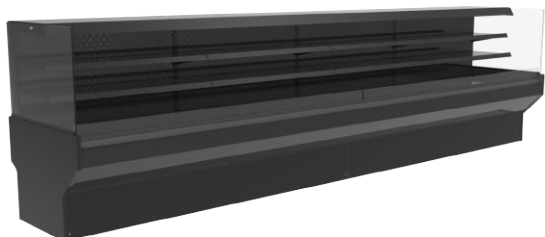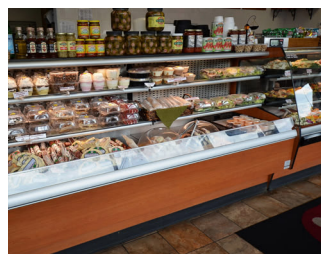


Matches Square Front Glass Service Display Profile

Page 78

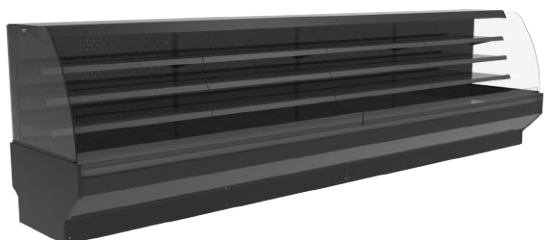

High-Capacity Medium Depth Service Display Curved End Panel Profile

Page 80

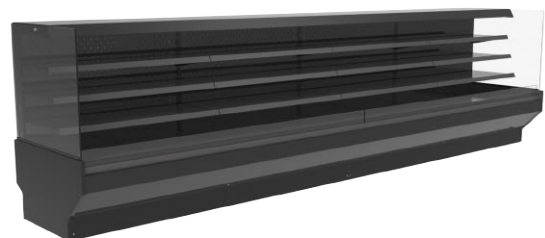

High-Capacity Medium Depth Service Display Square End Panel Profile

Page 82





MATCHES FLAT FRONT GLASS SERVICE DISPLAY PROFILE

DSS - DELICATESSEN SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

*Standard features
shown*

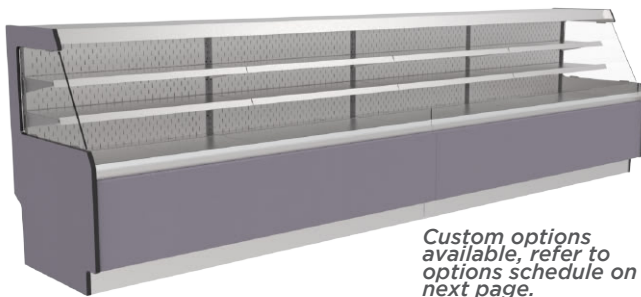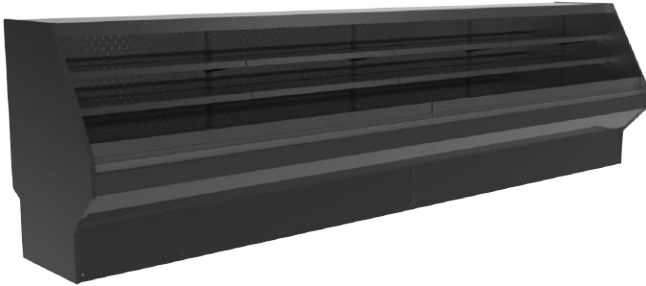

*Custom options
available, refer to
options schedule on
next page.*

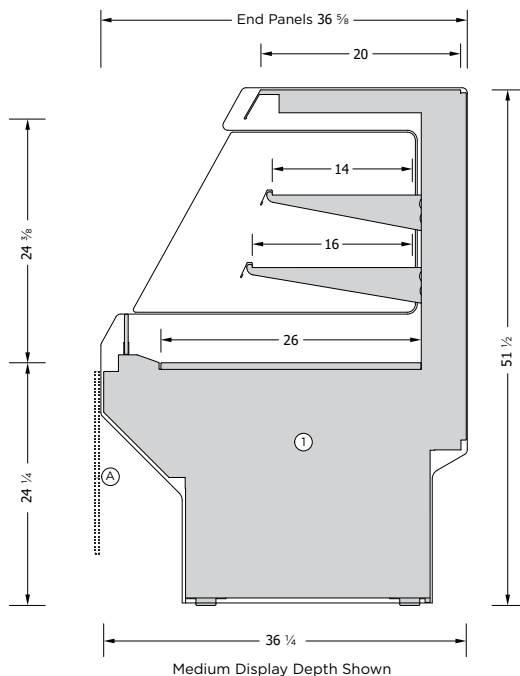

43 3/8" Large Display Depth (End Panels 44 1/4")


MODEL	LENGTH
DSSV-38FL-M	38 1/4"
DSSV-48FL-M	47 7/8"
DSSV-57FL-M	57 3/8"
DSSV-76FL-M	76 1/2"
DSSV-96FL-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Designed to match DFS-FL display height and depth.
- Two display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Brushed stainless steel interior finish.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-14" and 1-16" adjustable brushed stainless steel shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Front base décor panel options Ⓐ provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



MATCHES FLAT FRONT GLASS SERVICE DISPLAY PROFILE

DSS - DELICATESSEN SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
DSSV-38FL-M	38 ¼"	115	1.6	NEMA 5-15P	3575	20F
DSSV-48FL-M	47 ⅞"	115	1.8	NEMA 5-15P	4340	20F
DSSV-57FL-M	57 ⅞"	115	2.5	NEMA 5-15P	5055	20F
DSSV-76FL-M	76 ½"	115	2.8	NEMA 5-15P	6630	20F
DSSV-96FL-M	95 ⅝"	115	3.3	NEMA 5-15P	8160	20F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 36 ¼".
- Brushed stainless steel interior finish.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-14" and 1-16" adjustable brushed stainless steel with integrated front product stop.
- Top mounted roll-down night curtain
- Flat front glass profile

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Large display depth 43 ⅞"	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.



MATCHES DOUBLE CURVE FRONT GLASS SERVICE DISPLAY PROFILE

DSS - DELICATESSEN SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

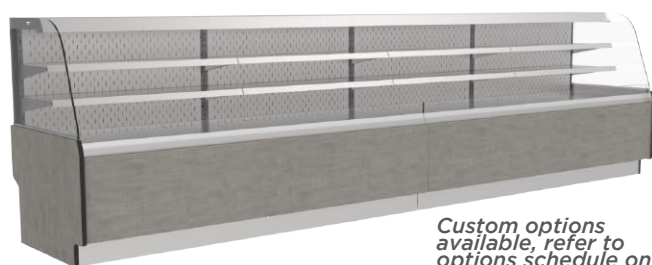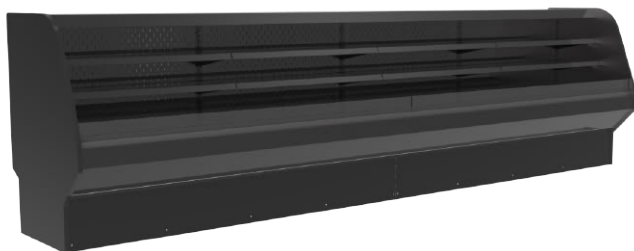

Custom options available, refer to options schedule on next page.

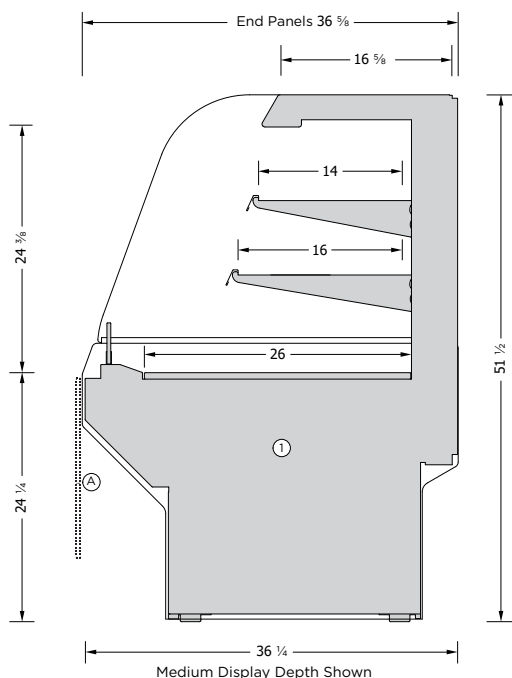

43 3/8" Large Display Depth (End Panels 44 1/4")


MODEL	LENGTH
DSSV-38DC-M	38 1/4"
DSSV-48DC-M	47 7/8"
DSSV-57DC-M	57 3/8"
DSSV-76DC-M	76 1/2"
DSSV-96DC-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Designed to match DFS-DC display height and depth.
- Two display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Brushed stainless steel interior finish.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-14" and 1-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Front base décor panel options ② provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



MATCHES DOUBLE CURVE FRONT GLASS SERVICE DISPLAY PROFILE DSS - DELICATESSEN SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
DSSV-38DC-M	38 ¼"	115	1.6	NEMA 5-15P	3575	20F
DSSV-48DC-M	47 ⅞"	115	1.8	NEMA 5-15P	4340	20F
DSSV-57DC-M	57 ⅝"	115	2.5	NEMA 5-15P	5055	20F
DSSV-76DC-M	76 ½"	115	2.8	NEMA 5-15P	6630	20F
DSSV-96DC-M	95 ⅝"	115	3.3	NEMA 5-15P	8160	20F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 36 ¼".
- Brushed stainless steel interior finish.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-14" and 1-16" adjustable brushed stainless steel with integrated front product stop.
- Top mounted roll-down night curtain
- Double curve front glass profile

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS	
The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS	
Large display depth 43 ⅞"	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.



MATCHES SQUARE FRONT GLASS SERVICE DISPLAY PROFILE

DSS - DELICATESSEN SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

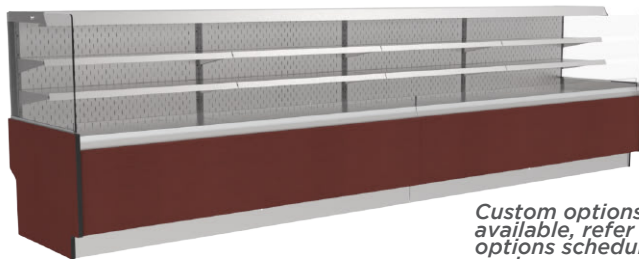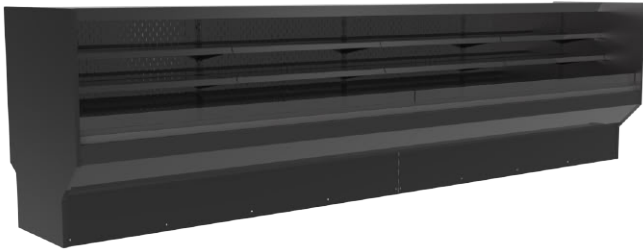

Custom options available, refer to options schedule on next page.

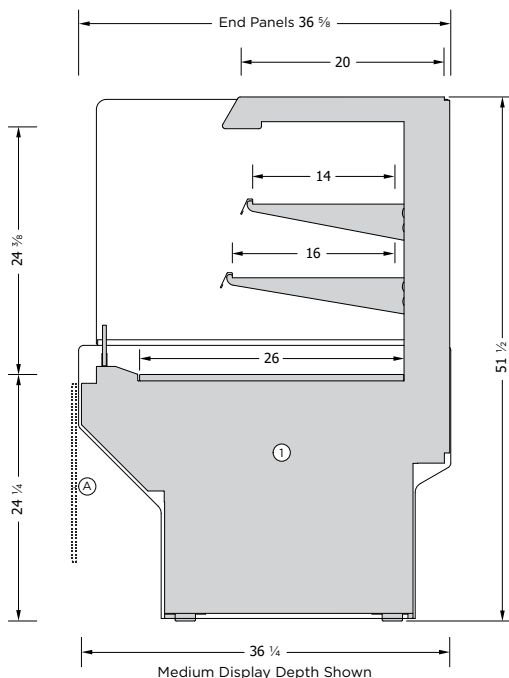


MODEL	LENGTH
DSSV-38SQ-M	38 1/4"
DSSV-48SQ-M	47 7/8"
DSSV-57SQ-M	57 3/8"
DSSV-76SQ-M	76 1/2"
DSSV-96SQ-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Designed to match DFS-SQ display height and depth.
- Two display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Brushed stainless steel interior finish.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-14" and 1-16" adjustable brushed stainless steel shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Front base décor panel options (A) provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



MATCHES SQUARE FRONT GLASS SERVICE DISPLAY PROFILE

DSS - DELICATESSEN SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
DSSV-38SQ-M	38 ¼"	115	1.6	NEMA 5-15P	3575	20F
DSSV-48SQ-M	47 ⅞"	115	1.8	NEMA 5-15P	4340	20F
DSSV-57SQ-M	57 ⅞"	115	2.5	NEMA 5-15P	5055	20F
DSSV-76SQ-M	76 ½"	115	2.8	NEMA 5-15P	6630	20F
DSSV-96SQ-M	95 ⅝"	115	3.3	NEMA 5-15P	8160	20F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 36 ¼".
- Brushed stainless steel interior finish.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-14" and 1-16" adjustable brushed stainless steel with integrated front product stop.
- Top mounted roll-down night curtain
- Square front glass profile

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Large display depth 43 ⅞"	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.



MATCHES HIGH-CAPACITY DOUBLE CURVE FRONT GLASS MEDIUM DEPTH SERVICE DISPLAY PROFILE

DSS - DELICATESSEN SELF-SERVICE DISPLAY

 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

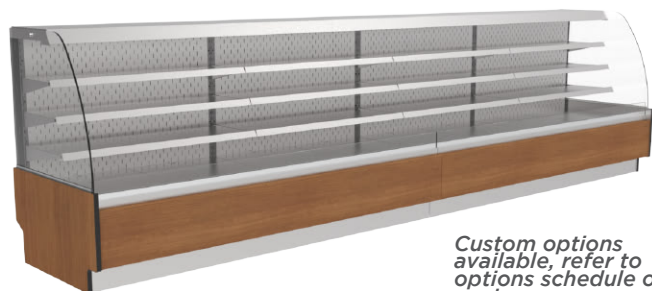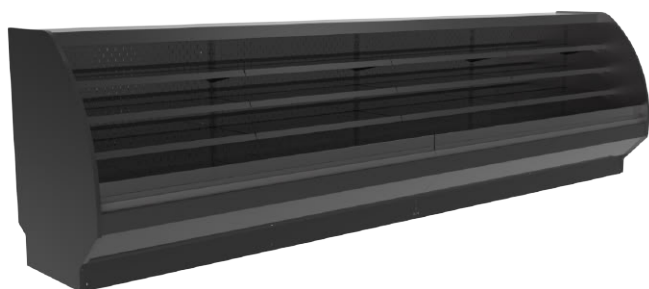

Custom options available, refer to options schedule on next page.


MODEL	LENGTH
DSSH-38DC-M	38 1/4"
DSSH-48DC-M	47 7/8"
DSSH-57DC-M	57 3/8"
DSSH-76DC-M	76 1/2"
DSSH-96DC-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Designed to match BFSH-DC display height and depth.
- Remote refrigeration option only for this display profile
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-12", 1-14" and 1-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Front base décor panel options  provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.

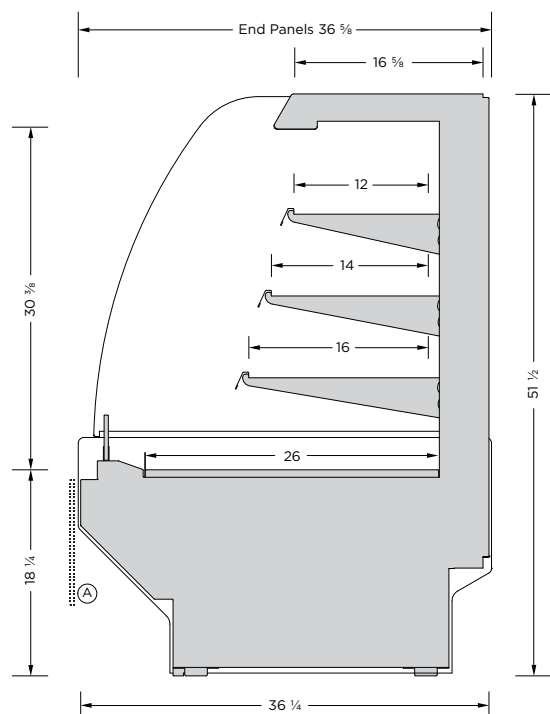



MATCHES HIGH-CAPACITY DOUBLE CURVE FRONT GLASS MEDIUM DEPTH SERVICE DISPLAY PROFILE

DSS - DELICATESSEN SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
DSSH-38DC-M	38 ¼"	115	1.6	NEMA 5-15P	3575	20F
DSSH-48DC-M	47 ⅞"	115	1.8	NEMA 5-15P	4340	20F
DSSH-57DC-M	57 ⅞"	115	2.5	NEMA 5-15P	5055	20F
DSSH-76DC-M	76 ½"	115	2.8	NEMA 5-15P	6630	20F
DSSH-96DC-M	95 ⅝"	115	3.3	NEMA 5-15P	8160	20F

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 36 ¼".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-12", 1-14" and 1-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Double Curve glass profile.

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	

ADDITIONAL FEATURES:




- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

MATCHES HIGH-CAPACITY SQUARE FRONT GLASS MEDIUM DEPTH SERVICE DISPLAY PROFILE

DSS - DELICATESSEN SELF-SERVICE DISPLAY

 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

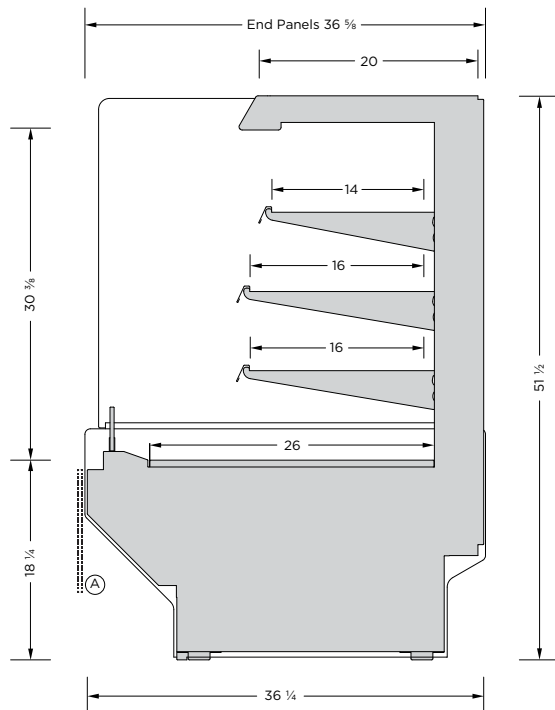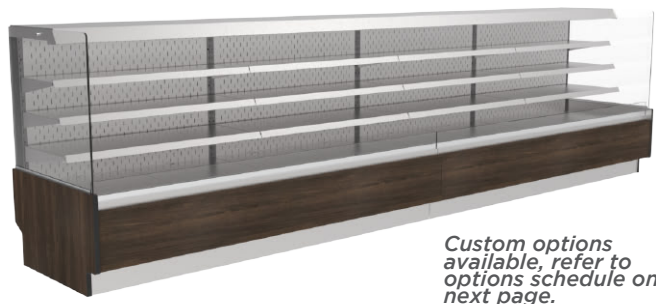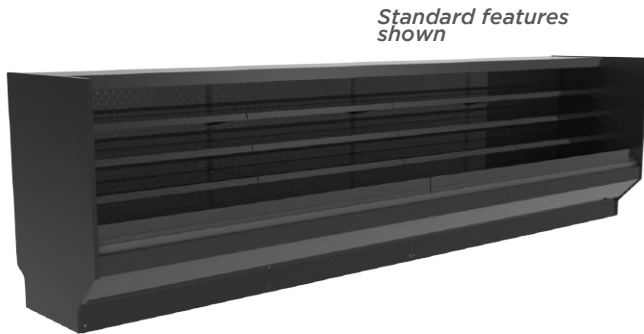

MODEL	LENGTH
DSSH-38SQ-M	38 1/4"
DSSH-48SQ-M	47 7/8"
DSSH-57SQ-M	57 3/8"
DSSH-76SQ-M	76 1/2"
DSSH-96SQ-M	95 5/8"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Designed to match BFSH-SQ display height and depth.
- Remote refrigeration option only for this display profile
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- 1-14" and 2-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Front base décor panel options  provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



MATCHES HIGH-CAPACITY SQUARE FRONT GLASS MEDIUM DEPTH SERVICE DISPLAY PROFILE

DSS - DELICATESSEN SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
DSSH-38SQ-M	38 ¼"	115	1.6	NEMA 5-15P	3575	20F
DSSH-48SQ-M	47 ⅞"	115	1.8	NEMA 5-15P	4340	20F
DSSH-57SQ-M	57 ⅞"	115	2.5	NEMA 5-15P	5055	20F
DSSH-76SQ-M	76 ½"	115	2.8	NEMA 5-15P	6630	20F
DSSH-96SQ-M	95 ⅝"	115	3.3	NEMA 5-15P	8160	20F

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 36 ¼".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-14" and 2-16" adjustable metal shelves with integrated front product stop.
- Top mounted roll-down night curtain.
- Square glass profile.

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

DSD - DELICATESSEN SINGLE LEVEL SELF-SERVICE DISPLAY

24” Front Height with a 36” Rear Height



Page 86



24” Front Height with a 42” or 48” Rear Height



Page 88



18” Front Height with a 30” Rear Height



Page 90




18” Front Height with a 36” or 42” Rear Height




Page 92



DSD - FEATURES TO MAKE YOUR SHOWCASE WHAT YOU NEED IT TO BE

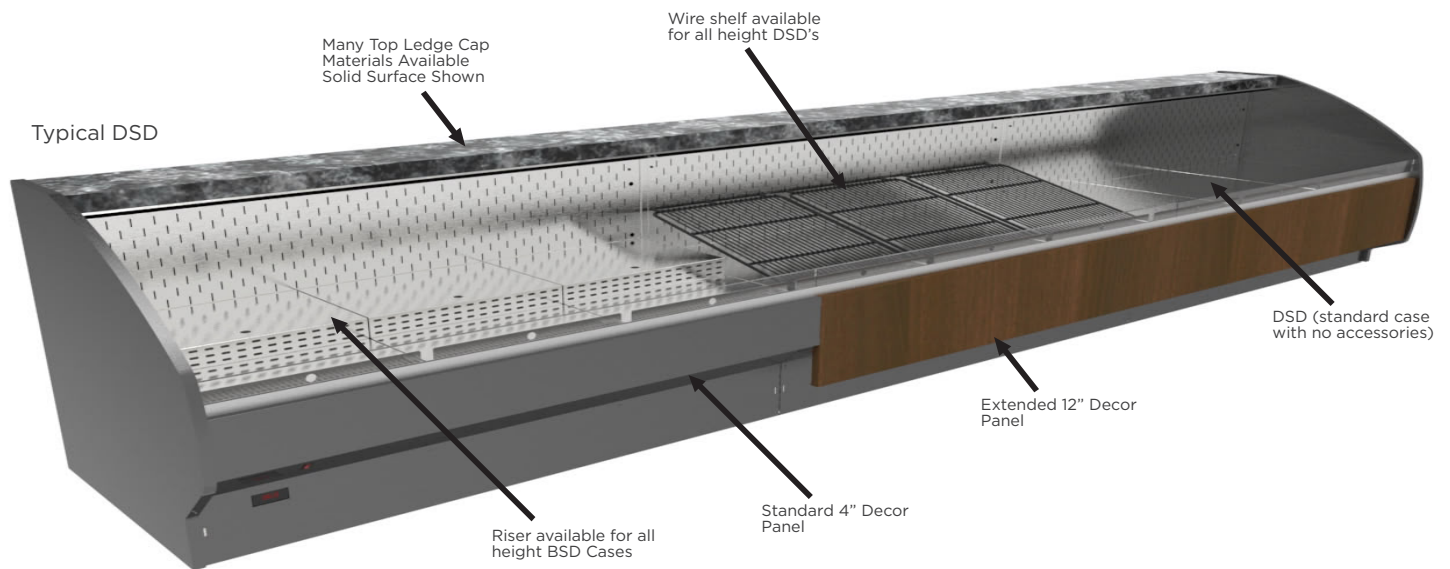


30" & 36" High DSD shown with Solid Surface ledge

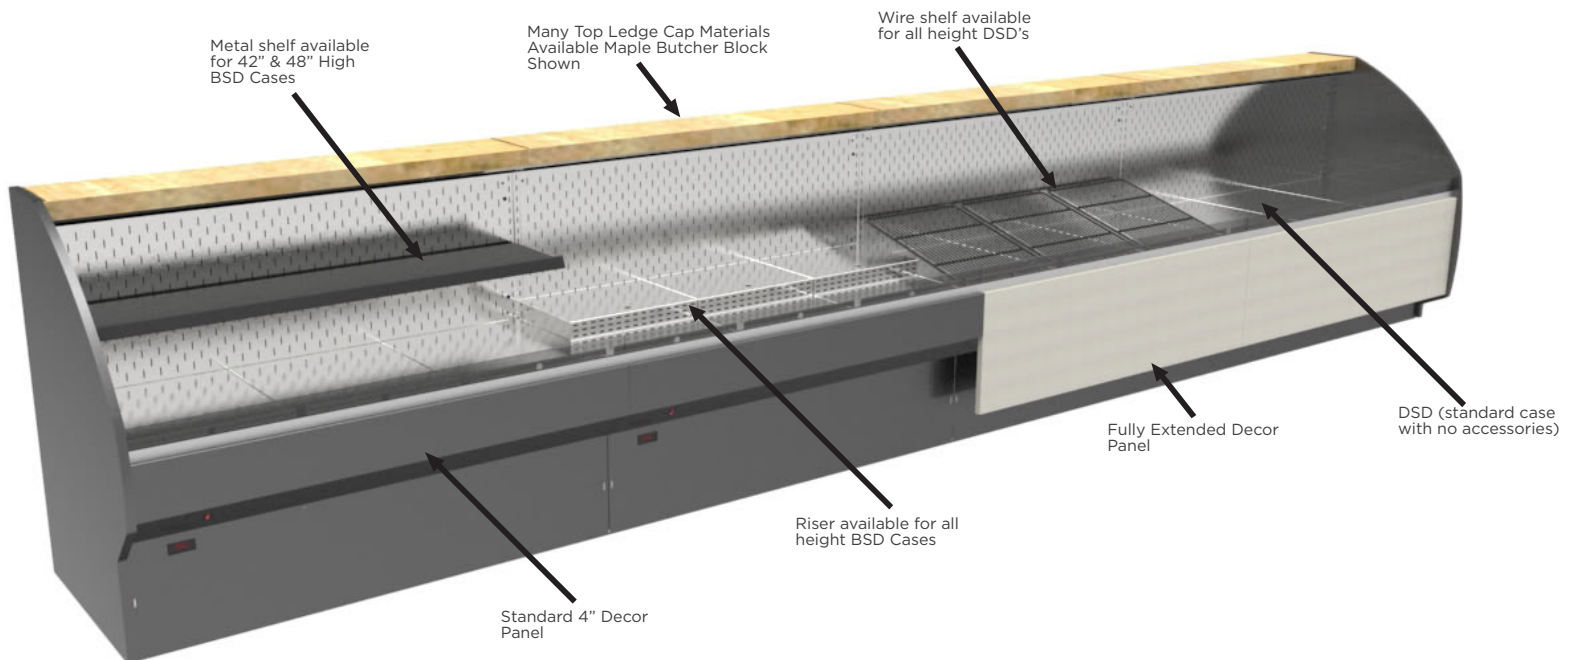


42" & 48" High DSD shown with Butcher Block ledge

DSD - DELICATESSEN SINGLE LEVEL SELF-SERVICE DISPLAY

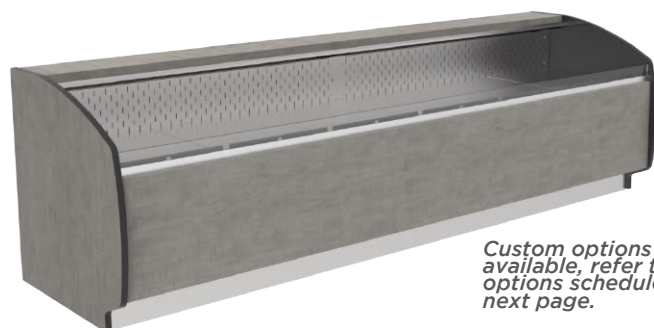

*Custom options
available, refer to
options schedule on
next page.*

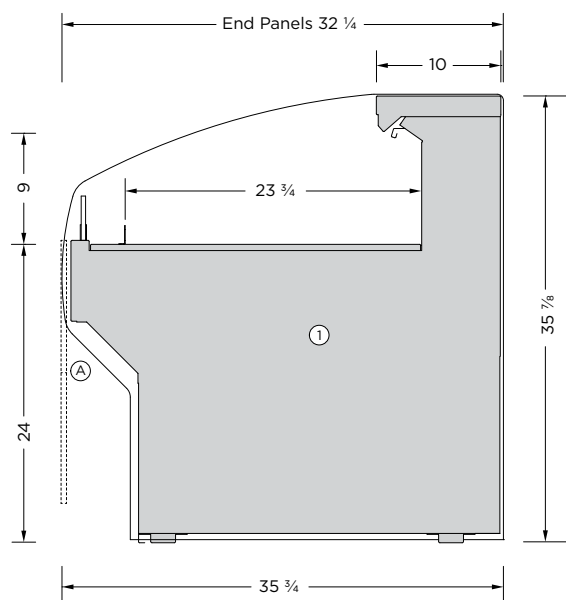

MODEL	LENGTH
DSDN-3636-M	36 ¼"
DSDN-4836-M	48 ¼"
DSDN-6036-M	60 ⅜"
DSDN-7236-M	72 ½"
DSDN-9636-M	96 ½"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Two display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display.
- The LED lighting is available in various light intensities/spectrums.
- 1 ½" front product stop integrated to the base inlays.
- Front base décor panel options ② provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



24" FRONT HEIGHT WITH A 36" REAR HEIGHT

DSD - DELICATESSEN SINGLE LEVEL SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
DSDN-3636-M	36 ¼"	115	0.7	NEMA 5-15P	2719	20F
DSDN-4836-M	48 ¼"	115	0.9	NEMA 5-15P	3619	20F
DSDN-6036-M	60 ¾"	115	0.9	NEMA 5-15P	4528	20F
DSDN-7236-M	72 ½"	115	0.9	NEMA 5-15P	5438	20F
DSDN-9636-M	96 ½"	115	1.1	NEMA 5-15P	7238	20F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS


Large display depth 43 ¼"	
Top mounted roll-down thermal night curtain	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

24" FRONT HEIGHT WITH A 42" & 48" REAR HEIGHT

DSD - DELICATESSEN SINGLE LEVEL SELF-SERVICE DISPLAY

 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

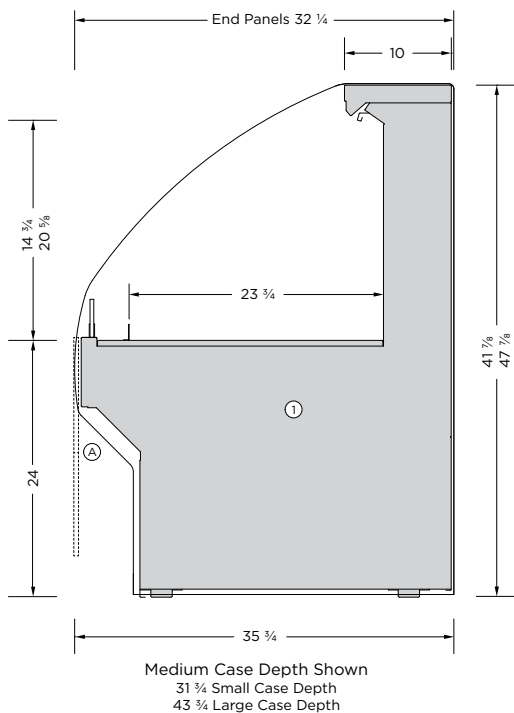

MODEL	LENGTH
DSDN-3642-M	36 1/4"
DSDN-4842-M	48 1/4"
DSDN-6042-M	60 3/8"
DSDN-7242-M	72 1/2"
DSDN-9642-M	96 1/2"
DSDN-3648-M	36 1/4"
DSDN-4848-M	48 1/4"
DSDN-6048-M	60 3/8"
DSDN-7248-M	72 1/2"
DSDN-9248-M	96 1/2"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Two display depths available, refer to the dimensioned illustration. ①
- Remote or self-contained refrigeration system options.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display.
- The LED lighting is available in various light intensities/spectrums.
- 1 1/2" front product stop integrated to the base inlays.
- Front base décor panel options ② provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



24" FRONT HEIGHT WITH A 42" & 48" REAR HEIGHT

DSD - DELICATESSEN SINGLE LEVEL SELF-SERVICE DISPLAY

REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
DSDN-3642-M	36 ¼"	115	1.2	NEMA 5-15P	2794	20F
DSDN-3648-M					2870	
DSDN-4842-M	48 ¼"	115	1.4	NEMA 5-15P	3719	20F
DSDN-4848-M					3820	
DSDN-6042-M	60 ¾"	115	1.4	NEMA 5-15P	4654	20F
DSDN-6048-M					4780	
DSDN-7242-M	72 ½"	115	1.4	NEMA 5-15P	5589	20F
DSDN-7248-M					5740	
DSDN-9642-M	96 ½"	115	1.6	NEMA 5-15P	7439	20F
DSDN-9248-M					7640	

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Large display depth 43 ¼"	
Top mounted roll-down thermal night curtain	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	


18" FRONT HEIGHT WITH A 30" REAR HEIGHT

DSD - DELICATESSEN SINGLE LEVEL SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

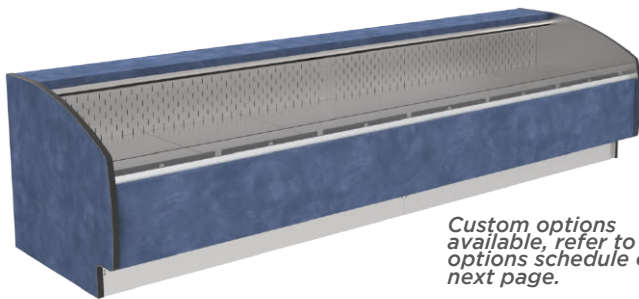

Custom options available, refer to options schedule on next page.

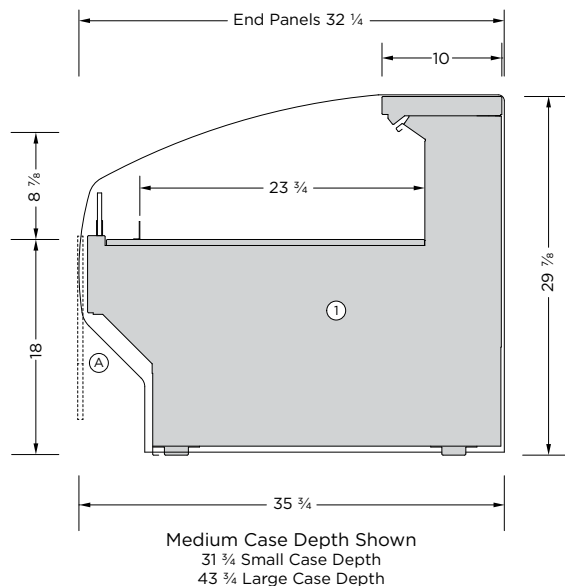


MODEL	LENGTH
DSDL-3630-M	36 1/4"
DSDL-4830-M	48 1/4"
DSDL-6030-M	60 3/8"
DSDL-7230-M	72 1/2"
DSDL-9630-M	96 1/2"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Remote refrigeration option only for this display profile.
- Two display depths available, refer to the dimensioned illustration. ①
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display.
- The LED lighting is available in various light intensities/spectrums.
- 1 1/2" front product stop integrated to the base inlays.
- Front base décor panel options Ⓐ provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



18" FRONT HEIGHT WITH A 30" REAR HEIGHT

DSD - DELICATESSEN SINGLE LEVEL SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
DSDL-3630-M	36 ¼"	115	0.7	NEMA 5-15P	2719	20F
DSDL-4830-M	48 ¼"	115	0.9	NEMA 5-15P	3619	20F
DSDL-6030-M	60 ¾"	115	0.9	NEMA 5-15P	4528	20F
DSDL-7230-M	72 ½"	115	0.9	NEMA 5-15P	5438	20F
DSDL-9630-M	96 ½"	115	1.1	NEMA 5-15P	7238	20F

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area.

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
18"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Large display depth 43 ¼"	
Top mounted roll-down thermal night curtain	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

18" FRONT HEIGHT WITH A 36" & 42" REAR HEIGHT

DSD - DELICATESSEN SINGLE LEVEL SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown



Custom options available, refer to options schedule on next page.

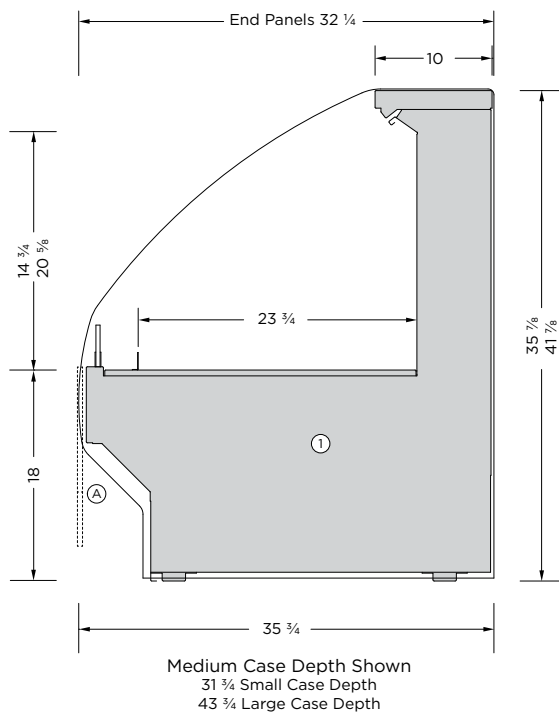

MODEL	LENGTH
DSDL-3636-M	36 1/4"
DSDL-4836-M	48 1/4"
DSDL-6036-M	60 3/8"
DSDL-7236-M	72 1/2"
DSDL-9636-M	96 1/2"
DSDL-3642-M	36 1/4"
DSDL-4842-M	48 1/4"
DSDL-6042-M	60 3/8"
DSDL-7242-M	72 1/2"
DSDL-9242-M	96 1/2"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Remote refrigeration option only for this display profile.
- Two display depths available, refer to the dimensioned illustration. ①
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display.
- The LED lighting is available in various light intensities/spectrums.
- 1 1/2" front product stop integrated to the base inlays.
- Front base décor panel options Ⓐ provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



18" FRONT HEIGHT WITH A 36" & 42" REAR HEIGHT

DSD - DELICATESSEN SINGLE LEVEL SELF-SERVICE DISPLAY

REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
DSDL-3636-M	36 ¼"	115	1.2	NEMA 5-15P	2794	20F
DSDL-3642-M					2870	
DSDL-4836-M	48 ¼"	115	1.4	NEMA 5-15P	3719	20F
DSDL-4842-M					3820	
DSDL-6036-M	60 ¾"	115	1.4	NEMA 5-15P	4654	20F
DSDL-6042-M					4780	
DSDL-7236-M	72 ½"	115	1.4	NEMA 5-15P	5589	20F
DSDL-7242-M					5740	
DSDL-9636-M	96 ½"	115	1.6	NEMA 5-15P	7439	20F
DSDL-9242-M					7640	

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝".
- Brushed stainless steel interior finish.
- Black or white painted front exterior metal décor pan with a 4" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

END PANELS


The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Large display depth 43 ¼"	
Top mounted roll-down thermal night curtain	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	

REFRIGERATED DISPLAY ACCESSORIES



2 1/2" X 13" SINGLE STEP RISER

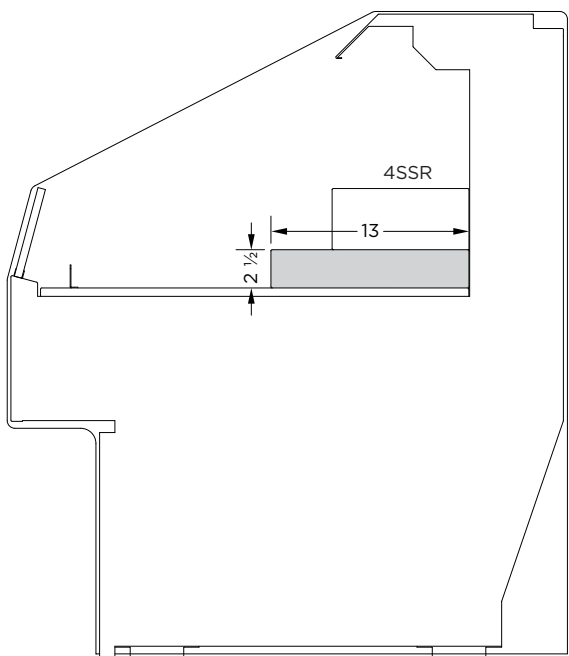

DISPLAY WIDTH	PART #	QTY
24"	2SSR-24-P*, S*	1
38"	2SSR-38-P, S	1
48"	2SSR-48-P, S	1
57"	2SSR-57-P, S	1
76"	2SSR-38-P, S	2
96"	2SSR-48-P, S	2

P = Painted powdercoat finish
S = Brushed stainless steel

4" X 9" SINGLE STEP RISER

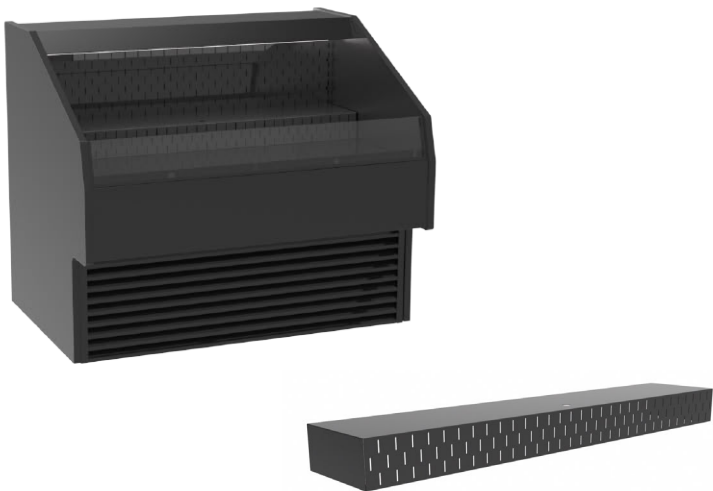
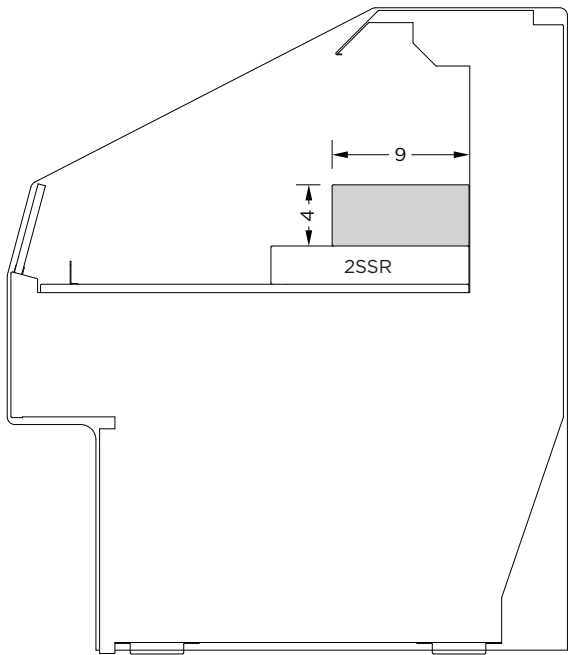


DISPLAY WIDTH	PART #	QTY
24"	4SSR-24-P*, S*	1
38"	4SSR-38-P, S	1
48"	4SSR-48-P, S	1
57"	4SSR-57-P, S	1
76"	4SSR-38-P, S	2
96"	4SSR-48-P, S	2

P = Painted powdercoat finish
S = Brushed stainless steel

REFRIGERATED DISPLAY ACCESSORIES


THREE TIER STEPPED RISER

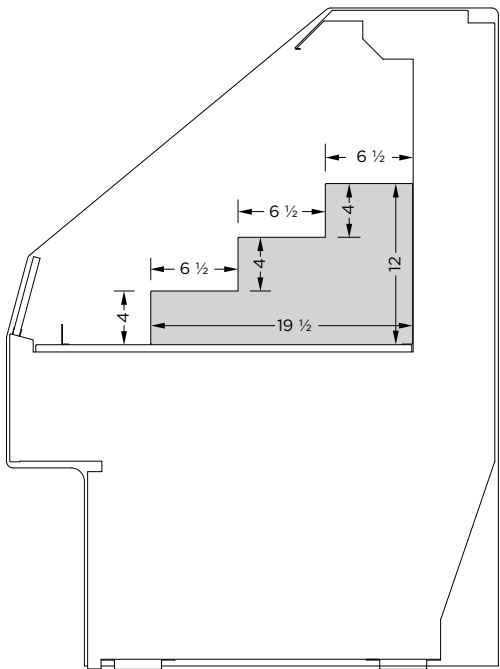

DISPLAY WIDTH	PART #	QTY
24"	3TSR-24-P*, S*	1
38"	3TSR-19-P, S	2
48"	3TSR-24-P, S	2
57"	3TSR-19-P, S	3
76"	3TSR-19-P, S	4
96"	3TSR-24-P, S	4

P = Painted powdercoat finish
S = Brushed stainless steel

FOUR TIER STEPPED RISER

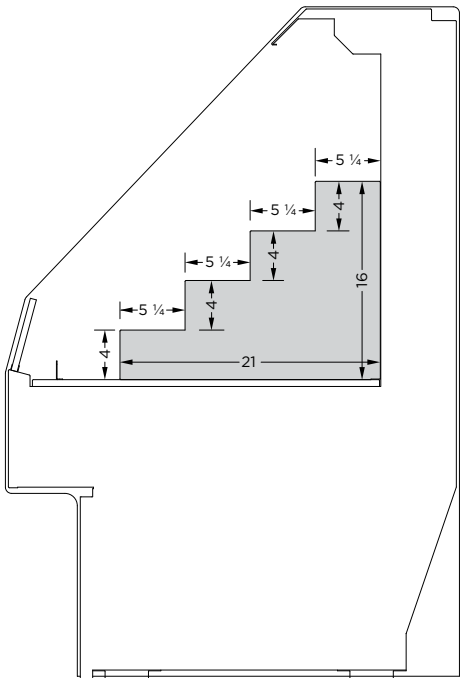


DISPLAY WIDTH	PART #	QTY
24"	4TSR-24-P*, S*	1
38"	4TSR-19-P, S	2
48"	4TSR-24-P, S	2
57"	4TSR-19-P, S	3
76"	4TSR-19-P, S	4
96"	4TSR-24-P, S	4

P = Painted powdercoat finish
S = Brushed stainless steel

REFRIGERATED DISPLAY ACCESSORIES


CLIP-IN ANGLED BASE INLAY

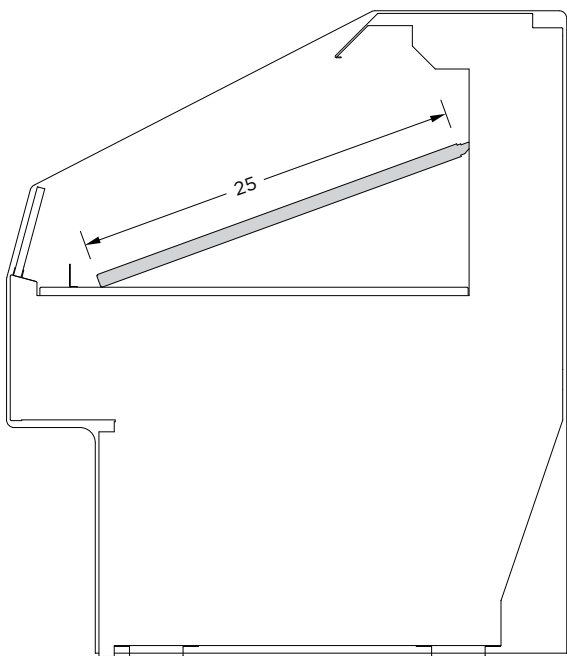

DISPLAY WIDTH	PART #	QTY
24"	ABI-24-P*, S*	1
38"	ABI-38-P, S	1
48"	ABI-48-P, S	1
57"	ABI-57-P, S	1
76"	ABI-38-P, S	2
96"	ABI-48-P, S	2

P = Painted powdercoat finish
S = Brushed stainless steel


TOP MOUNTED CLIP-ON DRY SHELF

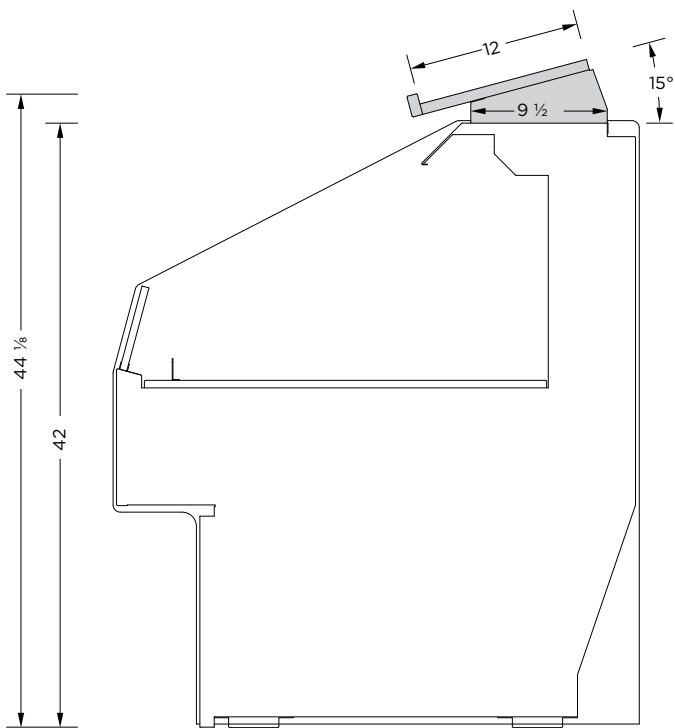

DISPLAY WIDTH	PART #
24"	CDS-24
38"	CDS-38
48"	CDS-48

REFRIGERATED DISPLAY ACCESSORIES

CLIP-ON SIGN PANEL

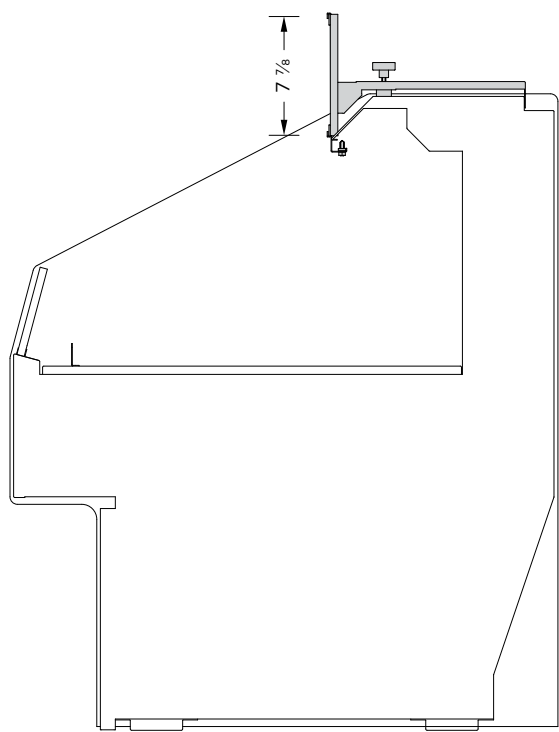



DISPLAY WIDTH	PART #
24"	CSP-24-P*, S*
38"	CSP-38-P, S
48"	CSP-48-P, S

P = Painted powdercoat finish
S = Brushed stainless steel

FEATURES:

- Plastic channels top & bottom to hold paper signs
- 3-track sign available

RAISED TOP MOUNTED CLIP-ON DRY SHELF

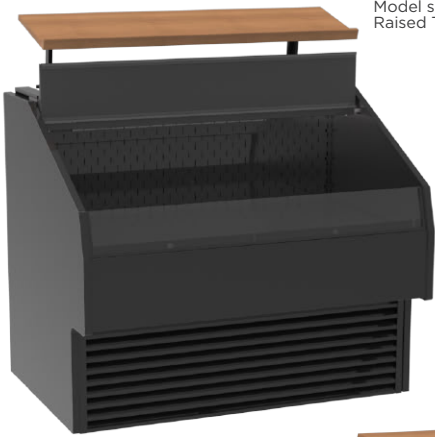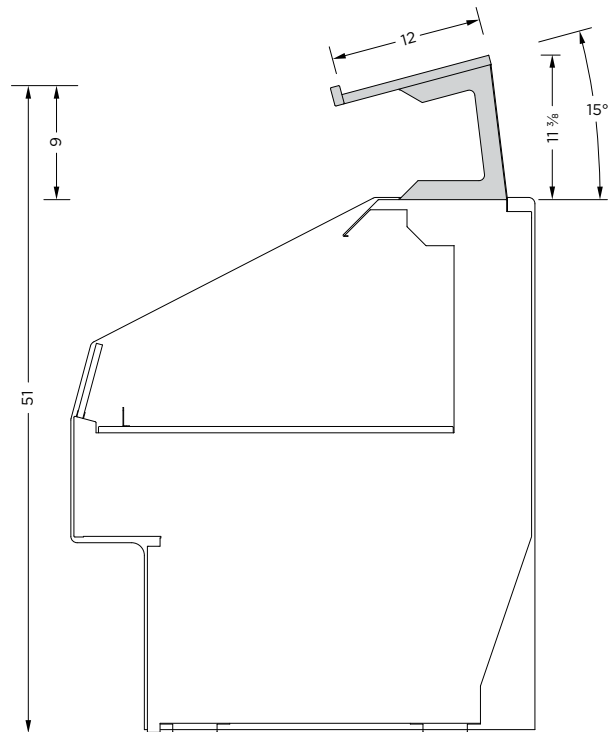

Model shown w/Clip-On Sign Panel & Raised Top Mounted Clip-On Dry Shelf




DISPLAY WIDTH	PART #
24"	RCDS-24
38"	RCDS-38
48"	RCDS-48

DOUW - DELICATESSEN SELF-SERVICE DISPLAY & REAR PREPARATION STATION



Rear Cake Decorating Station with Dry Base Storage

Page 100

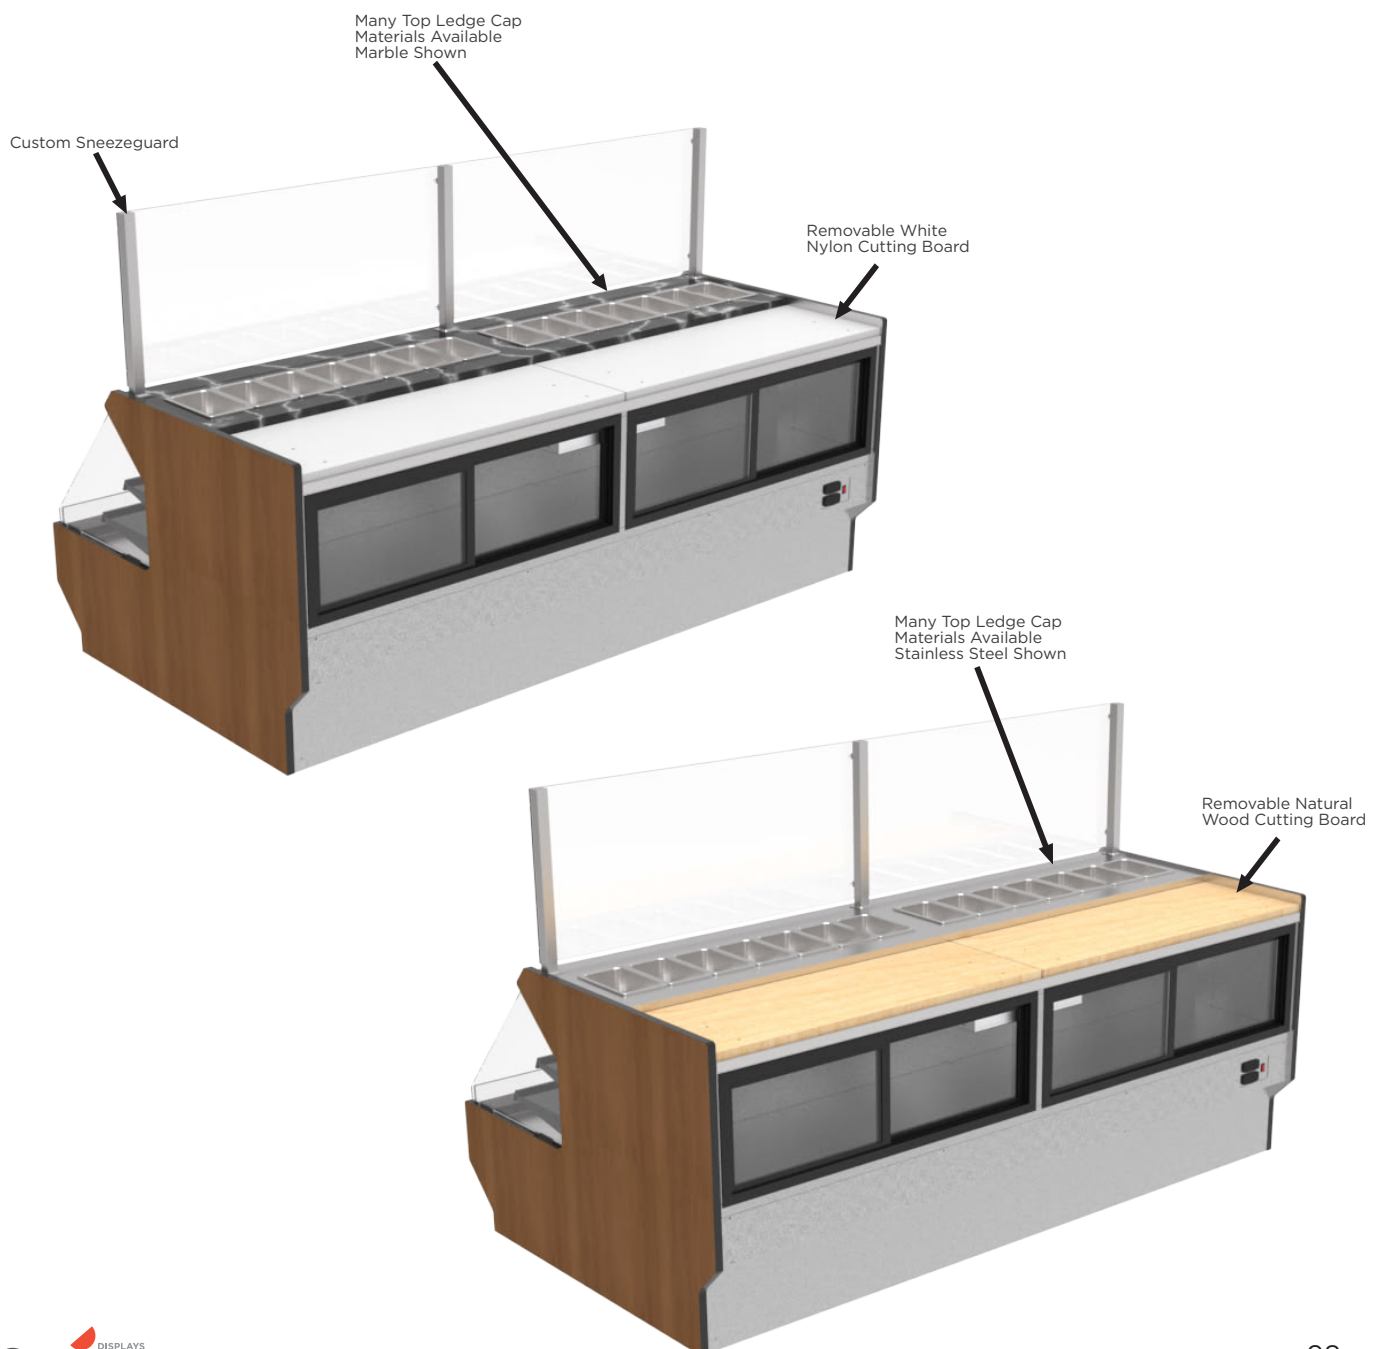

DOUW - DELICATESSEN SELF-SERVICE DISPLAY & REAR PREPARATION STATION




Typical DOUW



Standard Square Stainless Steel Sneezeguard Post



Custom Square Stainless Steel Sneezeguard Post

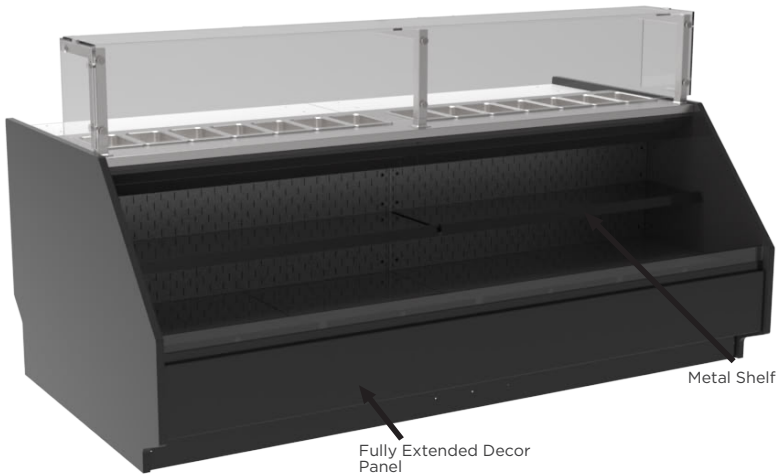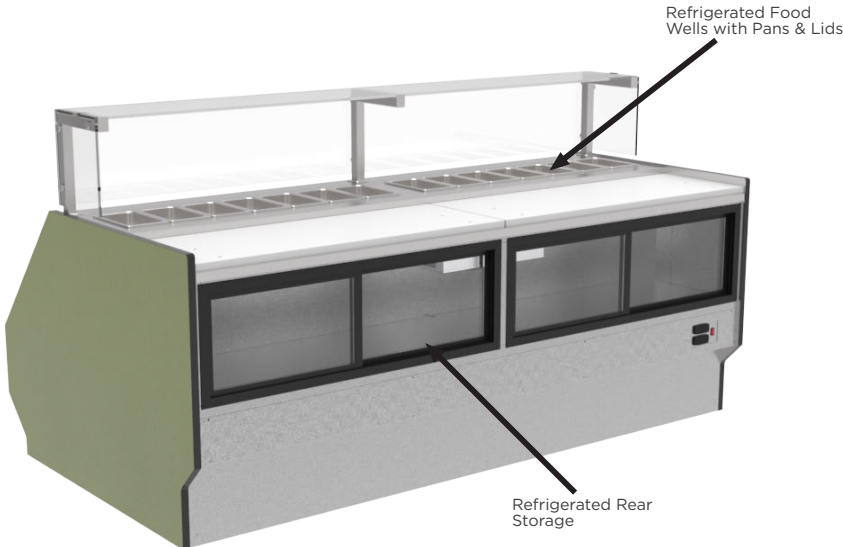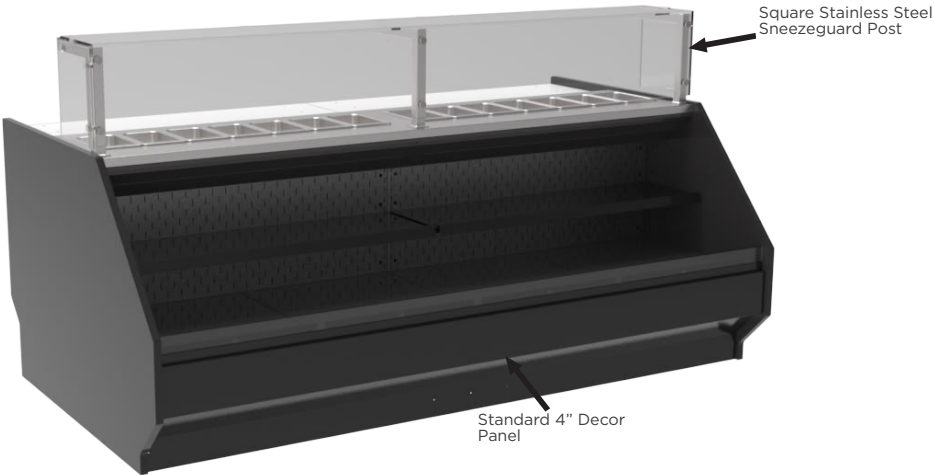


FRONT SELF-SERVICE DISPLAY, REAR FOOD PREPARATION STATION & REFRIGERATED BASE STORAGE CABINET

DOUW - DELICATESSEN COMBINATION DISPLAY

 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

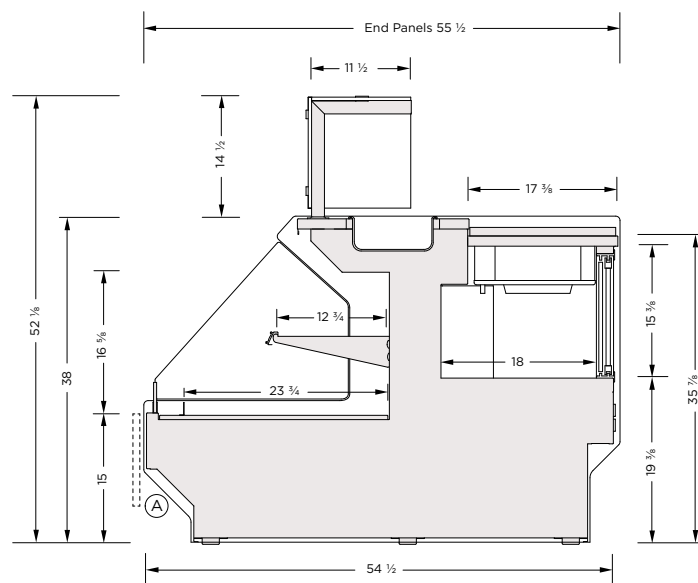

MODEL	LENGTH
DOUW-4838-MR	48 1/4"
DOUW-6038-MR	60 3/8"
DOUW-7238-MR	72 1/2"
DOUW-9638-MR	96 1/2"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Brushed stainless steel internal cabinet construction.
- Many exterior finish options available; powder coat paint, brushed stainless steel, decorative laminates and natural wood finishes.
- Three interior finish options: textured powder coat black, white and brushed stainless steel.
- The front décor panel can be extended to provide a more finished cabinet look.
- Other custom options are . Refer to the options schedule on the next page.
- The refrigerated front self-service display has a LED light strip mounted to the top ledge of the display area, and one 12"D adjustable metal shelf with a front product stop and LED light strip mounted to the bottom of the shelf.
- The refrigerated rear storage cabinet is constructed of brushed stainless steel and has rear thermal sliding doors.
- The top preparation area has an integrated front refrigerated well to hold a series of 1/4 stainless steel food pans and lids. The prep counter is brushed stainless steel and has a removeable white nylon cutting board.
- The top preparation area is protected by a front mounted tempered glass sneeze guard, top shelf and end panels.
- Designed to maintain the critical temperature of the products within the display, the storage cabinet and the top refrigerated well at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity.
- The refrigeration system is adjusted by two temperature controllers, one to control the front and top of the display and the other to control the rear storage cabinet.
- ETL electrical certification and NSF-7 standards.
- Self-contained refrigeration available. Contact Cayuga Displays for details.

Note: Information and specifications may change due to engineering improvements.

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre chilled product only.
- ETL listed and sanitation certified to NSF 7.
- 1-year parts and labor warranty



FRONT SELF-SERVICE DISPLAY, REAR FOOD PREPARATION STATION & REFRIGERATED BASE STORAGE CABINET

DOUW - DELICATESSEN COMBINATION DISPLAY

REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
DOUW-4838-MR	48 ¼"	115	1.4	NEMA 5-15P	3970	20F
DOUW-6038-MR	60 ¾"	115	1.6	NEMA 5-15P	4760	20F
DOUW-7238-MR	72 ½"	115	2.1	NEMA 5-15P	6350	20F
DOUW-9638-MR	96 ½"	115	2.3	NEMA 5-15P	7935	20F

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Black or white textured powder coat interior.
- Black or white exterior.
- LED light strip mounted to the top ledge of the self-service display.
- One 12"D adjustable metal shelf with a front product stop and LED light strip mounted to the bottom of the shelf.
- Brushed stainless steel refrigerated base storage cabinet with thermal sliding doors.
- Top front mounted refrigerated well holds a series of ¼ stainless steel food pans and lids.
- Brushed stainless steel preparation countertop with a removable white nylon cutting board.
- The preparation area is protected by a 14"H front mounted tempered glass sneeze guard, 12"D top shelf and end panels.
- The refrigerated well has a separate drain line with a shut-off used for cleaning purposes.
- The system has two temperature controllers, one to control the front and top display, the other for the rear storage cabinet.
- Condensate water is removed by an electrical evaporator.

CUSTOM FEATURES:

END PANELS

The same interior/exterior laminate	
Brushed Stainless Steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

FRONT DÉCOR PANEL

Extended to 9" with 6" kick	
-----------------------------	--

INTERIOR FINISH

Brushed Stainless Steel	
-------------------------	--

FRONT TEMPERED GLASS SNEEZEGUARD

Seamless base mounted sneezeguard	
Straight sneezeguard with square posts	
Straight sneezeguard with round posts	

COUNTERTOP

Front Ledge Countertop	
- Granite	
- Quartz	
- Solid Surfacing	

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Other custom laminate specs: _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
Clear Finish applied to Veneer	
Stain Finish Choice _____	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS OPTIONS

Pull down night curtain for front display	
PTM on shelf front	
2 ½" Inlay Riser Step	
4" Inlay Riser Step	
Additional shelf level with integrated LED light strip	
Perforated angled inlay panel	



SPECIALTY



SPECIALTY SELF-SERVICE DISPLAY



FIVE LEVEL 76”H UPRIGHT MEDIUM DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION

Page 104



SIX LEVEL 82”H UPRIGHT MEDIUM DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION

Page 106



FOUR LEVEL 60”H UPRIGHT MEDIUM DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION

Page 108



Three LEVEL 54”H UPRIGHT SMALL DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION

Page 120

FIVE LEVEL 76”H UPRIGHT MEDIUM DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION

SSL - UPRIGHT SELF-SERVICE DISPLAY


 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS



Standard features shown

Custom options available, refer to options schedule on next page.

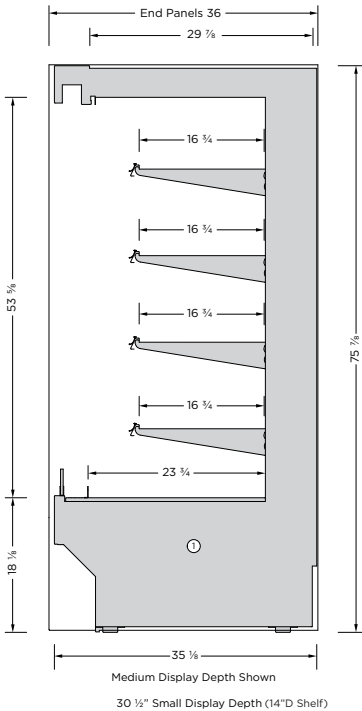

MODEL	LENGTH
SSL-3876-M	36 1/4"
SSL-4876-M	48 1/4"
SSL-6076-M	60 3/8"
SSL-7276-M	72 1/2"
SSL-9676-M	96 1/2"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Two display depths available, refer to the dimensioned illustration. ①
- Remote refrigeration option only for this display profile.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- Medium display depth: 4-16" (Small display depth: 4-14") adjustable metal shelves with integrated front product stop.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



FIVE LEVEL 76"H UPRIGHT MEDIUM DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION

SSL - UPRIGHT SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)

MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
SSL-3876-M	36 ¼"	115	1.4	NEMA 5-15P	4870	20F
SSL-4876-M	48 ¼"	115	1.4	NEMA 5-15P	5975	20F
SSL-6076-M	60 ¾"	115	1.4	NEMA 5-15P	7170	20F
SSL-7276-M	72 ½"	115	1.9	NEMA 5-15P	9560	20F
SSL-9676-M	96 ½"	115	2.1	NEMA 5-15P	11950	20F

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 34 ½" or small display depth 30 ½".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 5" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 4-16" adjustable metal shelves with integrated front product stop.

CUSTOM FEATURES:

EXTERIOR FINISHES

Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Thermal glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.


SIX LEVEL 82"H UPRIGHT MEDIUM DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION

SSL - UPRIGHT SELF-SERVICE DISPLAY




REFRIGERATED


CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

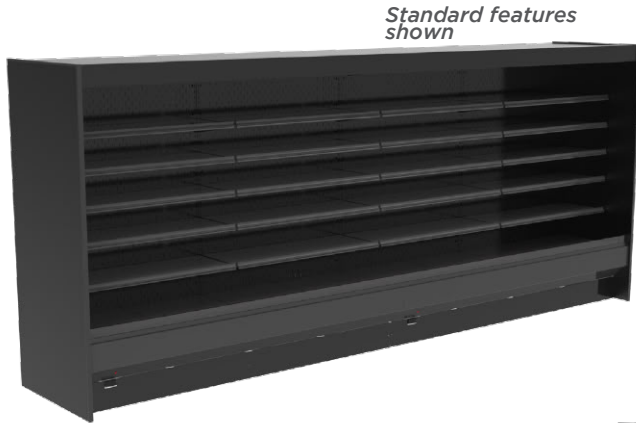

Standard features shown

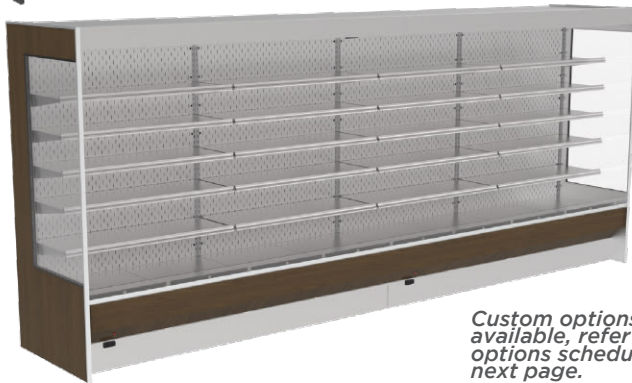

Custom options available, refer to options schedule on next page.

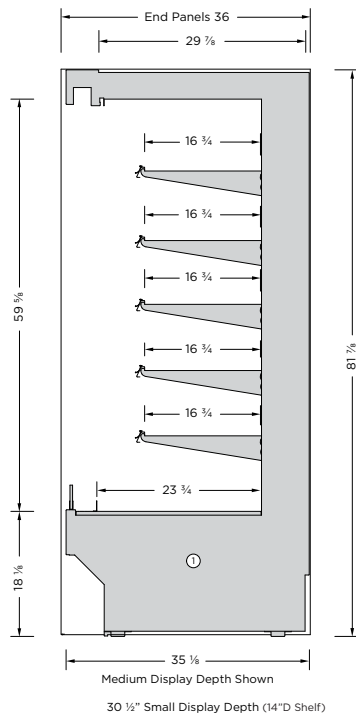


MODEL	LENGTH
SSL-3882-M	36 1/4"
SSL-4882-M	48 1/4"
SSL-6082-M	60 3/8"
SSL-7282-M	72 1/2"
SSL-9682-M	96 1/2"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Two display depths available, refer to the dimensioned illustration. ①
- Remote refrigeration option only for this display profile.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- Medium display depth: 5-16" (Small display depth: 5-14") adjustable metal shelves with integrated front product stop.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



SIX LEVEL 82"H UPRIGHT MEDIUM DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION

SSL - UPRIGHT SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
SSL-3882-M	36 ¼"	115	1.4	NEMA 5-15P	4870	20F
SSL-4882-M	48 ¼"	115	1.4	NEMA 5-15P	5975	20F
SSL-6082-M	60 ¾"	115	1.4	NEMA 5-15P	7170	20F
SSL-7282-M	72 ½"	115	1.9	NEMA 5-15P	9560	20F
SSL-9682-M	96 ½"	115	2.1	NEMA 5-15P	11950	20F

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 34 ½" or small display depth 30 ½".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 5" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 4-16" adjustable metal shelves with integrated front product stop.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Thermal glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	



FOUR LEVEL 60"H UPRIGHT MEDIUM DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION

ISSL - UPRIGHT SELF-SERVICE DISPLAY



REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

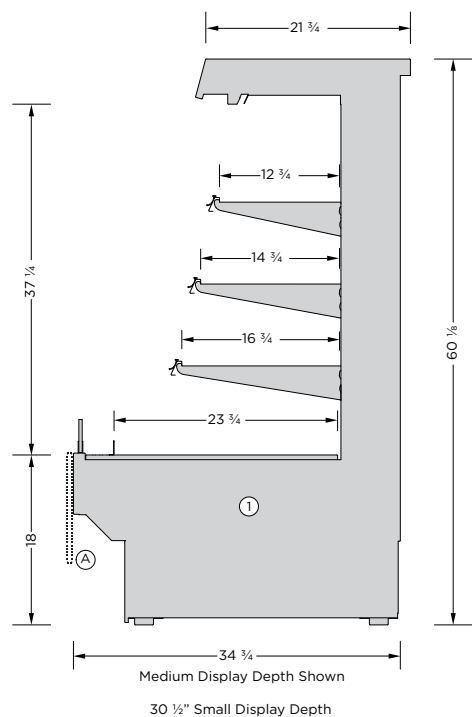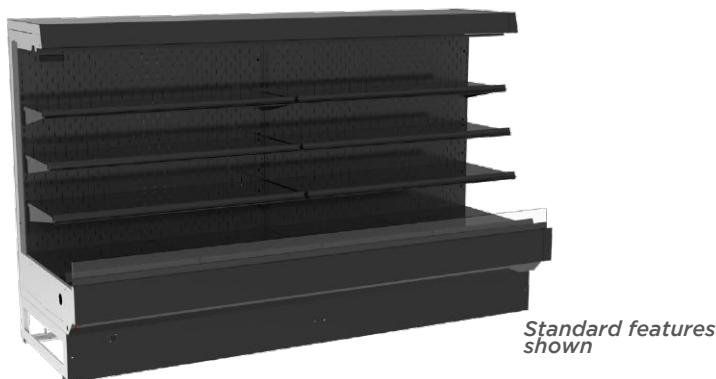


MODEL	LENGTH
ISSL-3660-MR	36 1/4"
ISSL-4860-MR	48 1/4"
ISSL-6060-MR	60 3/8"
ISSL-7260-MR	72 1/2"
ISSL-9660-MR	96 1/2"

FEATURES:

- Two display depths available, refer to the dimensioned illustration. ①
- Create single, back to back or island configurations.
- Remote refrigeration option only for this display profile.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- Medium display depth: 1-12", 1-14" and 1-16" (Small display depth: 1-10", 1-12" and 1-14") adjustable metal shelves with integrated front product stop.
- Front base décor panel options provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.

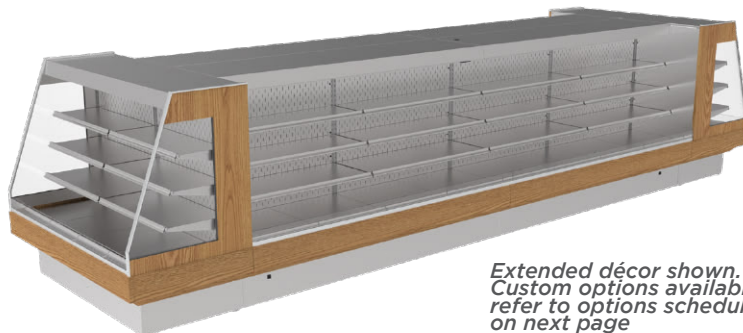



FOUR LEVEL 60"H UPRIGHT MEDIUM DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION

ISSL - UPRIGHT SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
ISSL-3660-MR	36 ¼"	115	1.4	NEMA 5-15P	3800	20F
ISSL-4860-MR	48 ¼"	115	1.4	NEMA 5-15P	4500	20F
ISSL-6060-MR	60 ¾"	115	1.4	NEMA 5-15P	5225	20F
ISSL-7260-MR	72 ½"	115	1.9	NEMA 5-15P	6855	20F
ISSL-9660-MR	96 ½"	115	2.1	NEMA 5-15P	8440	20F

Length does not include end panels. Add 1" per panel.

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 34 ½" or small display depth 30 ½".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 5" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-12", 1-14" and 1-16" adjustable metal shelves with integrated front product stop.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
10 ⅛"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS	
The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Thermal glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	

ADDITIONAL FEATURES:


- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

FOUR LEVEL 60”H UPRIGHT MEDIUM DEPTH SELF-SERVICE END CAP DISPLAY - REMOTE REFRIGERATION

ISSL - UPRIGHT SELF-SERVICE DISPLAY

 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

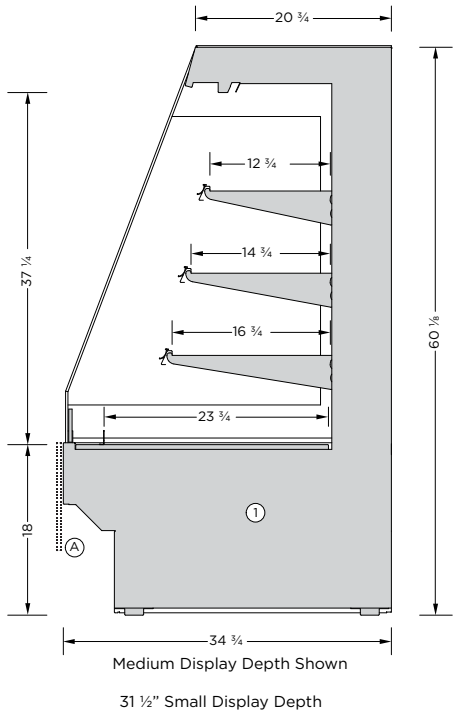

MODEL	LENGTH
ISSL-4860-E-MR	62"
ISSL-6060-E-MR	74 1/8"

FEATURES:

- Two display depths available, refer to the dimensioned illustration.
- End cap displays are designed to cap the end/ends island line-up configurations. They can also be used as stand-alone displays.
- Integrated end panels with thermal glass panes.
- Remote refrigeration option only for this display profile.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- Medium display depth: 1-12", 1-14" and 1-16" (Small display depth: 1-10", 1-12" and 1-14") adjustable metal shelves with integrated front product stop.
- Front base décor panel options provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.





FOUR LEVEL 60"H UPRIGHT MEDIUM DEPTH SELF-SERVICE END CAP DISPLAY - REMOTE REFRIGERATION

ISSL - UPRIGHT SELF-SERVICE DISPLAY



TECHNICAL SPECS (REMOTE REFRIGERATION)							
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION	NOTE
ISSL-4860-E-MR	62"	115	1.4	NEMA 5-15P	5225	20F	Designed to cap the small display depth cases
ISSL-6060-E-MR	74 1/8"	115	1.4	NEMA 5-15P	6855	20F	Designed to cap the small & medium display depth cases

Length does not include end panels. Add 1" per panel.

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 34 1/2" or small display depth 31 1/2".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 5" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-12", 1-14" and 1-16" adjustable metal shelves with integrated front product stop.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
10 1/8"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS	
The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Thermal glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 1/2"D 3 Tier stepped riser	
4"H x 5 1/4"D 4 Tier stepped riser	
2 1/2"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

THREE LEVEL 54”H UPRIGHT SMALL DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION


ISSL - UPRIGHT SELF-SERVICE DISPLAY



CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS



Standard features shown

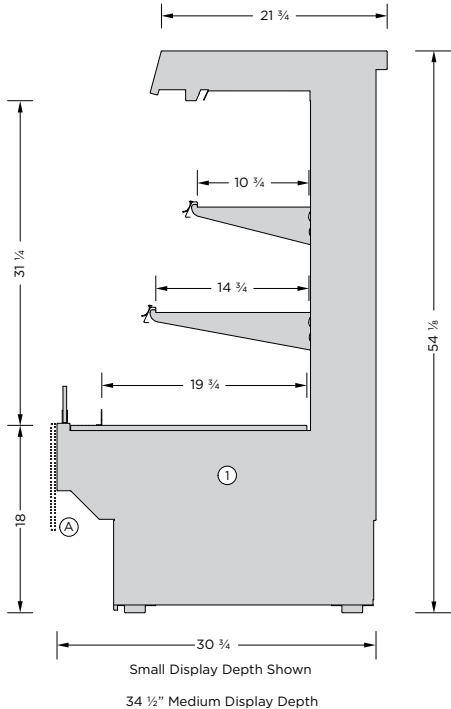

MODEL	LENGTH
ISSL-3654-SR	36 1/4"
ISSL-4854-SR	48 1/4"
ISSL-6054-SR	60 3/8"
ISSL-7254-SR	72 1/2"
ISSL-9654-SR	96 1/2"

FEATURES:

- Two display depths available, refer to the dimensioned illustration. ①
- Create single, back to back or island configurations.
- Remote refrigeration option only for this display profile.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- Small display depth: 1-10" and 1-14" (Medium display depth: 1-12" and 1-16") adjustable metal shelves with integrated front product stop.
- Front base décor panel options (A) provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



Custom options available, refer to options schedule on next page



THREE LEVEL 54"H UPRIGHT SMALL DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION

ISSL - UPRIGHT SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
ISSL-3654-SR	36 ¼"	115	1.4	HARDWIRE	3800	20F
ISSL-4854-SR	48 ¼"	115	1.4	HARDWIRE	4500	20F
ISSL-6054-SR	60 ¾"	115	1.4	HARDWIRE	5225	20F
ISSL-7254-SR	72 ½"	115	1.9	HARDWIRE	6855	20F
ISSL-9654-SR	96 ½"	115	2.1	HARDWIRE	8440	20F

Length does not include end panels. Add 1" per panel.

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 34 ½" or small display depth 30 ¾".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 5" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-10" and 1-14" adjustable metal shelves with integrated front product stop.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
10 ⅛"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS	
The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored stainless steel interior	
Thermal glass	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS	
Additional metal 12" shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 ½"D 3 Tier stepped riser	
4"H x 5 ¼"D 4 Tier stepped riser	
2 ½"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	

ADDITIONAL FEATURES:


- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

THREE LEVEL 54”H UPRIGHT SMALL DEPTH SELF-SERVICE END CAP DISPLAY - REMOTE REFRIGERATION

ISSL - UPRIGHT SELF-SERVICE DISPLAY

 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

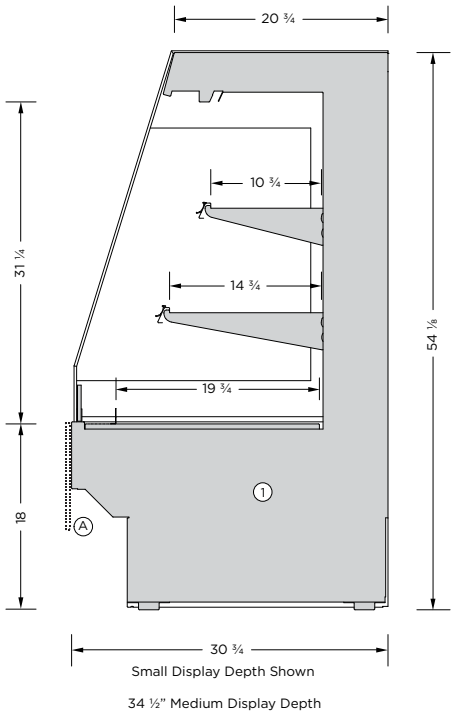

MODEL	LENGTH
ISSL-4854-E-SR	62"
ISSL-6054-E-SR	74 1/8"

- FEATURES:**
- Two display depths available, refer to the dimensioned illustration. ①
 - End cap displays are designed to cap the end/ends island line-up configurations. They can also be used as stand-alone displays.
 - Integrated end panels with thermal glass.
 - Remote refrigeration option only for this display profile.
 - Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
 - Three interior finish options, textured powdercoat black, white or brushed stainless steel.
 - LED light strips are mounted on the top ledge of the display area and under each shelf level.
 - The LED lighting is available in various light intensities/spectrums.
 - Small display depth: 1-10" and 1-14" (Medium display depth: 1-12" and 1-16") adjustable metal shelves with integrated front product stop.
 - Front base décor panel options Ⓐ provide a more customized look.
 - Many display options offered. Refer to the options schedules on the next page.
 - Engineered for serviceability and flexibility.
 - Removeable base deck panels for easy cleaning and service.
 - ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.





THREE LEVEL 54"H UPRIGHT SMALL DEPTH SELF-SERVICE END CAP DISPLAY - REMOTE REFRIGERATION

ISSL - UPRIGHT SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)							
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION	NOTE
ISSL-4854-E-MR	62"	115	1.4	NEMA 5-15P	5225	20F	Designed to cap the small display depth cases
ISSL-6054-E-MR	74 1/8"	115	1.4	NEMA 5-15P	6855	20F	Designed to cap the small & medium display depth cases

Length does not include end panels. Add 1" per panel.

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 34 1/2" or small display depth 30 3/4".
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 5" vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-10" and 1-14" adjustable metal shelves with integrated front product stop.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
10 1/8"H extended front décor panel	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Thermal glass pane	
1" black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4"H x 6 1/2"D 3 Tier stepped riser	
4"H x 5 1/4"D 4 Tier stepped riser	
2 1/2"H x 13"D Single step riser	
4"H x 9"D Single step riser	
Clip-in angled base inlay	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

HOW TO CALCULATE LENGTH OF LINE-UP

Available Showcase Section Lengths (Without End Panels)			
Nominal Length (Feet)	Nominal Length (Inches)	Actual Length (Fractional)	Actual Length (Decimal)
3'	38"	38 $\frac{1}{4}$ "	38.250"
4'	48"	47 $\frac{7}{8}$ "	47.875"
5'	57"	57 $\frac{3}{8}$ "	57.375"
6'	76"	76 $\frac{1}{2}$ "	76.500"
8'	96"	95 $\frac{5}{8}$ "	95.625"

Procedure:

1. Take total desired length of line-up in feet and divide by eight.
2. Split resulting number into two parts; the whole number and the decimal number.
3. The whole number represents the number of eight-foot sections.
4. The decimal number needs to be multiplied by eight to determine the nominal length of the final section.

Example:


1. Desired length is 27ft;

$$27 \div 8 = 3.375$$
2. Whole number is 3 and decimal number is 0.375.
3. The 3 represents the number of eight-foot sections.
4. The decimal number of 0.375 multiplied by eight is used to determine the final section length (in this example it is a three-foot section).

$$0.375 \times 8 = 3$$




⇓ BROKEN DOWN INTO SECTIONS ⇓

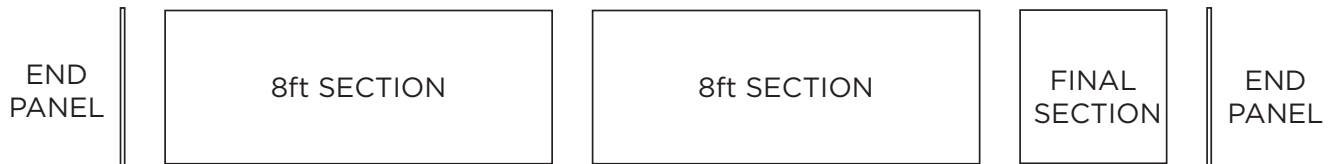

In general, most line-ups can be broken down into 8ft sections with a single final section making up the remaining length desired as shown in the figure above. The line-up is then completed with a 1" thick end panel on each end. The chart on the page before can be used to calculate the actual length of the line-up.

Note:

This is a guideline, exact configuration and final length will need to be determined by engineering.

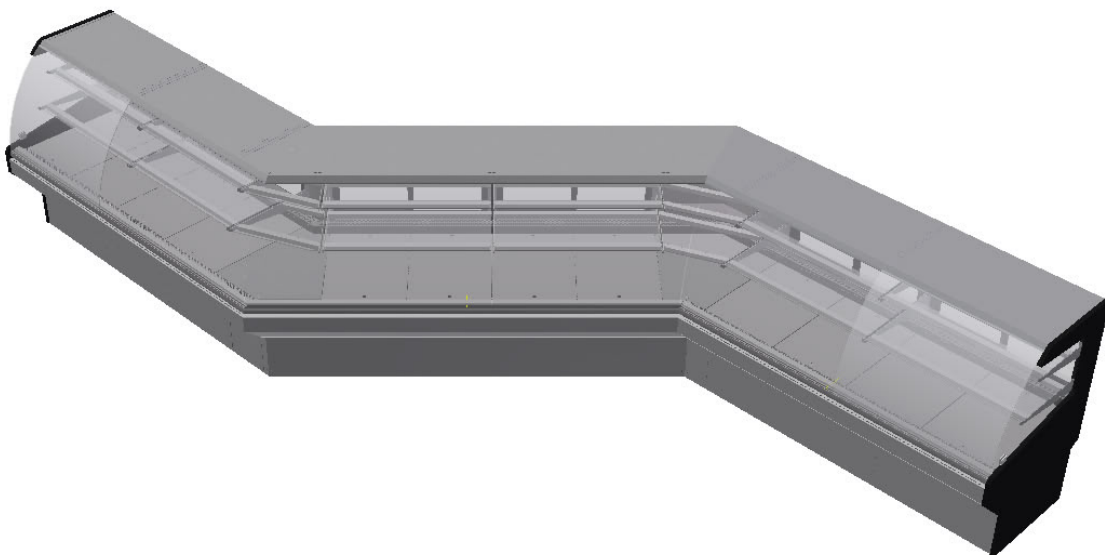

ACTUAL CASE LENGTH CALCULATION OF LINE-UP

To determine the actual length of the line-up:


1. Take the whole number from the procedure mentioned on the previous page and multiply it by the **actual length (decimal)** of an 8ft section.
2. Take the final section length value from the procedure mentioned on the previous page and determine the **actual length (decimal)** of the section.
3. Add 2 inches to actual length value to represent an end panel on each end.
4. Divide the final value obtained in the above step by 12 to determine the length of the line-up in feet.

Example:


1. Whole number in the previous example was 3; actual length of three 8ft sections is
$$3 \times 96.625 = 286.875$$
2. Final section length in the previous example was a 3ft section; actual length of final section is 38.25
3. $286.875 + 38.25 = 325.125$ inches
4. $325.125 + 2 = 327.125$ inches
5. $327.125 \div 12 = 27.26$ feet.

Total **actual** length of the lineup is 27.26ft (or 27 ft 3 1/8 in)


CASE DEPTHS

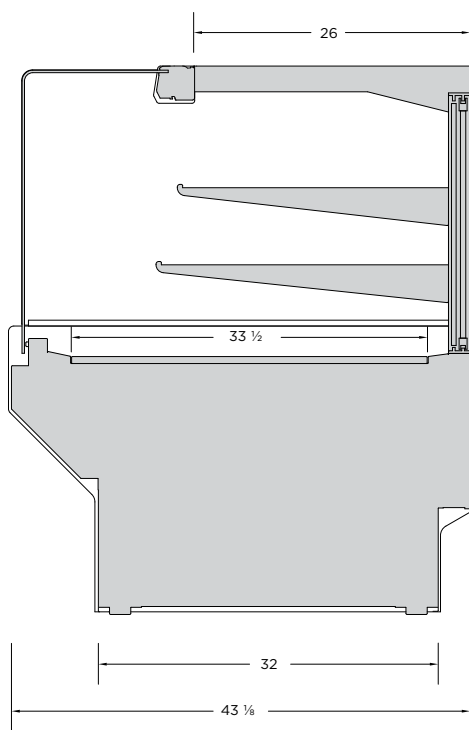

Large Frame Depth

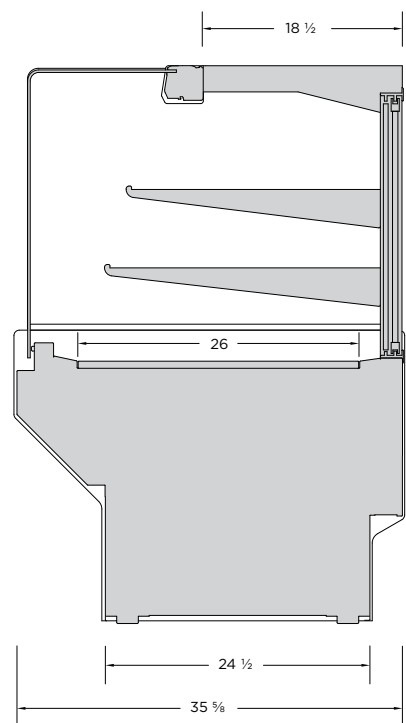

Medium Frame Depth

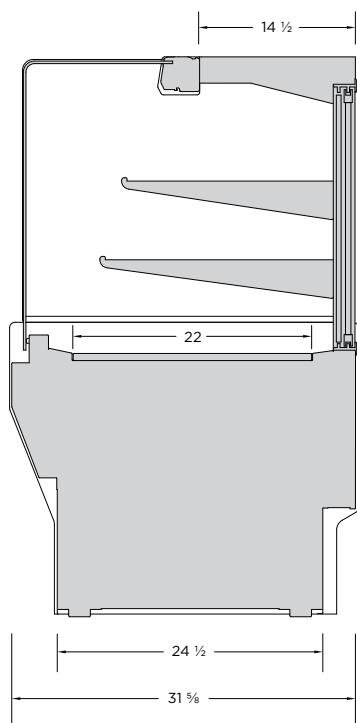


Small Frame Depth

SHOWCASE CONSTRUCTION

- Concept: sheet metal construction creates a strong, rigid, high-quality showcase that allows for easy customization when required
- Full-length accessible wire way allows for easy wiring & component replacement
- Standardized design of framework allows for wide variety of exterior and interior materials/finishes
- Sled-runner base and adjustable struts make installation and alignment easy
- Easy-to-access areas for electrical, plumbing and refrigeration installation

LIFT-UP GLASS

Glass Front Closed

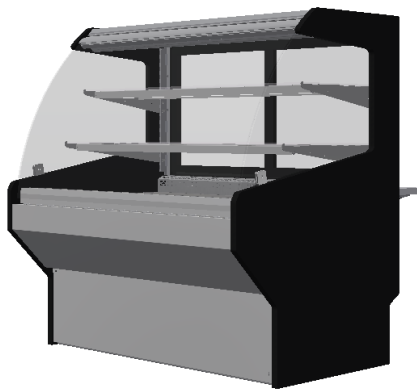

Glass Front Open



Positive



- Easier to gain access to clean and perform maintenance inside case
- Easier to load product into the front of case
- Easier access to adjust shelves

Negative


- More expensive
- Safety issues - chance of hitting head on glass
- Increase in maintenance of parts

GLASS PROFILES



DC~ Double Curve

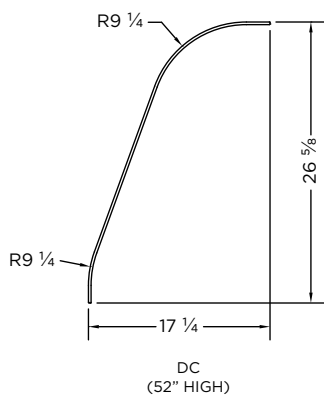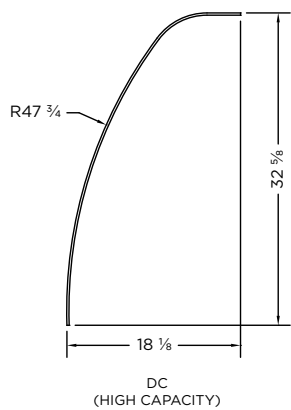


SC~ Single Curve

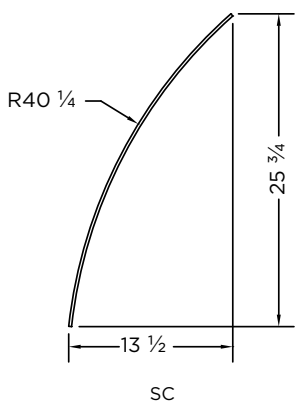

SQ~ Square

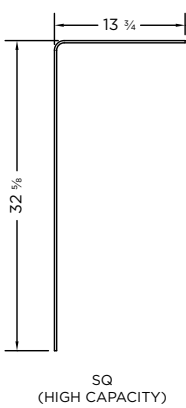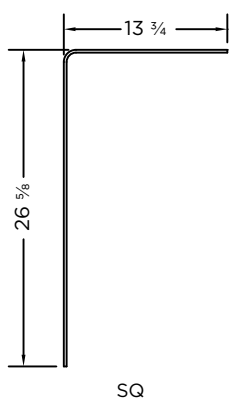

FL~ Flat

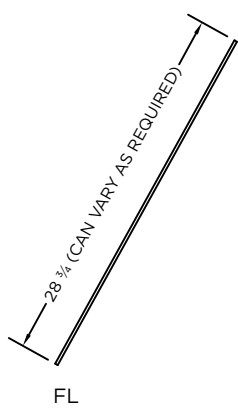

SQUARE GLASS DESIGN. WHY OURS IS BETTER

- Concept: single-piece square glass design creates sharp appearance showcase with increased product capacity
- Single piece design reduces complexity and cost
- Tight bend radius has very little effect on sightlines
- Available in tilt-out or lift-up operation
- Square glass profile allows for ~15% increase in product capacity (vs. other glass setups)
- Vertical front panel of glass allows for product to be displayed up to 6" closer to customer (vs. other glass setups)
- Cost effective
- Less complex = less maintenance
- Less glass alignment issues
- Better presentation of product
- No glass chipping
- Cleaner look
- Less bulky hardware = better visibility
- No sagging/
breaking hardware



FRONT DECOR PANEL STYLES



Standard 4" Decor Panel



Standard 11 1/2" Decor Panel




Extended Decor Panel

EXTERIOR FINISHES

Laminate



Textured Painted Metal

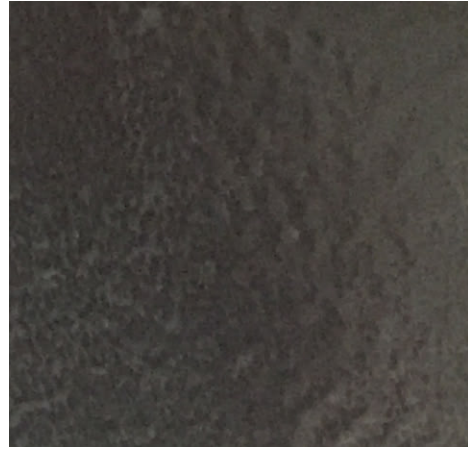

Vinyl



Wood



Stainless Steel




Wood Panel



ADJUSTABILITY OF THE CASES

Our unique strut system is designed to allow you to slightly adjust the angle at which the front glass, shelves and top

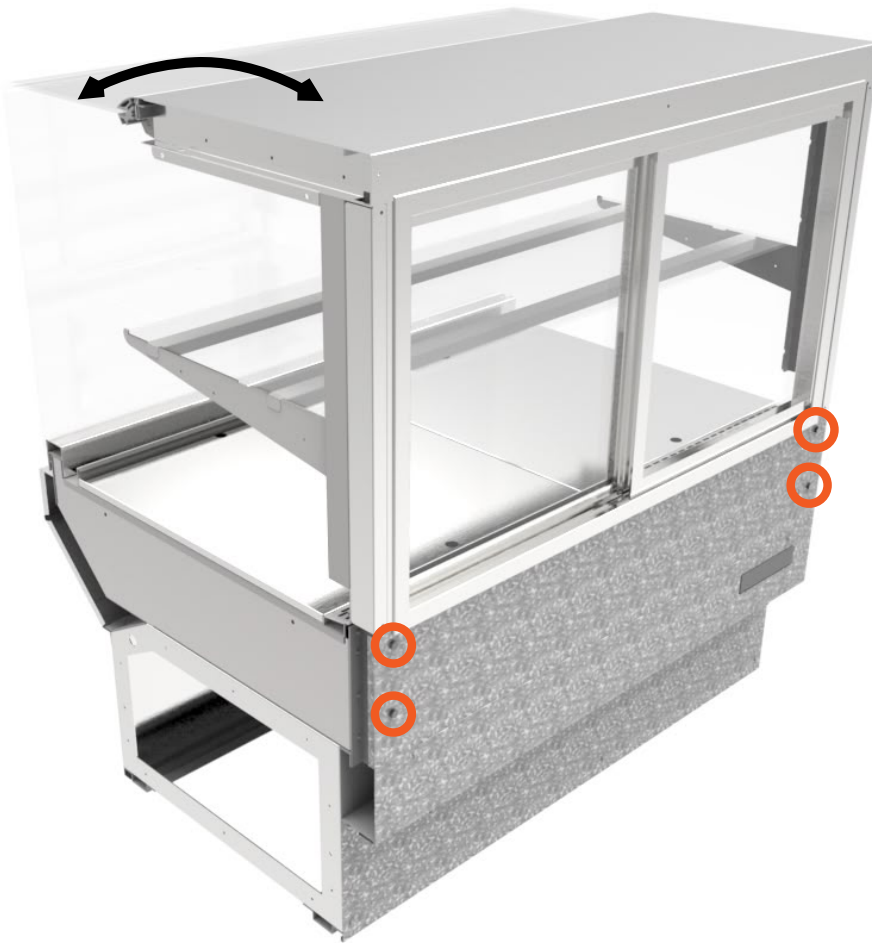


deck (typically metal or glass) sit. Adjusting the two bolts (circled in red in the image above) located at the rear of the unit on either end of a case section will allow the strut system to be tilted forward and down or back and up as indicated by the black arrow. This will allow you

to level and line up your front glass and shelves to help create the look of a seamless case and to better help showcase your product.

COLD AND SLOW REFRIGERATION TECHNOLOGY

- Concept: move more air, more slowly
- Evaporator coils are multi circuit with staggered tubes and ripple fins for improved cooling and efficiency (Heresite dipping available)
- Back of speed-controlled small fans lifts air to let it drop naturally instead of high-speed air rotation
- TEV's allow the showcase to operated efficiently over a range of temperatures for more flexibility
- Gets to temp faster
- More even distribution
- Better energy efficiency

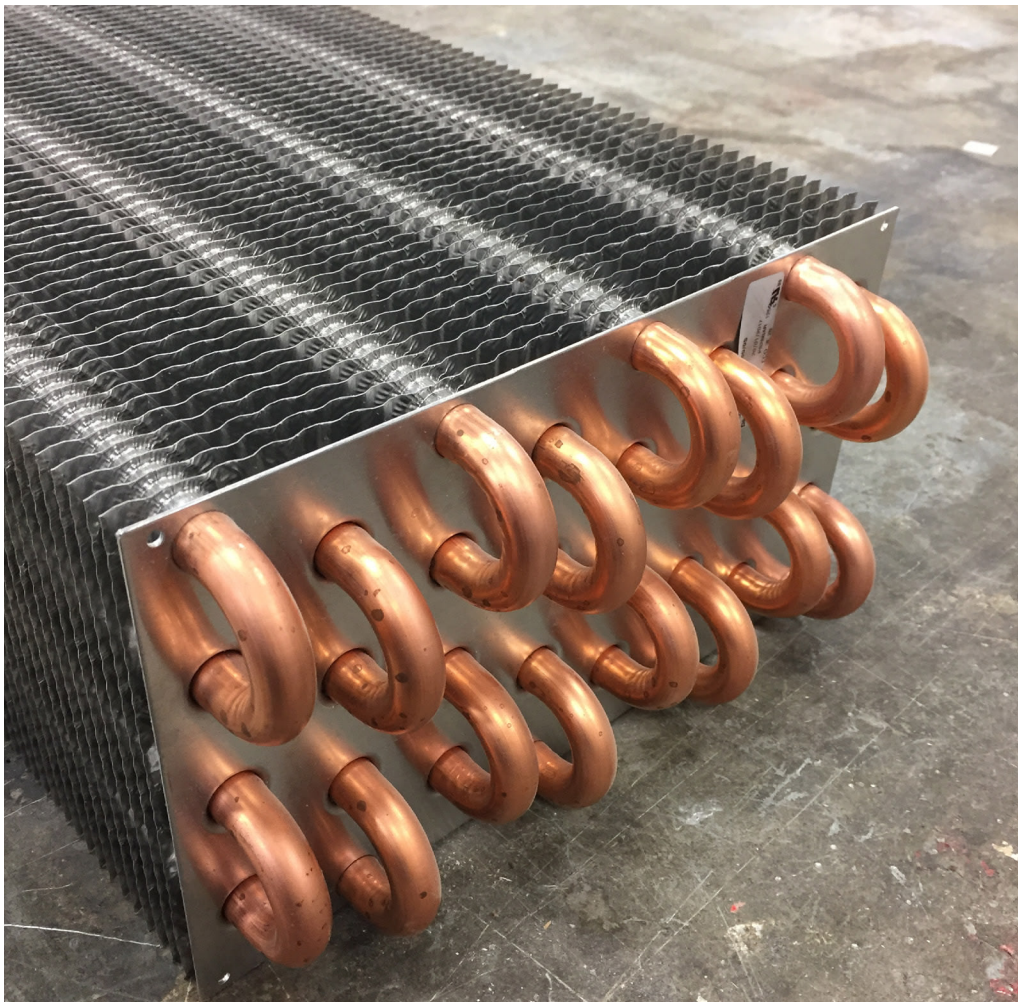

SERVICEABILITY



Electrical Raceway



LED LIGHTING

	LIGHT TYPE (KELVIN/COLOUR RENDERING INDEX)		
	STANDARD LIGHTS/NATURAL WHITE LIGHTS (4100K, 94+ CRI)	MEAT SPECIAL LIGHTS (4100K, 91 CRI) W/ RED-LIGHT DIODES	GOLDEN WARM WHITE LIGHTS (3500K, 94 CRI)
	Recommended for the enhancement of natural hues of products	Recommended for the enhancement of red & pink hues without compromising the other colours	Recommended for products that contain brown & yellow hues
FRESH MEAT		X	
DELI		X	
SEAFOOD	X	X	
OLIVE BAR	X	X	
SALAD BARS	X	X	
PREPARED FOODS	X	X	
HOT BARS - FRIED FOODS			X
HOT BARS - PREPARED FOODS	X		
FRESH PRODUCE	X		
DAIRY	X		
CAKES	X		
BAKED GOODS/BREADS			X

Kelvin (K)

- A measure of the colour of a light source. Incandescent lights have a low colour temperature of approximately 2200-3000K and are called warm colours (red-yellowish tone). Warm white LED lamps have a colour temperature between 2000-3000K. Lamps related between 3100-4500K are viewed as white and are called cool colours (bluish-white tone), white lamps above 4600-6000K tend to have blue cast.

Colour Rendering Index (CRI)

- CRI is a scale from 0 to 100 percent indicating how accurate a “given” light source is at rendering colour when compared to a “reference” light source. The higher the CRI, the better the colour rendering ability.

THINGS TO CONSIDER

Showcases are designed to display your refrigerated products at 38-41°F (4-5°C). Showcases are designed to perform in environments of maximum 75°F (23°C) and 55% relative humidity.

****NOTE: FOR YOUR SHOWCASE TO FUNCTION AT PEAK EFFICIENCY YOU WILL NEED PROPER CLIMATE CONTROL AND AIR CIRCULATION****

You need to consider the following when selecting a showcase and placing it in your store environment:

1 Consider nearby doorways and vestibules



A location near a doorway will negatively affect the airflow and holding temperature of both open and closed showcases.

2 Consider nearby windows



Direct sunlight will negatively affect the holding temperature of both open and closed showcases.

3 Consider nearby vent sources, hoods, cooking equipment and fans



HVAC ceiling vents, exhaust hoods, cooking equipment (steam heat) and ceiling fans will negatively affect the airflow of open showcases and will create condensation on the showcases if not properly managed.

4 Ensure your display is level and plumb



Ensure your showcase is plumb and level to allow for proper drainage of condensation water.

Please note: These are critical points to ensure the best results for your equipment and efficient space – and the best return on your investment!

Regular Maintenance and Cleaning

Your showcase will work at its peak performance with regular maintenance. Refer to the Owner's Manual for maintenance and cleaning instructions.

To access the Owner's manual either visit us at cayugadisplays.com/resources/manuals or access the QR code located on the electrical box of your case. You can also check out our online maintenance video.



Watch our maintenance videos at <https://cayugadisplays.com/resources/videos>



5 Leave appropriate space behind display



A 6" space is required behind any showcase that is against a wall or has a rear obstruction to allow for proper air flow around your showcase.

6 Clean your condenser grill and pre-filter



Use the included brush to regularly wipe away dust. Too much dust will not allow the refrigeration to work properly and could result in **expensive** damage.

****Refer to Owner's Manual for additional case cleaning checklist****

7 ONLY PRE-CHILLED product in case



Refrigerated displays are designed to **KEEP COLD PRODUCT COLD** - they are not designed to bring warm products down to a cold temperature. For food safety it is always imperative that warm product be properly chilled (using a blast chiller or cold room) prior to storing in the refrigerated display case.

8 Noise



Self-contained cases have compressors, motors and fans and these will make noise. Keeping your showcase serviced and clean will help keep the noise level under control, improve lifespan, and maintain efficiency.

9 Condensation on closed and open cases



Condensation is caused by warm, moist air coming into contact with cool surfaces. If the case environment is not maintained below 75°F/23°C and 55% relative humidity, condensation may occur.

TIPS TO COMBAT CONDENSATION

Showcases are designed to display your refrigerated products at 38-41°F (4-5°C). Showcases are designed to perform efficiently correctly when placed in environmental conditions of maximum 75°F (23°C) and 55% relative humidity.

****NOTE: FOR YOUR SHOWCASE TO FUNCTION AT PEAK EFFICIENCY YOU WILL NEED PROPER CLIMATE CONTROL AND AIR CIRCULATION****

1 Condensation on closed and open cases



Condensation is caused by warm, moist air coming into contact with cool surfaces. If the case environment is not maintained below 75°F/23°C and 55% relative humidity, condensation may occur.

2 Consider nearby doorways and vestibules



A location near a doorway will affect the humidity that encounters your showcase which may cause condensation to occur.

- Relocate showcase away from doorways
- An air-conditioned vestibule will help to mitigate condensation

3 Consider nearby vent sources, hoods, cooking equipment and fans



HVAC ceiling vents, exhaust hoods, cooking equipment (steam heat) and ceiling fans will affect the airflow of open showcases and will create condensation on the showcases if not properly managed.

- Maintain environment below 75°F/23°C and 55% relative humidity
- Turn on air-conditioner and dehumidifier

Please note: These are critical points to ensure the best results for your equipment and efficient space – and the best return on your investment!

Regular Maintenance and Cleaning

Your showcase will work at its peak performance with regular maintenance. Refer to the Owner's Manual for maintenance and cleaning instructions.

To access the Owner's manual either visit us at cayugadisplays.com/resources/manuals or access the QR code located on the electrical box of your case. You can also check out our online maintenance video.



Watch our maintenance videos at <https://cayugadisplays.com/resources/videos>



4 Ambient humidity and temperature



Maintain environmental conditions during working and non-working store hours.

- Consider recirculating your conditioned air instead of bringing in fresh air from outside
- Turn on air-conditioner and dehumidifier
- Keep the A/C on even when it's cool outside as well as overnight
- Schedule regular maintenance for both A/C and dehumidifier as it frees parts and device of dirt, dust and other pollutants that can affect performance


5 Small store footprint



If your space is small, consider adding a dehumidifier.

- Install a dehumidifier with a floor drain to ensure humidity levels remain consistent
- Regular maintenance for dehumidifier is recommended (refer to manufacturers specifications)

6 Air circulation

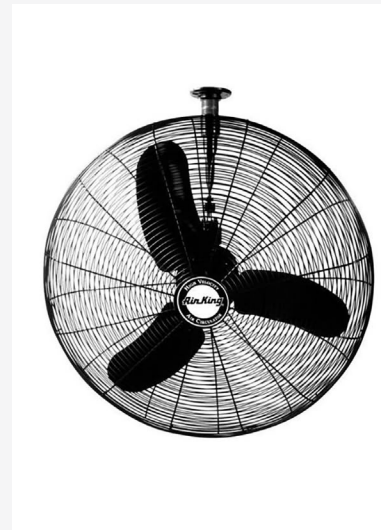

Ceiling fans help to mix dry air near the ceiling with cold moist air at ground level.

- Consider recirculating your conditioned air instead of bringing in fresh air from outside

7 Hot bars with steam wells



Both Soup wells and food bars that rely on steam to heat products produce steam that will raise the moisture levels

- Use dry heat wells
- Turn on dehumidifier to maintain 55% relative humidity



Formica® Laminate

Formica Group provides surfaces that fuse beautiful design with purposeful functionality. Formica® Products provide versatile surfacing solutions that are inspired by and adapt to the way people live, work and play.

Formica® Brand Laminate offers a broader range of looks than ever before. Transform spaces with our modern laminates that are as beautiful as they are durable. Mix and match solids, patterns and finishes.


Product Features:

- Postforming
- Durable and Wear-resistant
- Horizontal and Vertical
- Impact Resistant


Formica® EliteForm

Our innovative Formica® EliteForm surfacing technology redefines the performance attributes of high pressure laminate to deliver a more durable laminate for today's market. Formica® Laminate with EliteForm features superior scratch resistance over other laminate brands, the ability to postform to a smaller radius with better blister resistance, and more durable, long-lasting surfaces, including the Gloss texture in horizontal applications. EliteForm comes standard on all Formica® Laminates, at no additional cost.


Price Group One: All Colours are matte (-58) finish




949
White



7197
Dover White



920
Almond



927
Folkstone



961
Fog



845
Spectrum Red




7897
Spectrum Green



914
Marine Blue




2297
Terril




909
Black



6696
Carrara Bianco



9476
White Ice Granite




9497
Silver Quartzite



7732
Butterum Granite



9527
Black Shalestone



8844
Aged Ash



5883
Pecan Woodline



5884
Chestnut Woodline



9283
Walnut Riftwood



6414
Black Riftwood

Price Group Two: All Colours are matte finish



6997
Pale Brushstroke



6998
Wood Brushstroke



7813
Cardboard Solidz




9319
Stainless




8918
Blackened Steel



9310
White Marble Herringbone



9285
White Twill



6698
Paloma Pear




503
Stone Grafix




8830
Elemental Concrete



8841
White Ash




5785
Ashwood Beige



5795
Camel Elm



8845
Bleached Legno




8916
Blackened Fiberwood




86992
Hardrock Maple




7012
Amber Maple



8677
Scandi Rift Oak



6995
Cherry Walnut



7759
Select Cherry



Formica Canada Inc. is located in St-jean-sur-Richelieu, Quebec, and employs more than 250 people.

Formica Canada is proud to be part of the Well Made Here local purchasing program.

As the inventor of high pressure laminate, Formica Corporation has always worked to provide innovative, high quality products. Efficient use of resources is at our core, and we have taken many steps to improve our environmental footprint - from reusing the water in our presses to incorporating recycled materials into our surfacing products. We are committed to a long-term planning horizon that includes becoming an industry-leading environmental steward.



For larger laminate sample, please visit:
cayugadisplays.com 1-800-839-5536
formica.com 1-800-FORMICA™




For larger laminate samples visit www.wilsonart.com/commercial/laminates/designs

PAINTED METAL

- **Standard products in stock**
- **RAL Program** colours not listed are also available upon request
- **Non-RAL Program** colours have long lead times and could affect deliver date

CAYUGA STOCK COLOURS



Cayuga Black



Cayuga White


Cayuga black and white colours come in a textured finish.

Matte finish is available upon request.


RAL STOCK COLOURS



Traffic Blue
Ral 5017



Cream
Ral 9001



Pure White
Ral 9010



Traffic Orange
Ral 2009



Pebble Grey
Ral 7032



Basalt Grey
Ral 7012



Traffic Grey
Ral 7042




Quartz Grey
Ral 7039




Traffic Red
Ral 3020

WOOD STAINS


CAYUGA STANDARD WOOD GRAINS




Oiled Cherry
Match to Pionite/Panolam
WC421 (Oiled Cherry)



Wild Cherry
Match to Formica 5904-43
(Wild Cherry)



Select Cherry
Match to Formica 7759
(Select Cherry)




Choco Cherry
Match to Panval/Uniboard
207 (Choco Cherry)




Natural Maple
Match to Formica 86992-58
(Hardrock Maple)




Pearwood
Match to Pionite/Panolam
WX031 (Pearwood)




Weathered Wood
Match to Formica 8909-NF
(Cascara Teakwood)



Concerto
Match to Arborite T485/
Tafisa L485 (Concerto)




Danish Walnut
Match to Arborite W305
(Parliament Walnut)



Witchcraft
Match to Pionite/Panolam
WX421 (Witchcraft)



Iron Mountain
Match to Formica 912-58
(Storm)



Baloil
Match to Formica 6414 NG
(Black Riftwood)

Refer to physical swatches for a true representation of colors, above images may appear slightly different than actual samples.

HOW TO ORDER

We'll help you select the right case for your requirements.
The steps below will help us to serve you best.

- 1 Choose the showcase that meets your display requirements from the product specification sheets.
- 2 Review the options table found on the specification sheet and make your selections of the options provided.
- 3 Select from the large pallet of colours found on the last five pages of the brochure, or choose a stainless steel, standard black or white for the exterior finish of your showcase.
- 4 E-mail your request for a quote to your Cayuga sales representative or sales@cayugadisplays.com and we will quickly respond to your request. Please include your full contact information in case we have any questions.

Contact the inside sales team

Cayuga Displays

E: sales@cayugadisplays.com

T: 1-800-839-5536



T: 800.839.5536

E: sales@cayugadisplays.com

A: 70 Talbot St E, PO Box 130
Cayuga, ON N0A 1E0

