24” FRONT HEIGHT WITH A 42” & 48” REAR HEIGHT

BSD - BAKERY SINGLE LEVEL SELF-SERVICE DISPLAY

REFRIGERATED


CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown





Custom options available, refer to options schedule on next page.

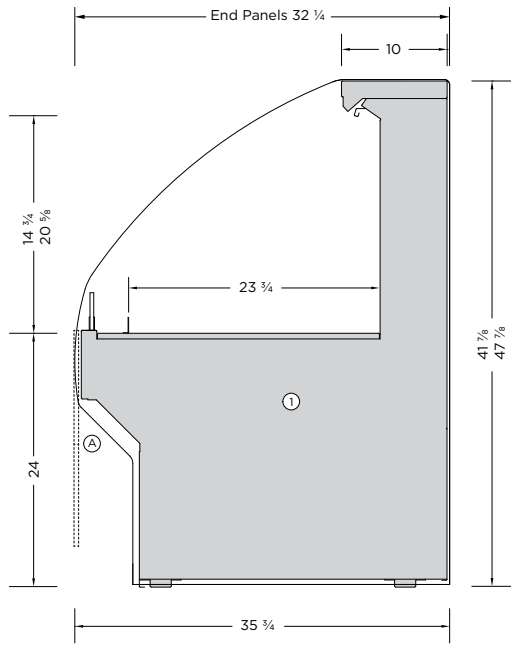

Medium Case Depth Shown
31 ¾ Small Case Depth
43 ¾ Large Case Depth


MODEL	LENGTH
BSDN-3642-M	36 ¼”
BSDN-4842-M	48 ¼”
BSDN-6042-M	60 ⅜”
BSDN-7242-M	72 ½”
BSDN-9642-M	96 ½”
BSDN-3648-M	36 ¼”
BSDN-4848-M	48 ¼”
BSDN-6048-M	60 ⅜”
BSDN-7248-M	72 ½”
BSDN-9248-M	96 ½”

Length does not include end panels. Add 1” per panel.

FEATURES:

- Three display depths available, refer to the dimensioned illustration. (1)
- Remote or self-contained refrigeration system options.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display.
- The LED lighting is available in various light intensities/spectrums.
- 1 ½” front product stop integrated to the base inlays.
- Front base décor panel options (A) provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



24” FRONT HEIGHT WITH A 42” & 48” REAR HEIGHT

BSD - BAKERY SINGLE LEVEL SELF-SERVICE DISPLAY

REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
BSDN-3642-M	36 ¼”	115	1.2	NEMA 5-15P	2794	20F
BSDN-3648-M					2870	
BSDN-4842-M	48 ¼”	115	1.4	NEMA 5-15P	3719	20F
BSDN-4848-M					3820	
BSDN-6042-M	60 ⅜”	115	1.4	NEMA 5-15P	4654	20F
BSDN-6048-M					4780	
BSDN-7242-M	72 ½”	115	1.4	NEMA 5-15P	5589	20F
BSDN-7248-M					5740	
BSDN-9642-M	96 ½”	115	1.6	NEMA 5-15P	7439	20F
BSDN-9248-M					7640	

TECHNICAL SPECS FOR SELF-CONTAINED REFRIGERATION AVAILABLE UPON REQUEST

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 ⅝”.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 4” vertical flat panel.
- LED light strips are mounted on the top ledge of the display area.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
11 ½”H extended front décor panel	
18”H extended front décor panel	
1” black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

END PANELS	
The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Tempered glass pane	
Mirrored tempered glass pane	
1” black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS	
Small display depth 31 ¾”	
Large display depth 43 ¼”	
Top mounted roll-down thermal night curtain	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
2 ½”H x 13”D Single step riser	
4”H x 9”D Single step riser	
4”H x 6 ½”D 3 Tier stepped riser	
Clip-in angled base inlay	
Top mounted clip-on dry shelves	
Clip-on sign panels	
Self-contained refrigeration with the new R-513A (non-ozone depleting, low global warming potential) refrigerant	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.