

FOUR LEVEL 60" H UPRIGHT MEDIUM DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION


ISSL - UPRIGHT SELF-SERVICE DISPLAY

 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS



Standard features shown

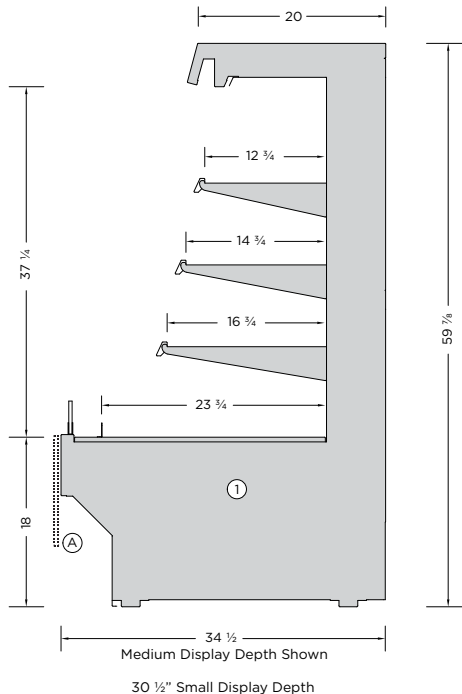


MODEL	LENGTH
ISSL-3660-MR	36 1/4"
ISSL-4860-MR	48 1/4"
ISSL-6060-MR	60 3/8"
ISSL-7260-MR	72 1/2"
ISSL-9660-MR	96 1/2"

FEATURES:

- Two display depths available, refer to the dimensioned illustration. ①
- Create single, back to back or island configurations.
- Remote refrigeration option only for this display profile.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- Medium display depth: 1-12", 1-14" and 1-16" (Small display depth: 1-10", 1-12" and 1-14") adjustable metal shelves with integrated front product stop.
- Front base décor panel options (A) provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.

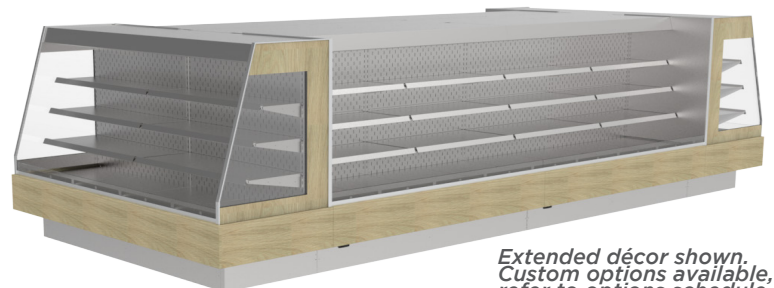

Extended décor shown. Custom options available, refer to options schedule on next page



FOUR LEVEL 60”H UPRIGHT MEDIUM DEPTH SELF-SERVICE DISPLAY - REMOTE REFRIGERATION

ISSL - UPRIGHT SELF-SERVICE DISPLAY

REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION
ISSL-3660-MR	36 ¼”	115	1.4	NEMA 5-15P	3800	20F
ISSL-4860-MR	48 ¼”	115	1.4	NEMA 5-15P	4500	20F
ISSL-6060-MR	60 ¾”	115	1.4	NEMA 5-15P	5225	20F
ISSL-7260-MR	72 ½”	115	1.9	NEMA 5-15P	6855	20F
ISSL-9660-MR	96 ½”	115	2.1	NEMA 5-15P	8440	20F

Length does not include end panels. Add 1” per panel.

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 34 ½” or small display depth 30 ½”.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 5” vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 1-12”, 1-14” and 1-16” adjustable metal shelves with integrated front product stop.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
10 ⅛”H extended front décor panel	
1” black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

END PANELS	
The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Thermal glass pane	
1” black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS	
Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4”H x 6 ½”D 3 Tier stepped riser	
4”H x 5 ¼”D 4 Tier stepped riser	
2 ½”H x 13”D Single step riser	
4”H x 9”D Single step riser	
Clip-in angled base inlay	

FOUR LEVEL 60”H UPRIGHT MEDIUM DEPTH SELF-SERVICE END CAP DISPLAY - REMOTE REFRIGERATION


ISSL - UPRIGHT SELF-SERVICE DISPLAY

 REFRIGERATED

CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS



Standard features shown

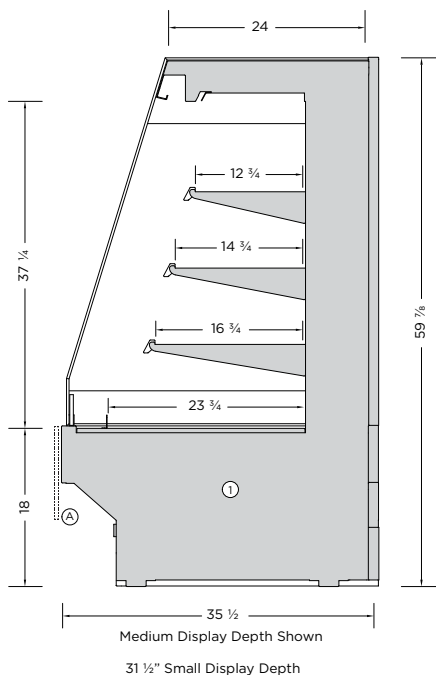


MODEL	LENGTH
ISSL-4860-E-MR	62"
ISSL-6060-E-MR	74 1/8"

FEATURES:

- Two display depths available, refer to the dimensioned illustration. ①
- End cap displays are designed to cap the end/ends island line-up configurations. They can also be used as stand-alone displays.
- Integrated end panels with thermal glass panes.
- Remote refrigeration option only for this display profile.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- Medium display depth: 1-12", 1-14" and 1-16" (Small display depth: 1-10", 1-12" and 1-14") adjustable metal shelves with integrated front product stop.
- Front base décor panel options ② provide a more customized look.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.

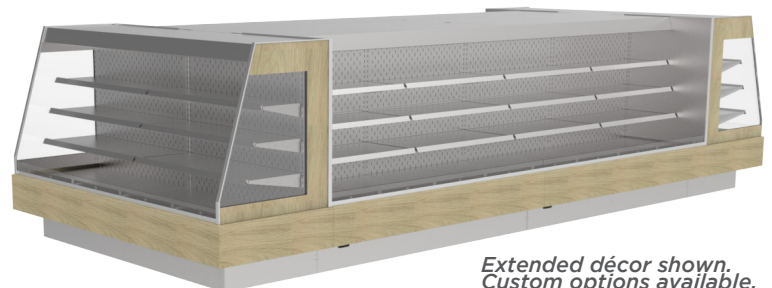

Extended décor shown. Custom options available, refer to options schedule on next page



FOUR LEVEL 60”H UPRIGHT MEDIUM DEPTH SELF-SERVICE END CAP DISPLAY - REMOTE REFRIGERATION

ISSL - UPRIGHT SELF-SERVICE DISPLAY

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)							
MODEL	LENGTH	VOLTS	AMPS	PLUG	BUTH	SUCTION	NOTE
ISSL-4860-E-MR	62”	115	1.4	NEMA 5-15P	5225	20F	Designed to cap the small display depth cases
ISSL-6060-E-MR	74 1/8”	115	1.4	NEMA 5-15P	6855	20F	Designed to cap the small & medium display depth cases

Length does not include end panels. Add 1” per panel.

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 35 1/2” or small display depth 31 1/2”.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 5” vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- • 1-12”, 1-14” and 1-16” adjustable metal shelves with integrated front product stop.

CUSTOM FEATURES:

EXTERIOR FINISHES	
Formica laminate finish: _____	
Other laminate finish (specify): _____	
Brushed Stainless Steel	
Oak Veneer Plywood	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
- Horizontal grain direction	
- Clear Finish	
- Stain Finish	
10 1/8”H extended front décor panel	
1” black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper sizes and colors available	

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1-year parts and labor warranty.

END PANELS

The same interior/exterior laminate	
Brushed stainless steel interior	
Mirrored laminate interior	
Thermal glass pane	
1” black McCue impact bumper strip applied to the end panel	
Other McCue impact bumper sizes and colors available	

MISCELLANEOUS

Additional metal shelf with integrated LED lighting	
Aluminum or painted price tag mould attached to the front of the shelves	
Plastic price stripping attached to the front of the shelves	
4”H x 6 1/2”D 3 Tier stepped riser	
4”H x 5 1/4”D 4 Tier stepped riser	
2 1/2”H x 13”D Single step riser	
4”H x 9”D Single step riser	
Clip-in angled base inlay	