


SSL - UPRIGHT SELF SERVICE DISPLAY

FIVE LEVEL 76”H UPRIGHT MEDIUM DEPTH SELF SERVICE DISPLAY - REMOTE REFRIGERATION




CREATE A DISPLAY LINE-UP OF ALMOST ANY LENGTH WITH A COMBINATION OF STANDARD DISPLAY LENGTHS

Standard features shown

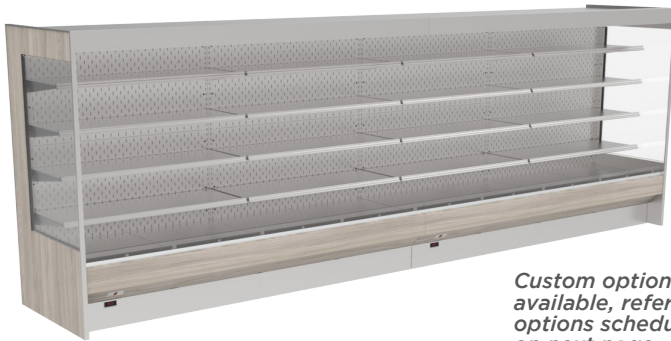

Custom options available, refer to options schedule on next page

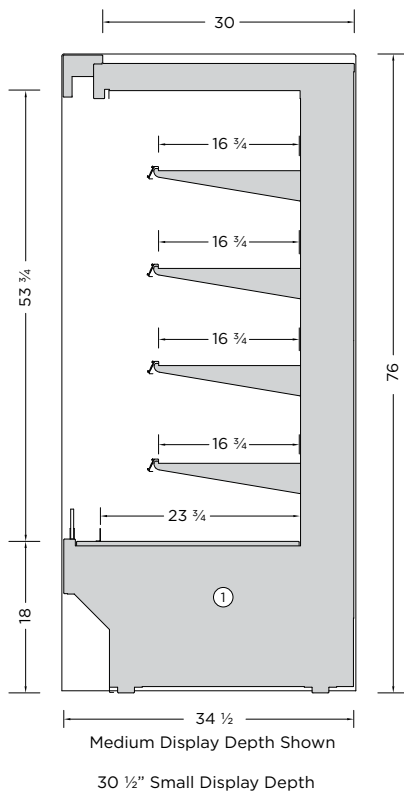

MODEL	LENGTH
SSL-3876-M	36 1/4"
SSL-4876-M	48 1/4"
SSL-6076-M	60 3/8"
SSL-7276-M	72 1/2"
SSL-9676-M	96 1/2"

Length does not include end panels. Add 1" per panel.

FEATURES:

- Two display depths available, refer to the dimensioned illustration. ①
- Remote refrigeration option only for this display profile.
- Many exterior finish options, powdercoat paint, brushed stainless steel, laminates, and natural wood finishes.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- The LED lighting is available in various light intensities/spectrums.
- Medium display depth: 4-16" (Small display depth: 4-14") adjustable metal shelves with integrated front product stop.
- Many display options offered. Refer to the options schedules on the next page.
- Engineered for serviceability and flexibility.
- Removeable base deck panels for easy cleaning and service.
- ETL electrical certification and NSF 7 standards.

Note: Information and specifications may change due to engineering improvements.



SSL - UPRIGHT SELF SERVICE DISPLAY FIVE LEVEL 76”H UPRIGHT MEDIUM DEPTH SELF SERVICE DISPLAY - REMOTE REFRIGERATION

 REFRIGERATED

TECHNICAL SPECS (REMOTE REFRIGERATION)						
MODEL	LENGTH	VOLTS	AMPS	PLUG	BTUH	SUCTION
SSL-3876-M	36 ¼”	115	1.4	NEMA 5-15P	4870	20F
SSL-4876-M	48 ¼”	115	1.4	NEMA 5-15P	5975	20F
SSL-6076-M	60 ¾”	115	1.4	NEMA 5-15P	7170	20F
SSL-7276-M	72 ½”	115	1.9	NEMA 5-15P	9560	20F
SSL-9676-M	96 ½”	115	2.1	NEMA 5-15P	11950	20F

STANDARD FEATURES:

- Remote refrigeration.
- Medium display depth 34 ½” or small display depth 30 ½”.
- Three interior finish options, textured powdercoat black, white or brushed stainless steel.
- Black or white painted front exterior metal décor pan with a 5” vertical flat panel.
- LED light strips are mounted on the top ledge of the display area and under each shelf level.
- 4-16” adjustable metal shelves with integrated front product stop.

EXTERIOR FINISHES
Formica laminate finish: ____
Other laminate finish (specify): ____
Brushed Stainless Steel
Oak Veneer Plywood
Birch/Maple Veneer Plywood
- Vertical grain direction
- Horizontal grain direction
- Clear Finish
- Stain Finish
1” black McCue impact bumper strip applied to the front of the display
Other McCue impact bumper sizes and colors available

END PANELS
The same interior/exterior laminate
Brushed stainless steel interior
Mirrored laminate interior
Thermal glass pane
1” black McCue impact bumper strip applied to the end panel
Other McCue impact bumper sizes and colors available

MISCELLANEOUS OPTIONS
Additional metal shelf with integrated LED lighting
Aluminum or painted price tag mould attached to the front of the shelves
Plastic price stripping attached to the front of the shelves
4”h x 6 ½”d 3 Tier stepped riser
4”h x 5 ¼”d 4 Tier stepped riser
2 ½”h x 13”d Single step riser
4”h x 9”d Single step riser
Clip-in angled base inlay

ADDITIONAL FEATURES:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only.
- 1 year parts and labor warranty.